

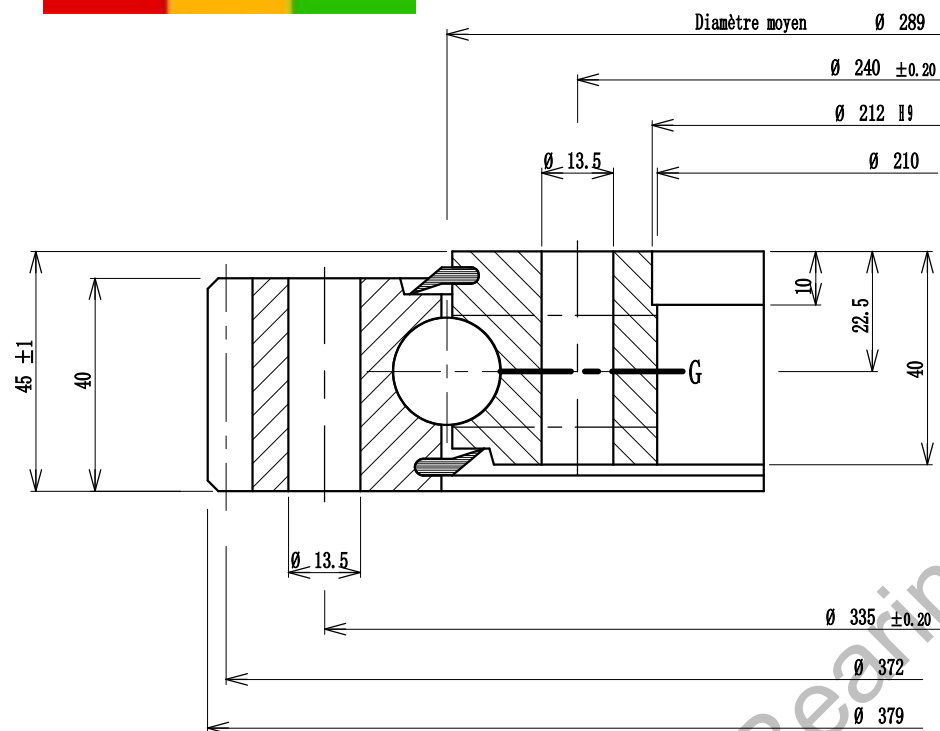





Implantation suivant A
Implantation according to A
Ansicht nach A

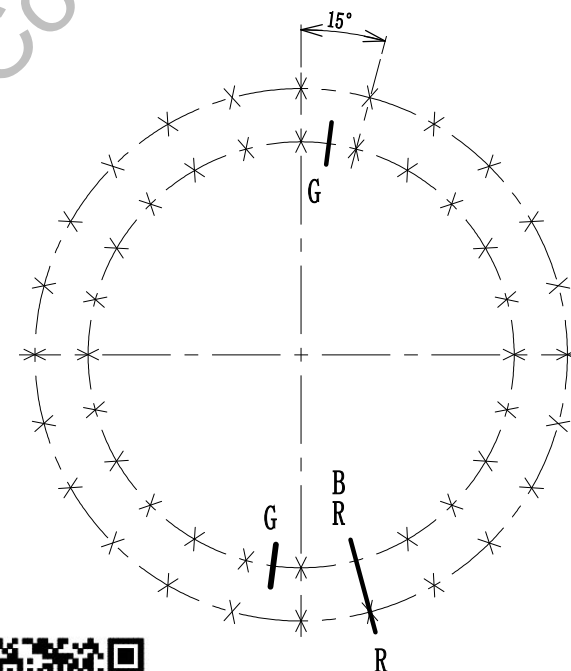

Denture - Gear - Verzahnung	
Droite	
Module 4	Angle de pression 20°
Module - Modul	Pressure angle
Diametral pitch 92	Engriffswinkel 0.50
Nbr. de dents - Zahnzahl	Troncature - Kopfkürzung
Diamètre primitif 368	
Pitch diameter - Teilkreissdurchmesser	
Report 2 m d 4	
Add. mod. 2 m d - Profilverschiebung 2 m d	
Cote sur 11 dents 130.314	
Measurement on teeth 130.194	
Zahnmesserweite bei Zähnen	
Faux rond au diamètre primitif - Run out on P.D.	
Rundlauffehler am Teilkreis	
Non trempée 0.32	Trempée 0.42
No hardened	Hardened
Ungehärtet	Gehärtet

Tolérances générales suivant IT-ETR-061	
General tolerances according to IT-ETR-061	
Allgemeine toleranzen nach IT-ETR-061	
X	
(B.E. 24	Trous de fixation $\emptyset$ 13.5
(O.R. 24	Mounting holes
(A.R. 24	Befestigungsborengen
(B.I. 24-1	Trous de fixation $\emptyset$ 13.5
(I.R. 24-1	Mounting holes
(J.R. 24-1	Befestigungsborengen
(B.E. 2	Trous de graisseurs
(O.R. 2	Grease holes
(A.R. 2	Schmierbohren
(B.I. 2	Trous de graisseurs M 10 x 1.00
(I.R. 2	Grease holes
(J.R. 2	Schmierbohren

B	Position approximative du bouchon et du raccord de trempée
R	Filler plug and hardening connection of raceway
	ca Stopfen - und heerteschlupf - position



Masse estimée 20 kg	Estimated weight
Gewicht ca 20 lbs	
Estimated weight	
Des.	
Date.	
Ver.	
Date.	
Ech.	

N° 01-0289-06	
Indice A	
Luoyang JCB Bearing Technology Co., Ltd	
Add: No.3 Lianmeng road, Luoyang, Henan, China.	
Postal: 471003	
Phone: +86-379-68611678	
Fax: +86-379-68611679	
E-mail: sales@jcb-bearing.com	