

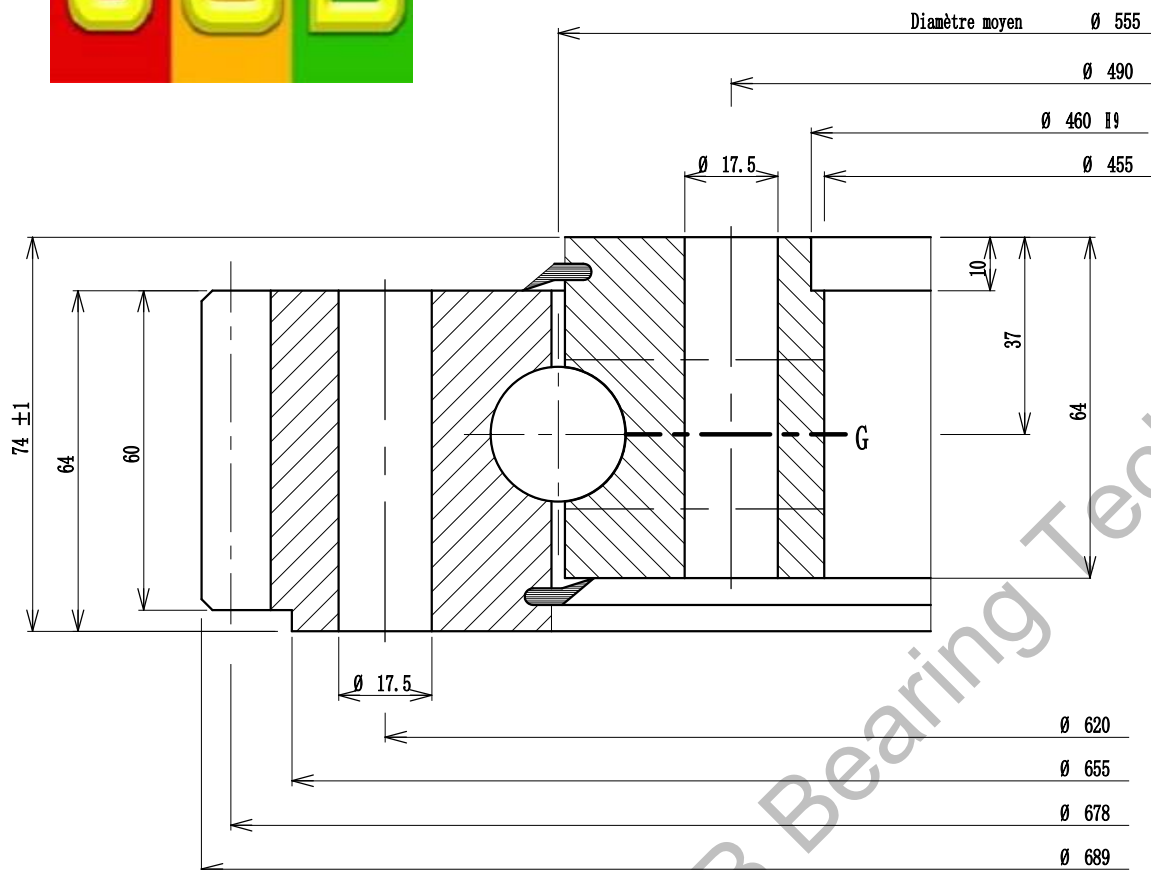




Implantation suivant A

Implantation according to A

Ansicht nach A

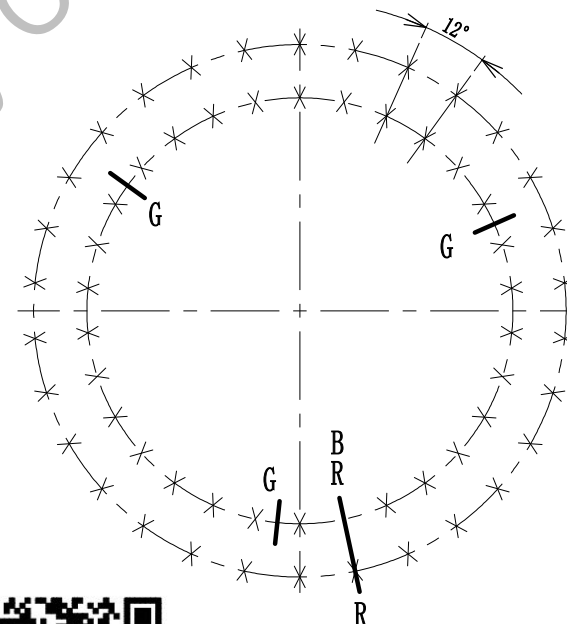

Denture - Gear - Verzahnung Droite		Tolérances générales suivant IT-ETR-061 General tolerances according to IT-ETR-061 Allgemeine toleranzen nach IT-ETR-061						Masse estimée  kg Gewicht ca  lbs Estimated weight 	N° 01-0555-01		
Module 6	Angle de pression 20°	X	B.E. 30	Trous de fixation Ø 17.50	equiv.	Des.	Date.	Ver.	Date.	Ech.	Indice A
Module - Modul	Pressure angle		O.R.	Mounting holes	equiv.						
Diametral pitch 112	Engriffswinkel 0.50		A.R.	Befestigungsborengen	gl. Abst.						
Nbre de dents 112	Troncature - Kopfkurzung		B.I. 30-1	Trous de fixation Ø 17.50	equiv.						
Diamètre primitif 672		G	I.R.	Mounting holes	equiv.	Des.	Date.	Ver.	Date.	Ech.	Indice A
Pitch diameter - Teilkreisdurchmesser			J.R.	Befestigungsborengen	gl. Abst.						
Report 2 m d 6			B.E.	Trous de graisseurs	equiv.						
Mod. 2 m d - Profilverschöbung 2 m d			O.R.	Grease holes	equiv.						
Cote sur 13 dents 232.566		B	A.R.	Schmierborengen	gl. Abst.	Des.	Date.	Ver.	Date.	Ech.	Indice A
Measurement on teeth 232.386			B.I. 3	Trous de graisseurs M 10 x 1.00	equiv.						
Zahnessweite bei Zahnen			I.R.	Grease holes	equiv.						
Faux rond au diamètre primitif - Run out on P.D. Rundlauffehler am Teilkreis			J.R.	Schmierborengen	gl. Abst.						
Non trempée 0.36	Trempée	B Position approximative du bouchon et du raccord de trempée				JPS					
Ungehärtet	Gehärtet	R Filler plug and hardening connection of raceway ca Stopfen - und heerteschlupf - position				Visa					

Luoyang JCB Bearing Technology Co., Ltd

Add: No.3 Lianmeng road,Luoyang,Henan,China

Postal: 471003

Phone: +86-379-68611678

Fax: +86-379-68611679

E-mail: sales@jcb-bearing.com