
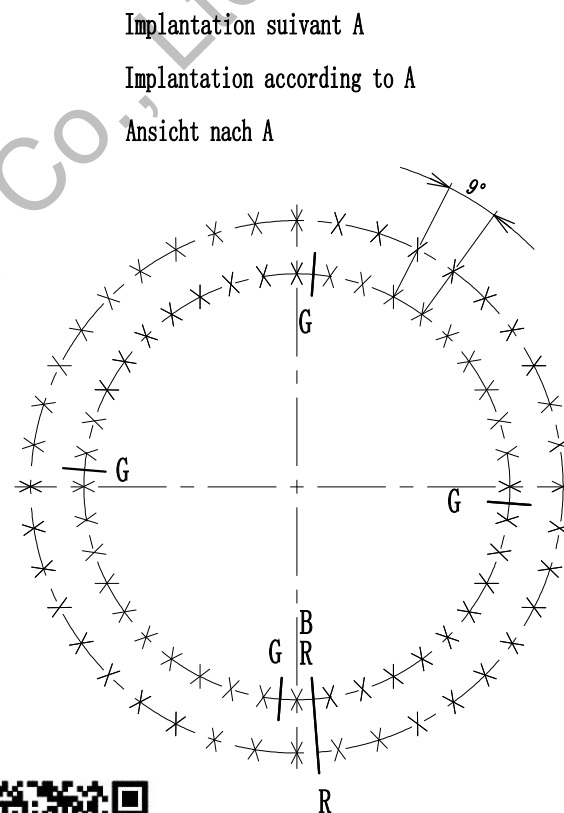




Denture - Gear - Verzahnung		Droite		Tolérances générales suivant IT-ETN-061 General tolerances according to IT-ETN-061 Allgemeine toleranzen nach IT-ETN-061								Masse estimée Gewicht ca Estimated weight	328 kg lbs	N° 01-1180-00
Module 10 Module - Modul Diametral pitch Nr. of teeth - Zahnzahl Truncature - Kopfkürzung Diamètre primitif Pitch diameter - Teilkreissdurchmesser Add. mod. 2 m d Add. mod. 2 m d - Profilverschiebung 2 m d Cote sur 16 dents Measurement on teeth Zahnmesseweite bei Zähnen Run out on P.D. Rundlauffehler am Teilkreis		Angle de pression 20° Ringriffswinkel 1 Troncature 1330 10 479.094 478.794		X G B.E. 40 Trous de fixation Ø 26 equid. O.R. Mounting holes equis. A.R. Befestigungsborengen gl. Abst. B.I. 40 Trous de fixation Ø 26 equid. I.E. Mounting holes equis. I.R. Befestigungsborengen gl. Abst. B.E. Trous de graisseurs Ø 26 equid. O.R. Grease holes equis. A.R. Schmierborengen gl. Abst. B.I. 4 Trous de graisseurs M 10 x 1.00 equid. I.E. Grease holes equis. I.R. Schmierborengen gl. Abst.						Des. Date. Ver. Date. Ech.		Indice A Luoyang JCB Bearing Technology Co., Ltd Add: No.3 Lianmeng road, Luoyang, Henan, China Postal: 471003 Phone: +86-379-68611678 Fax: +86-379-68611679 E-mail: sales@jcb-bearing.com		
Non trempée No hardened Ungehartet 0.53 Trempée Hardened Gehartet 0.68				B Position approximative du bouchon et du raccord de trempage R Filler plug and hardening connection of raceway ca Stopfen - und heerteschlupf - position										