

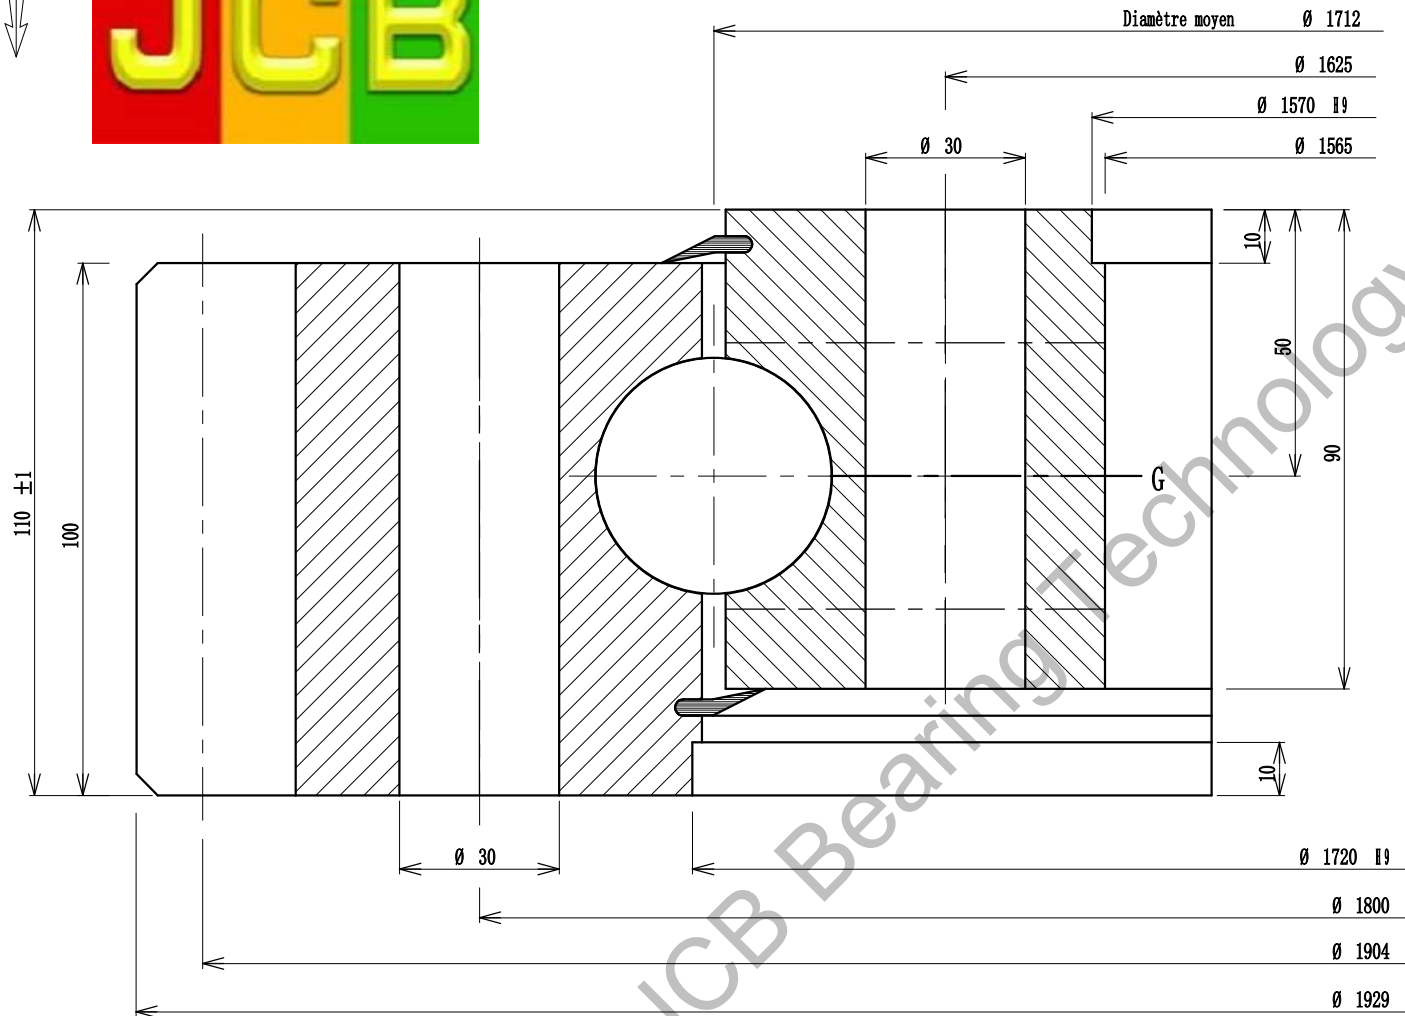




Implantation suivant A
Implantation according to A
Ansicht nach A

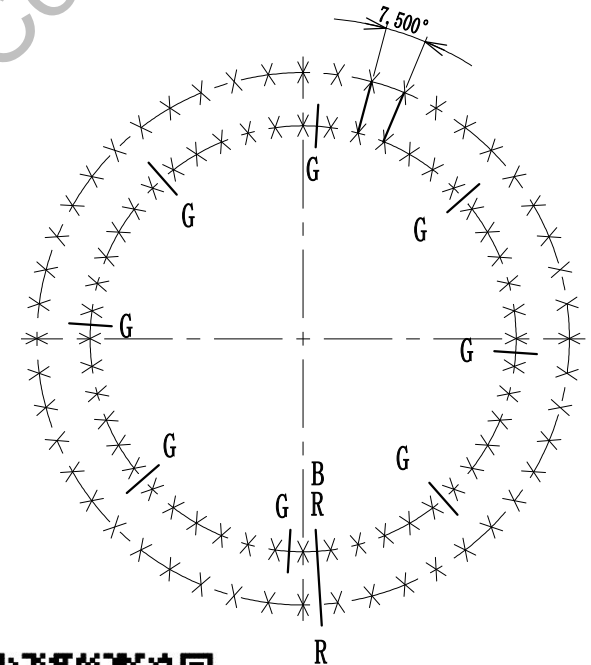

Denture - Gear - Verzahnung Droite		Tolérances générales suivant IT-ETR-061 General tolerances according to IT-ETR-061 Allgemeine toleranzen nach IT-ETR-061						Masse estimée 624 kg Gewicht ca Estimated weight lbs	N° 01-1712-00
Module 14	Angle de pression 20°	X	B.E. 48	Trous de fixation $\varnothing 30$	equid.	Des.			Indice A
Module - Modul 14	Pressure angle 20°		O.R. 48	Mounting holes $\varnothing 30$	equid.				
Diametral pitch 135	Engriffswinkel 1.50		A.R. 48	Befestigungsboreungen $\varnothing 30$	gl. Abst.				
Nbre de dents 135	Troncature - Kopfkurzung		B.I. 48	Trous de fixation $\varnothing 30$	equid.				
Diamètre primitif 1890	Troncature - Kopfkurzung	G	J.R. 48	Mounting holes $\varnothing 30$	equid.	Date.			Luoyang JCB Bearing Technology Co., Ltd
Pitch diameter - Teilkreisdurchmesser 1890	Troncature - Kopfkurzung		O.R. 48	Trous de graisseurs	equid.				
Report 2 m d 14	Troncature - Kopfkurzung		A.R. 48	Grease holes	equid.				
Add. mod. 2 m d 14	Troncature - Kopfkurzung		B.I. 8	Trous de graisseurs	gl. Abst.				
Cote sur 16 dents 671.311	Troncature - Kopfkurzung	B	J.R. 8	Grease holes	equid.	Ver.			Add: No.3 Lianmeng road, Luoyang, Henan, China
Measurement on teeth 670.891	Troncature - Kopfkurzung		O.R. 8	Grease holes	equid.				
Zahnessweite bei Zahnen 670.891	Troncature - Kopfkurzung		A.R. 8	Schmierboreungen	gl. Abst.				
Faux rond au diamètre primitif - Run out on P.D. Rundlauffehler am Teilkreis	Troncature - Kopfkurzung		B.I. 8	Trous de graisseurs	equid.				
Non trempée 0.67	Hardened 0.87	R	Position approximative du bouchon et du raccord de trempé Filler plug and hardening connection of raceway ca Stopfen - und heerteschlupf - position			Date.			Phone: +86-379-68611678
Ungelärtet 0.67	Geartet 0.87								
								E-mail: sales@jcb-bearing.com	