

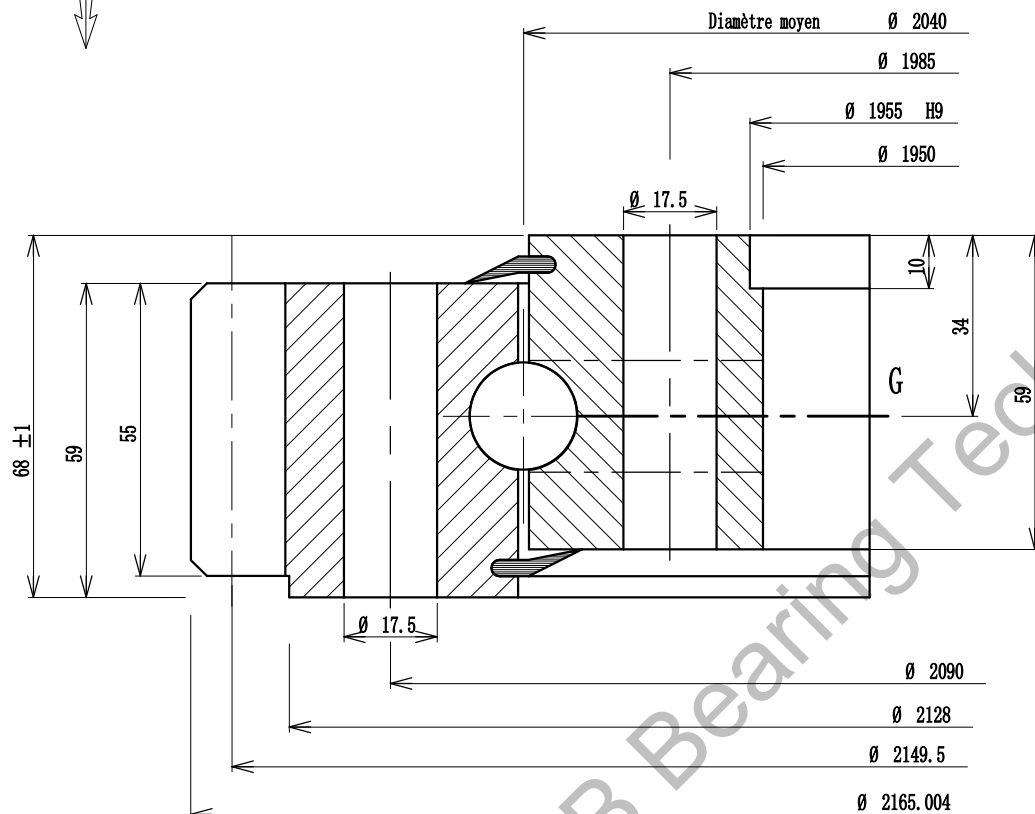




Implantation suivant A
Implantation according to A
Ansicht nach A

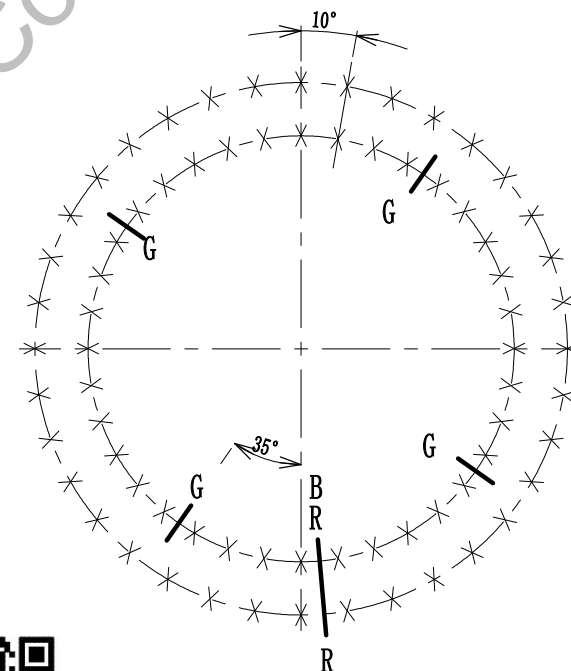

Denture - Gear - Verzahnung Droite		Tolérances générales suivant IT-ETR-061 General tolerances according to IT-ETR-061 Allgemeine toleranzen nach IT-ETR-061					Masse estimée Gewicht ca Estimated weight	— 278 — kg — lbs	N° 01-2040-03
Module — 8	Angle de pression 20° Pressure angle Eingriffswinkel	36	Trous de fixation Mounting holes Befestigungsboreungen	Ø 17.50	equiv. equiv.				Indice A
Module - Modul — 8	Troncature — 0.25 Truncature — Kopfkürzung	36	Trous de fixation Mounting holes Befestigungsboreungen	Ø 17.50	gl. Abst. equiv.	Des. —			
Nr. of teeth - Zahnzahl — 269	Diamètre primitif — 2152 Pitch diameter - Teilkreissdurchmesser	36	Trous de graisseurs Grease holes Schmierbohrungen		gl. Abst. equiv.	Date. —			
Import 2 m d — -2.5 Add. mod. 2 m d - Profilverschiebung 2 m d	Cote sur 31 dents — 749.070 Zahnmessweite bei Zähnen	4	Trous de graisseurs Grease holes Schmierbohrungen	M 10 x 1.00	gl. Abst. equiv.	Ver. —			
Measurement on teeth — 748.830 Zahnmessweite bei Zähnen	Faux rond au diamètre primitif - Run out on P.D. Rundlauffehler am Teilkreis					Date. —			
Non trempée No hardened Ungehärtet	0.74					Ech. —			
Trempée Hardened Gehärtet	0.94	B	Position approximative du bouchon et du raccord de trempé Filler plug and hardening connection of raceway ca Stopfen - und heerteschlupf - position						
		R							

Luoyang JCB Bearing Technology Co., Ltd

Add: No.3 Lianmeng road, Luoyang, Henan, China.

Postal: 471003

Phone: +86-379-68611678

Fax: +86-379-68611679

E-mail: sales@jcb-bearing.com