



A

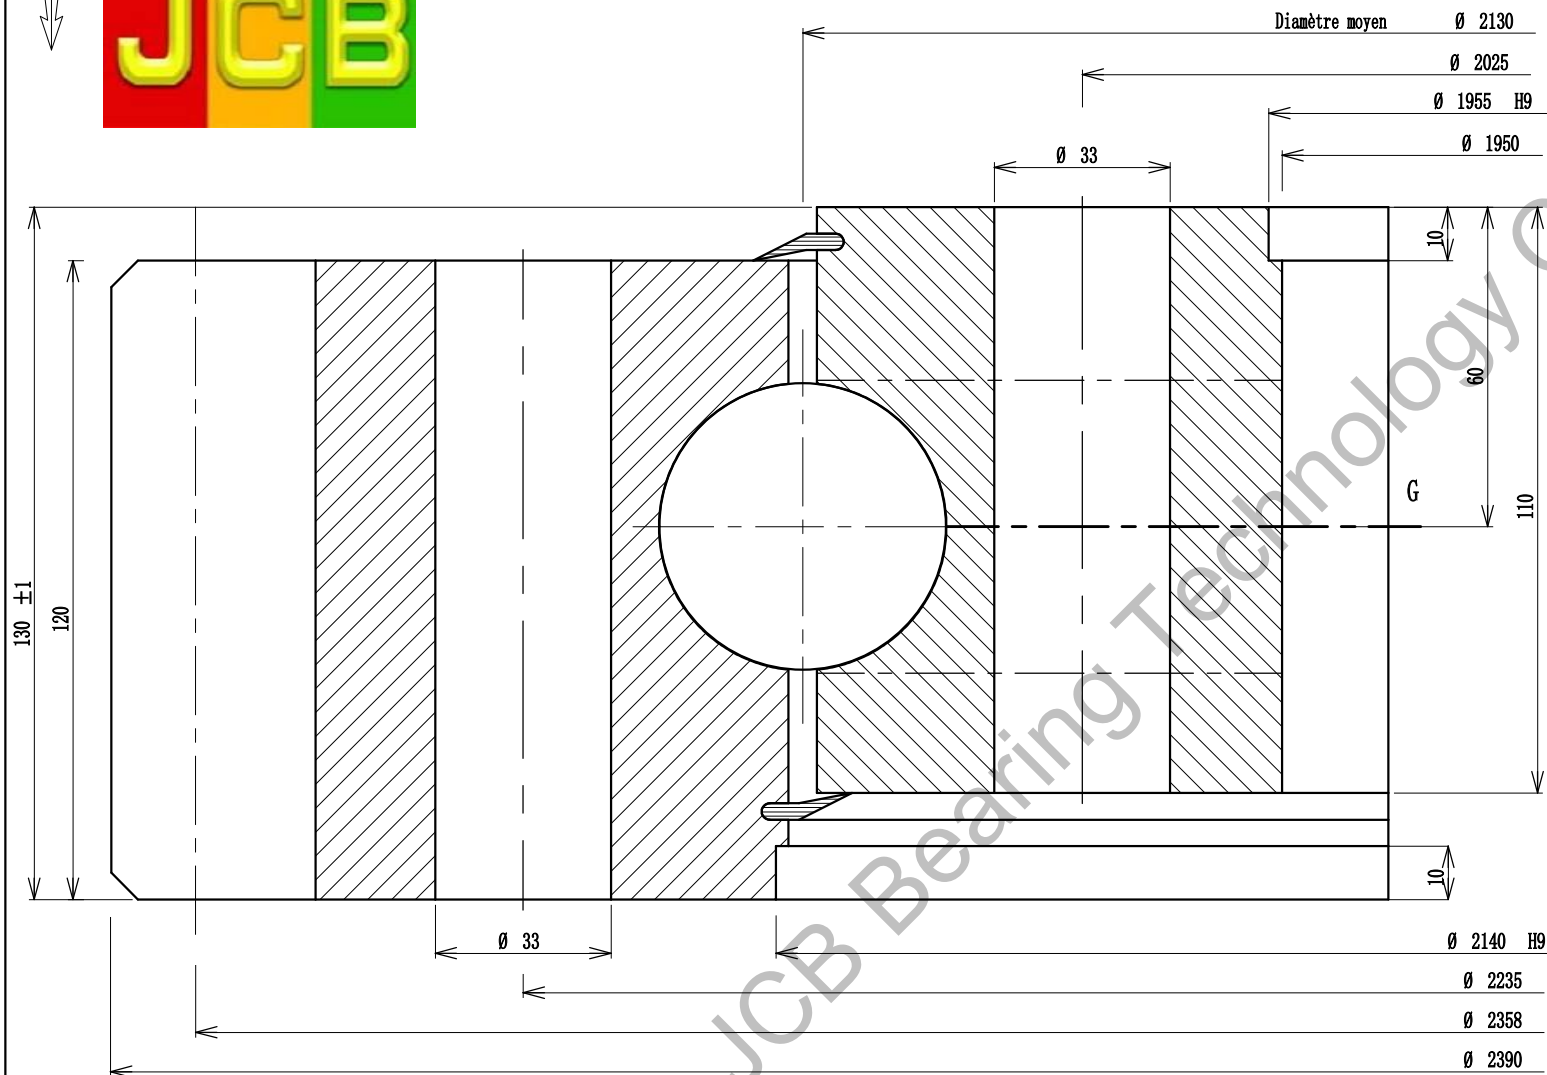

Implantation suivant A
Implantation according to A
Ansicht nach A

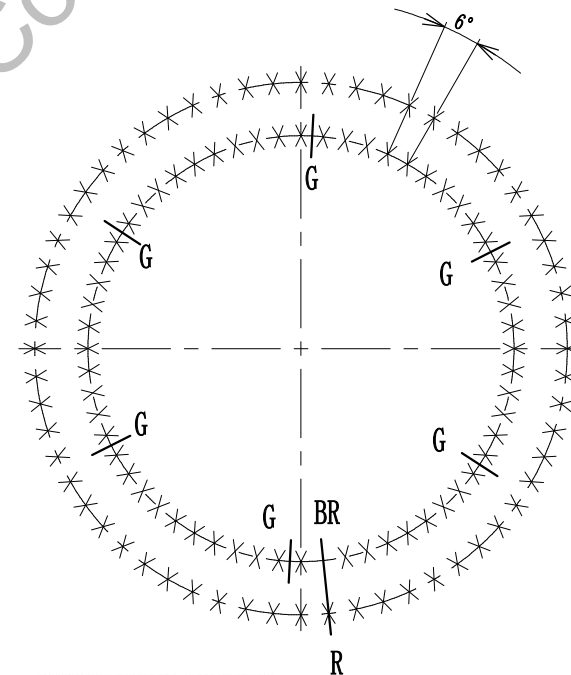

Denture - Gear - Verzahnung Droite		Tolérances générales suivant IT-ETR-061 General tolerances according to IT-ETR-061 Allgemeine toleranzen nach IT-ETR-061						Masse estimée 1163 kg Gewicht ca lbs Estimated weight	N° 01-2130-00
Module 18 Module - Modul Diametral pitch 130 Nr. of teeth - Zahnzahl Diamètre primitif 2340 Pitch diameter - Teilkreissdurchmesser Export 2 m d 18 Add. mod. 2 m d - Profilverschiebung 2 m d Cote sur 15 dents 808.840 Measurement on teeth 808.300 Zahnmessweite bei Zähnen 808.300 Faux rond au diamètre primitif - Run out on P.D. Rundlauffehler am Teilkreis	Angle de pression 20° Pressure angle Eingriffswinkel 2 Troncature 2340 Troncature - Kopfkürzung	X	R.E. 60 O.R. 60 A.R. 60	Trous de fixation Mounting holes Befestigungsboreungen	Ø 33	equiv. equiv. equiv.			Indice A
			R.I. 60-1 I.R. 60-1 I.R. 60-1	Trous de fixation Mounting holes Befestigungsboreungen	Ø 33	gl. Abst. equiv. equiv.			
			R.E. 60 O.R. 60 A.R. 60	Trous de graisseurs Grease holes Schmierboreungen		gl. Abst. equiv. equiv.			
			R.I. 60 I.R. 60 I.R. 60	Trous de graisseurs Grease holes Schmierboreungen	M 10 x 1.00	gl. Abst. equiv. equiv.			
Non trempée No hardened Ungelhartet 0.72	Trempée Hardened Gehartet 0.92	B R	Position approximative du bouchon et du raccord de trempée Filler plug and hardening connection of raceway ca Stopfen - und heerteschlupf - position						Luoyang JCB Bearing Technology Co., Ltd Add: No.3 Lianmeng road, Luoyang, Henan, China Postal: 471003 Phone: +86-379-68611678 Fax: +86-379-68611679 E-mail: sales@jcb-bearing.com