
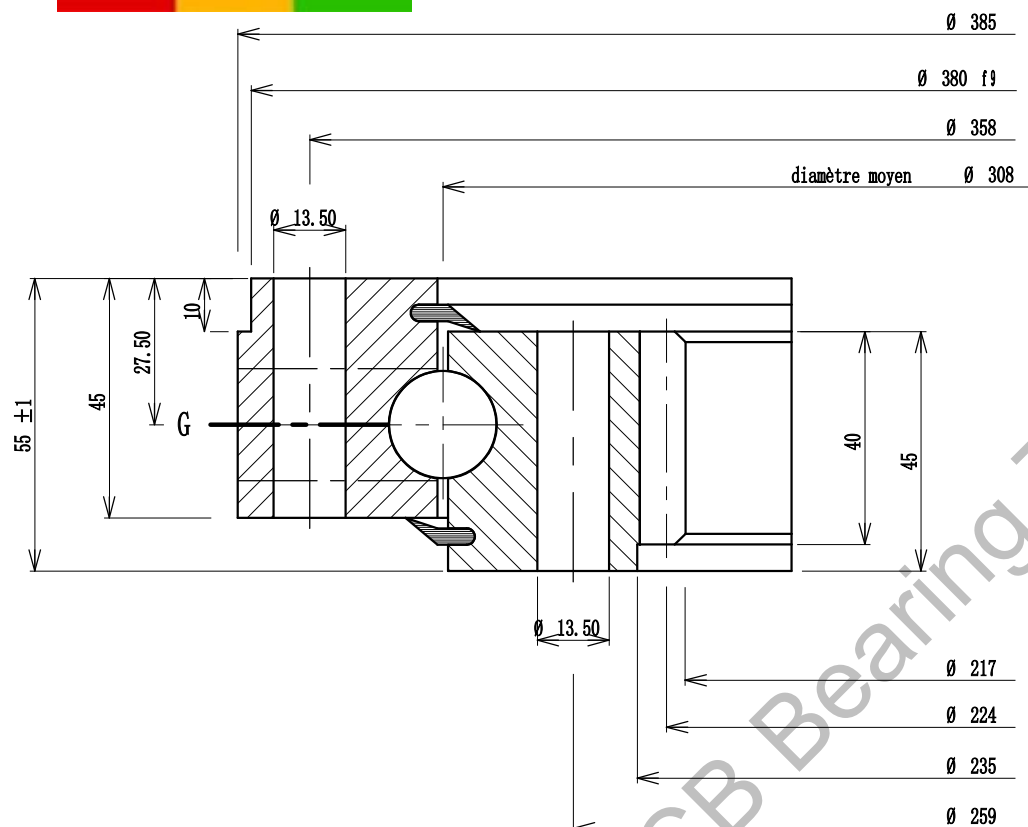




Denture - Gear - Verzahnung		Droite		Tolérances générales suivant IT-ETN-061 General tolerances according to IT-ETN-061 Allgemeine toleranzen nach IT-ETN-061				Masse estimée Gewicht ca Estimated weight		N° 02-0308-01	
Module 4 Module - Modul Diametral pitch Nbre de dents 56 Nr. of teeth - Zahnräder Diamètre primitif 224 Pitch diameter - Teilkreisdurchmesser Add. mod. 2 m d - Profilverschöbung 2 m d Cote sur 7 dents 80.195 Measurement on teeth 80.075 Zahnmesweite bei Zähnen Pour rond au diamètre primitif - Run out on P.D. Rundlauffehler am Teilkreis		Angle de pression 20° Pressure angle Eingriffswinkel 0.50 Troncature Truncature - Kopfkürzung		X B.E. 24 Trous de fixation Ø 13.50 equid. O.R. Mounting holes equis. A.R. Befestigungsboreungen gl. Abst. B.I. 24 Trous de fixation Ø 13.50 equid. I.R. Mounting holes equis. A.R. Befestigungsboreungen gl. Abst. B.E. 2 Trous de grasseurs M 10 x 1.00 equid. O.R. Grease holes equis. A.R. Schmierboreungen gl. Abst. B.I. Trous de grasseurs equid. I.R. Grease holes equis. A.R. Schmierboreungen gl. Abst.		Des. _____ Date. _____ Ver. _____ Date. _____ Ech. _____		Indice A Luoyang JCB Bearing Technology Co., Ltd Add: No.3 Lianmeng road, Luoyang, Henan, China Postal: 471003 Phone: +86-379-68611678 Fax: +86-379-68611679 E-mail: sales@jcb-bearing.com			
Non trempée No hardened Ungehartet 0.36 Trempée Hardened Gehartet 0.46		B Position approximative du bouchon et du raccord de trempage R Filler plug and hardening connection of raceway ca Stopfen - und heerteschlupf - position									