

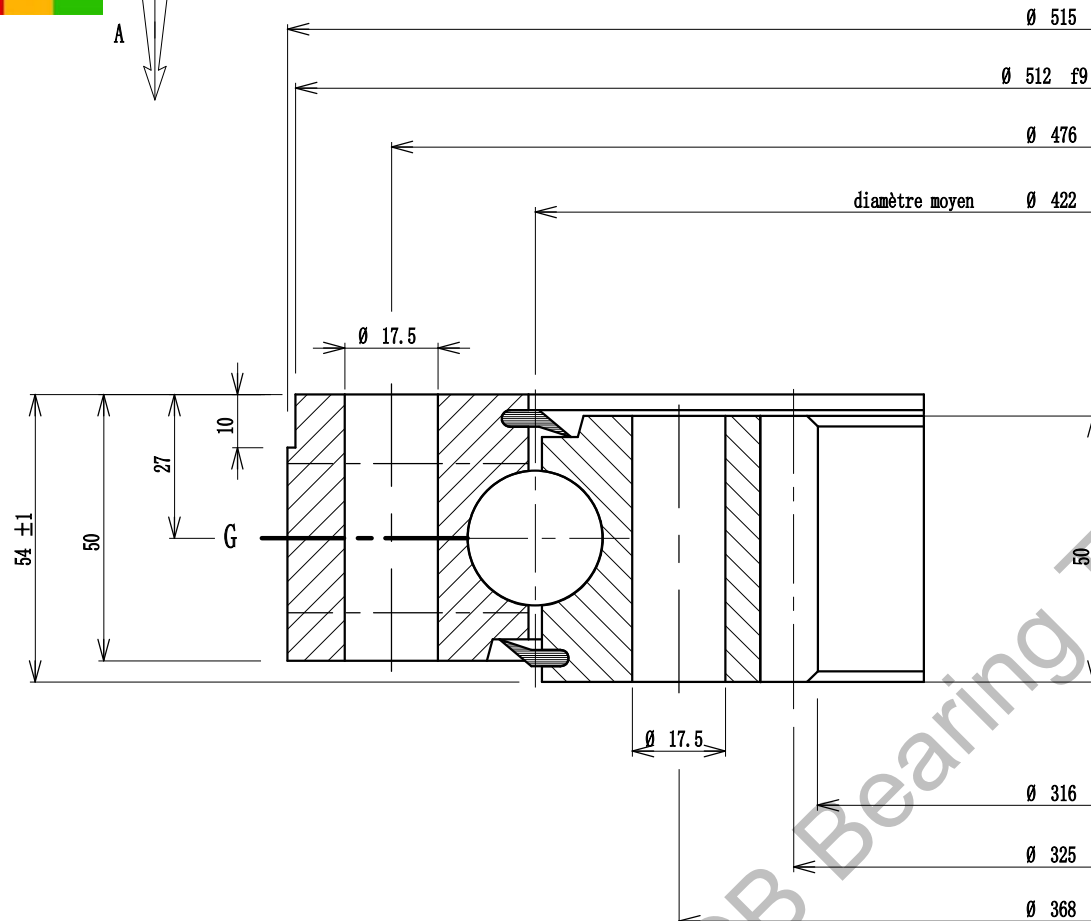




Implantation suivant A
Implantation according to A
Ansicht nach A

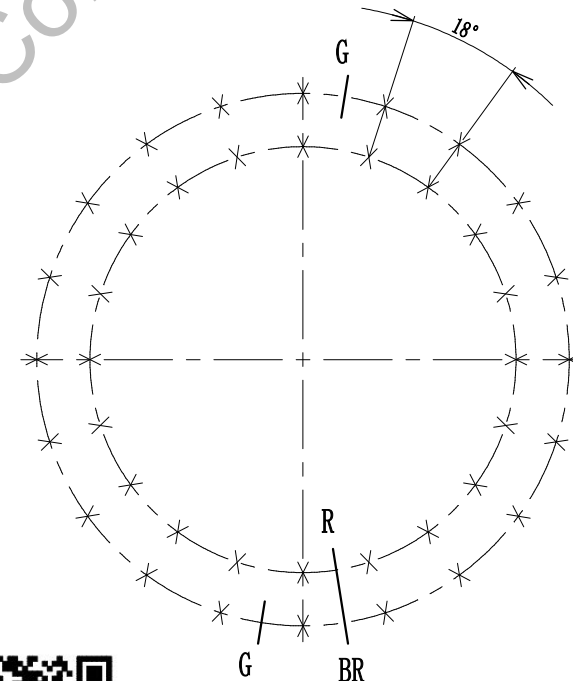

Denture - Gear - Verzahnung Droite		Tolérances générales suivant IT-ETR-061 et ISO 8015 General tolerances according to IT-ETR-061 and ISO 8015 Allgemeine toleranzen nach IT-ETR-061 und ISO 8015				Masse estimée Gewicht ca Estimated weight	47 47 kg lbs	N° 02-0422-00	
Module - Modul 5	Angle de pression Pressure angle Eingriffswinkel 20°	X	B.E. 20 Trous de fixation Ø 17.50 O.R. Mounting holes A.R. Befestigungsbohrungen	equiv. equiv. gl. Abst.		Des. _____	Date. _____	Ver. _____	Indice _____
Diametral pitch 0.50	B.I. 20 Trous de fixation Ø 17.50 I.R. Mounting holes A.R. Befestigungsbohrungen		equiv. equiv. gl. Abst.						
Nbre de dents 64	Troncature Kopfkürzung		B.E. 2 Trous de graisseurs M 10 x 1.00 O.R. Grease holes A.R. Schmierbohrungen	equiv. equiv. gl. Abst.					
Troncature - Kopfkürzung	B.I. Trous de graisseurs I.R. Grease holes A.R. Schmierbohrungen		equiv. equiv. gl. Abst.						
Diamètre primitif 320	Pitch diameter - Teilkreissdurchmesser	G				Date. _____	Ver. _____	Ech. _____	Luoyang JCB Bearing Technology Co., Ltd
Report 2 m d Add. mod. 2 m d - Profilverschleiß 2 m d									
Cote sur 8 dents 117.279									
Measurement on teeth Zahnmessweite bei Zähnen 117.129									
Faux rond au diamètre primitif - Run out on P.D. Rundlauffehler am Teilkreis									
Non trempée No hardened Ungelärtet 0.32	Trempée Hardened Gehärtet 0.42	B Position approximative du bouchon et du raccord de trempé R Filler plug and hardening connection of raceway ca Stopfen - und heertteschlupf - position						Add: No.3 Lianmeng road, Luoyang, Henan, China Postal: 471003 Phone: +86-379-68611678 Fax: +86-379-68611679 E-mail: sales@jcb-bearing.com	