

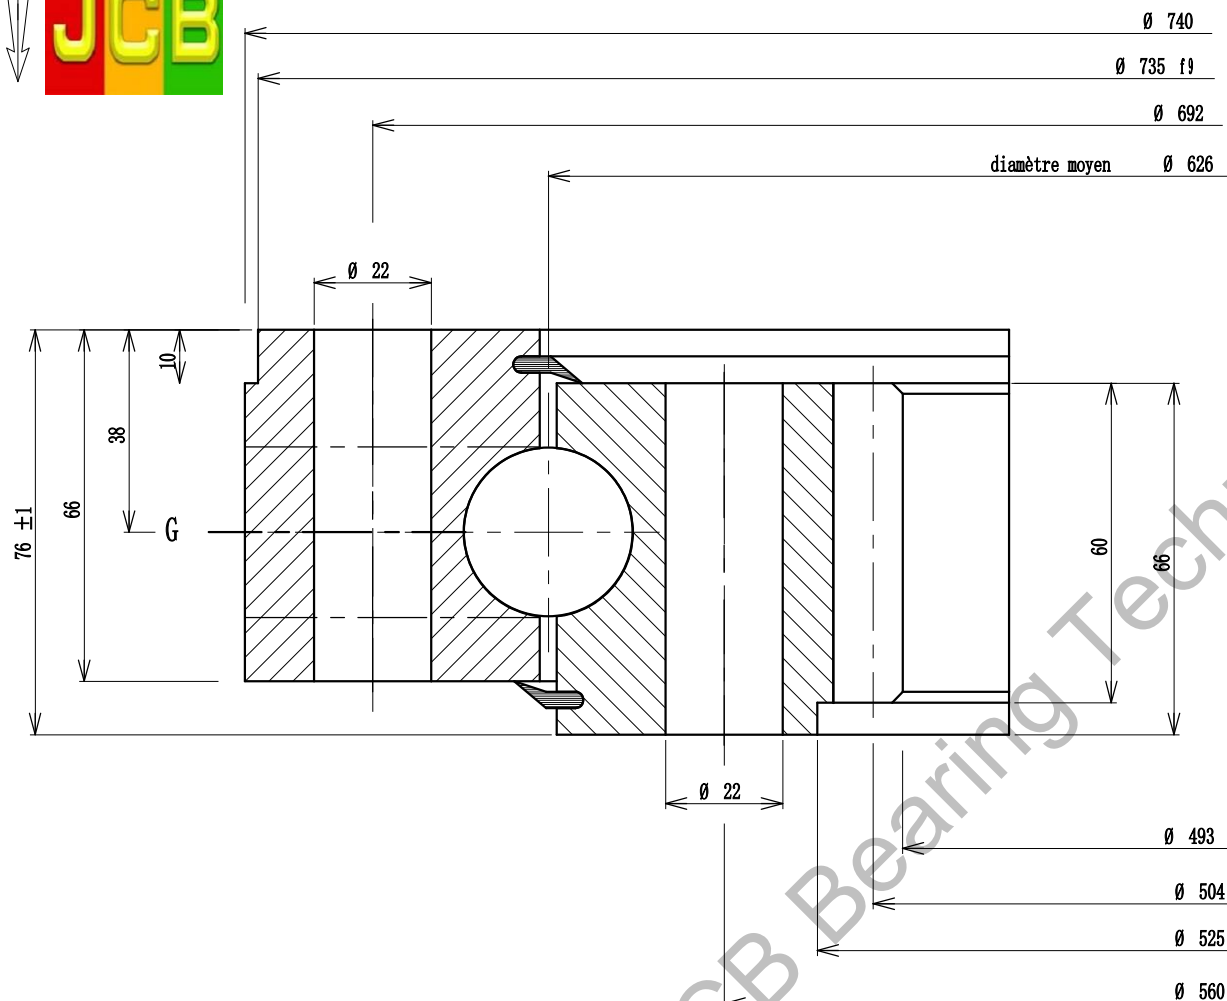



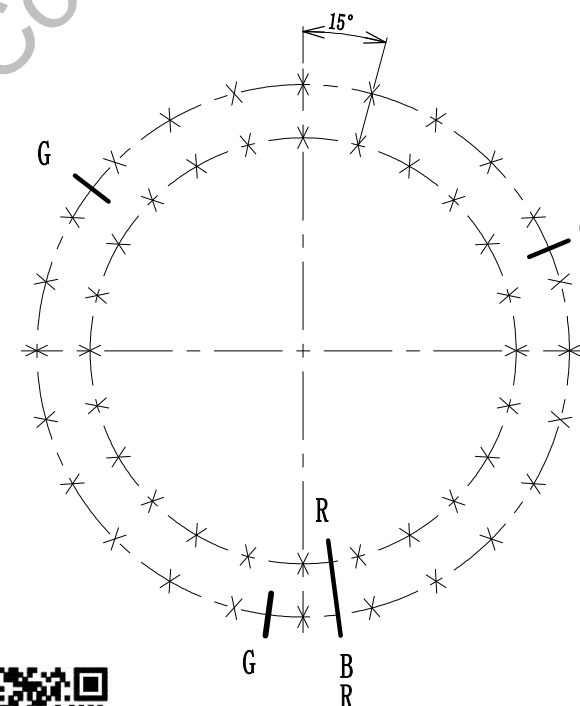

Implantation suivant A
Implantation according to A
Ansicht nach A



Denture - Gear - Verzahnung Droite		Tolérances générales suivant IT-ETR-061 General tolerances according to IT-ETR-061 Allgemeine toleranzen nach IT-ETR-061						Masse estimée Gewicht ca Estimated weight	106 kg lbs	N° 02-0626-01
Module 6	Angle de pression 20°	X	R.E. 24 Trous de fixation Ø 22 equid.	gl. Abst.			Des. _____			Indice A
Module - Modul	Pressure angle		O.R. 24 Mounting holes equis.							
Diametral pitch	Eingriffswinkel 0.50		A.R. Befestigungsborengen							
Nbre de dents 83	Troncature		R.E. 24 Trous de fixation Ø 22 equid.							
Nr. of teeth - Zahnezahl	Troncature - Kopfkurzung	G	I.R. 24 Mounting holes equis.	gl. Abst.			Date. _____			Luoyang JCB Bearing Technology Co., Ltd
Diamètre primitif 498			I.R. Befestigungsborengen							
Pitch diameter - Teilkreisdurchmesser			R.E. 3 Trous de graisseurs M 10 x 1.00 equid.							
Report 2 m d 6			O.R. 3 Grease holes equis.							
Add. mod. 2 m d - Profilverschiebung 2 m d		B	A.R. 3 Schmierborengen	gl. Abst.			Ver. _____			Add: No.3 Lianmeng road, Luoyang, Henan, China
Cote sur 10 dents 177.769			R.E. 3 Trous de graisseurs M 10 x 1.00 equid.							
Measurement on teeth 177.589			I.R. 3 Grease holes equis.							
Zahnessweite bei Zahnen			A.R. 3 Schmierborengen							
Faux rond au diamètre primitif - Run out on P.D. Rundlauffehler am Teilkreis		R	Position approximative du bouchon et du raccord de trempée Filler plug and hardening connection of raceway ca Stopfen - und heerteschlupf - position				Date. _____			E-mail: sales@jcb-bearing.com
Non trempée 0.30										
Ungehärtet										
Trémpée 0.41										
Härtet						Ech. _____				