

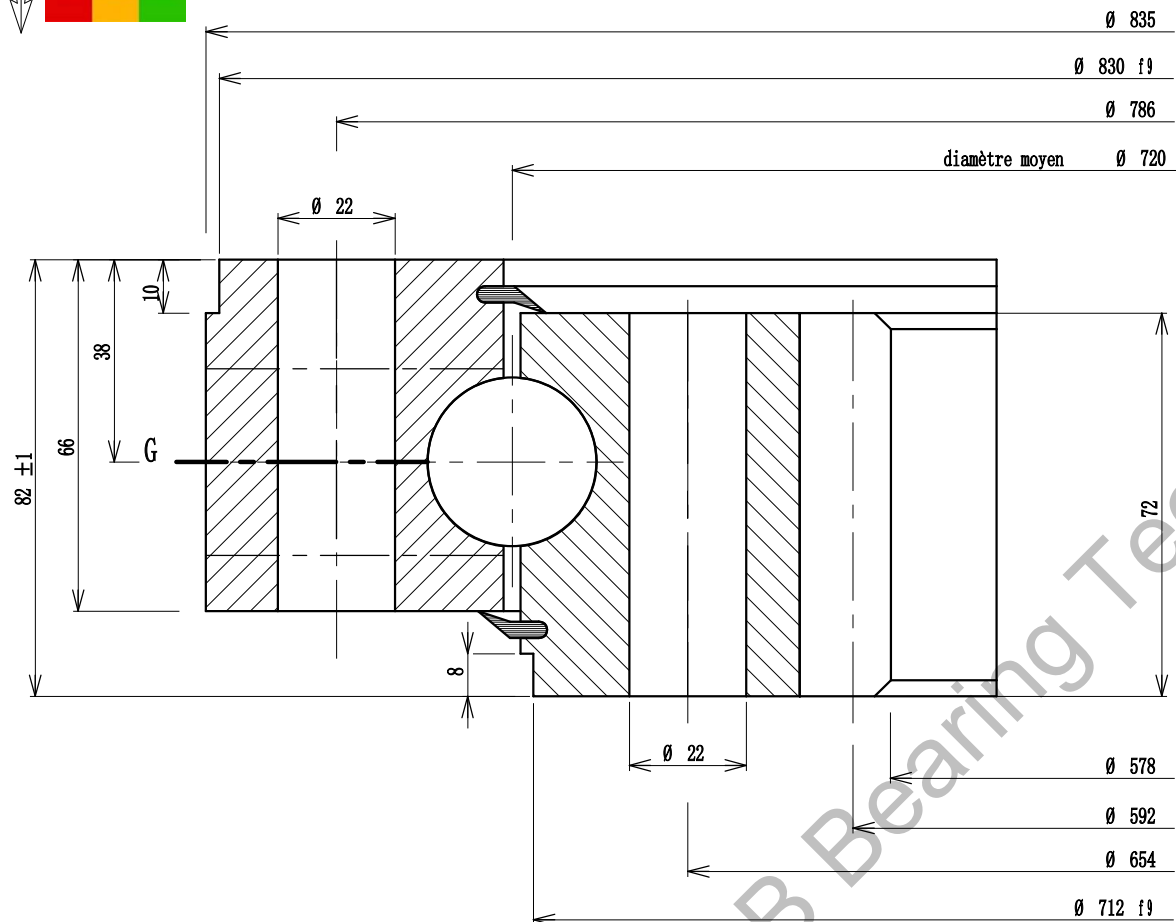




Implantation suivant A
Implantation according to A
Ansicht nach A

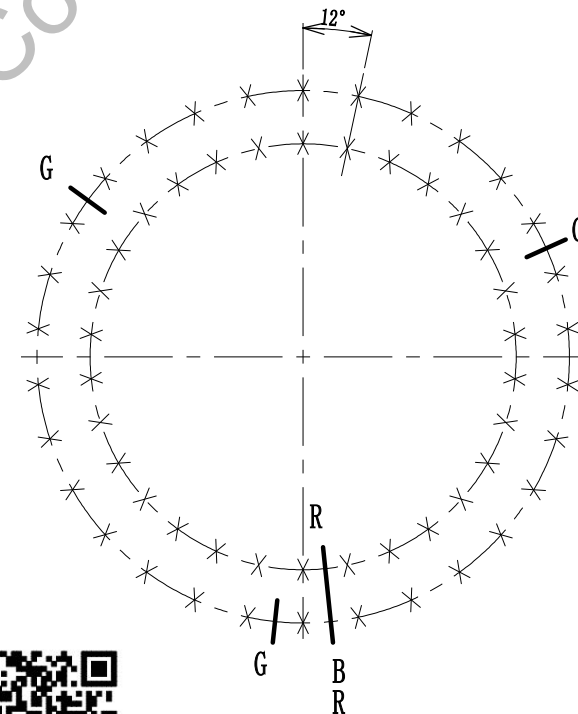

Denture - Gear - Verzahnung Droite		Tolérances générales suivant IT-ETR-061 et ISO 8015 General tolerances according to IT-ETR-061 and ISO 8015 Allgemeine toleranzen nach IT-ETR-061 und ISO 8015					Masse estimée Gewicht ca Estimated weight	130 kg lbs	N° 02-0720-02
Module 8	Angle de pression 20°	X	B.E. 30 Trous de fixation Ø 22 equid.	Des. _____					
Module - Modul	Pressure angle		O.R. 30 Mounting holes equis.		Date. _____				
Diametral pitch	Engriffswinkel 1		A.R. 30 Befestigungsborengen gl. Abst.			Ver. _____			
Nbre de dents 73	Troncature		B.E. 30 Trous de fixation Ø 22 equid.				Date. _____		
Nr. of teeth - Zahnzahl	Troncature - Kopfkürzung	I.E. 30 Mounting holes equis.	Ech. _____						
Diamètre primitif 584		I.R. 30 Befestigungsborengen gl. Abst.							
Pitch diameter - Teilkreisdurchmesser		B.E. 3 Trous de graisseurs M 10 x 1.00 equid.							
Report 2 m d 8		O.R. 3 Grease holes equis.							
Mod. 2 m d - Profilverschiebung 2 m d		A.R. 3 Schmierborengen gl. Abst.							
Cote sur 9 dents 212.279		B.E. 3 Trous de graisseurs equid.							
Measurement on teeth 212.039		I.E. 3 Grease holes equis.							
Zahnmessweite bei Zähnen		I.R. 3 Schmierborengen gl. Abst.							
Faux rond au diamètre primitif - Run out on P.D. Rundlauffehler am Teilkreis		B Position approximative du bouchon et du raccord de trempée R Filler plug and hardening connection of raceway ca Stopfen - und heerteschlupf - position							
Non trempée No hardened Ungehärtet 0.41	Trempée Hardened Gehärtet 0.51								

Luoyang JCB Bearing Technology Co., Ltd

Add: No.3 Lianmeng road, Luoyang, Henan, China

Postal: 471003

Phone: +86-379-68611678

Fax: +86-379-68611679

E-mail: sales@jcb-bearing.com