



A

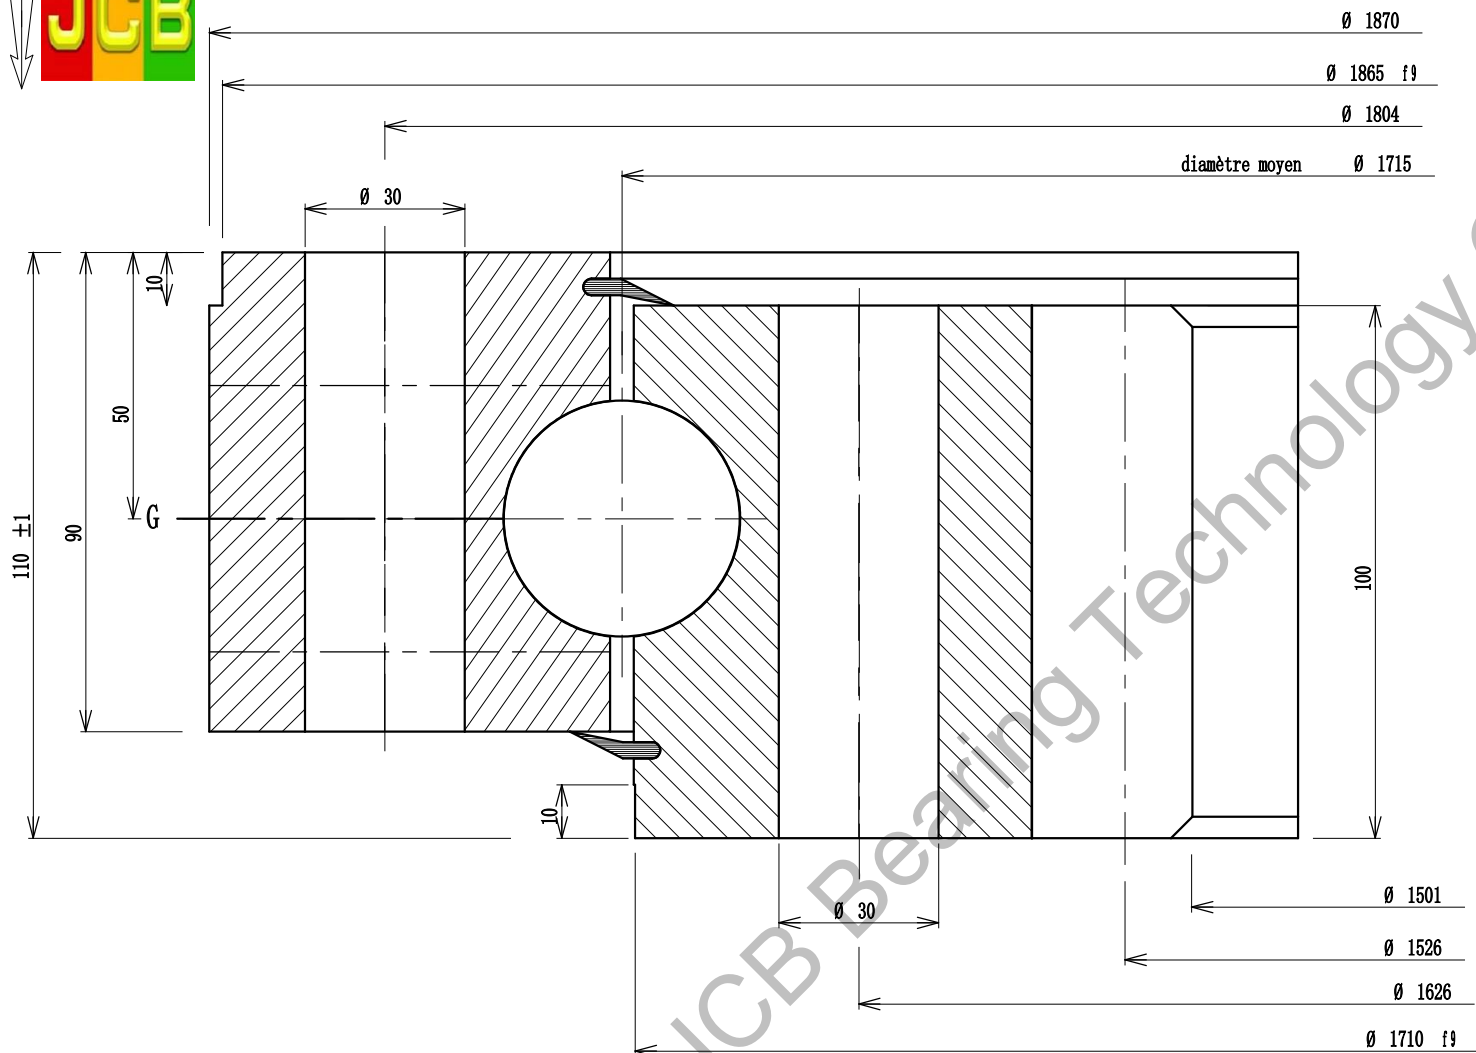

Implantation suivant A
Implantation according to A
Ansicht nach A

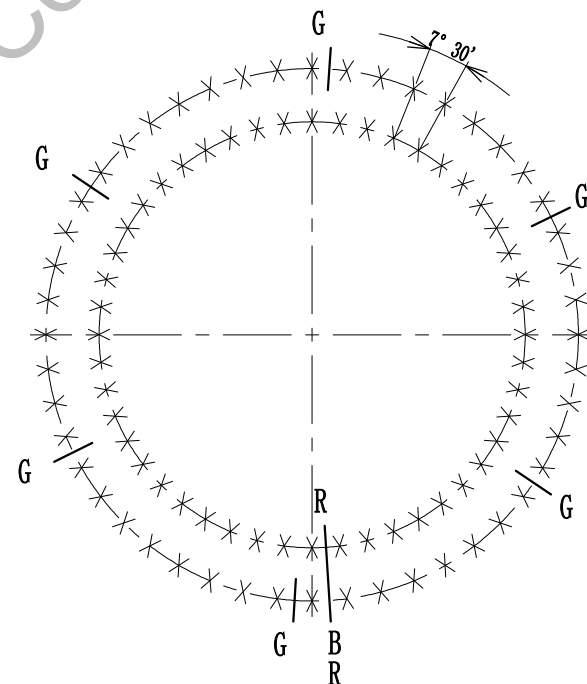

Denture - Gear - Verzahnung	
Droite	
Module 14	Angle de pression 20°
Module - Modul	Pressure angle
Diametral pitch 108	Engriffswinkel 1.50
Nbr. of teeth - Zahnzahl	Troncature
Diamètre primitif 1512	Troncature - Kopfkürzung
Pitch diameter - Teilkreissdurchmesser	
Report 2 m d 14	
Add. mod. 2 m d - Profilverschiebung 2 m d	
Cote sur 13 dents 543.720	
Measurement on teeth 543.300	
Zahnmessweite bei Zähnen	
Faux rond au diamètre primitif - Run out on P.D. Rundlauffehler am Teilkreis	
Non trempée 0.61	Trempée 0.81
Ungehartet	Gehartet

Tolérances générales suivant IT-ETR-061	
General tolerances according to IT-ETR-061	
Allgemeine toleranzen nach IT-ETR-061	
X	
B.E. 48	Trous de fixation Ø 30
O.R.	Mounting holes
A.R.	Befestigungsboreungen
B.I. 48	Trous de fixation Ø 30
I.R.	Mounting holes
I.R.	Befestigungsboreungen
B.E. 6	Trous de graisseurs M 10 x 1.00
O.R.	Grease holes
A.R.	Schmierboerungen
B.I. 6	Trous de graisseurs M 10 x 1.00
I.R.	Grease holes
I.R.	Schmierboerungen

B	Position approximative du bouchon et du raccord de trempée
R	Filler plug and hardening connection of raceway
	ca Stopfen - und heerteschlupf - position

Des.	
Date.	
Ver.	
Date.	
Ech.	

Masse estimée 615 kg	
Gewicht ca lbs	
Estimated weight	

N° 02-1715-00	
Indice A	
Luoyang JCB Bearing Technology Co., Ltd	
Add: No.3 Lianmeng road, Luoyang, Henan, China.	
Postal: 471003	
Phone: +86-379-68611678	
Fax: +86-379-68611679	
E-mail: sales@jcb-bearing.com	