


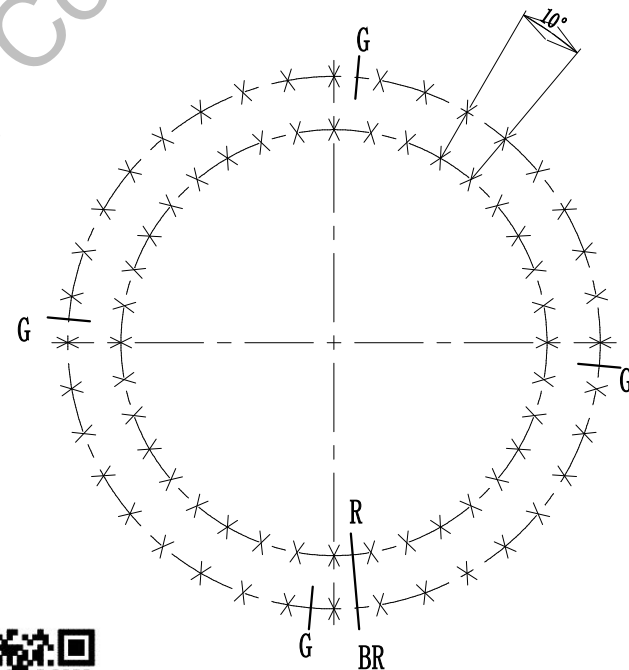

Denture - Gear - Verzahnung		Tolérances générales suivant IT-ETR-061 et ISO 8015 General tolerances according to IT-ETR-061 and ISO 8015 Allgemeine toleranzen nach IT-ETR-061 und ISO 8015										Masse estimée 305 kg Gewicht ca _____ lbs Estimated weight _____		N° 02-2040-00	
Droite														Indice A	
Module 8 Angle de pression 20° Diametral pitch 1 Nbr de dents 239 Troncature - Kopfkürzung Pitch diameter 1912 Add. mod. 2 d - Profilveränderung 2 d Cote sur 28 dents 679.736 Measurement on teeth 679.496 Zahnmesweite bei Zähnen Paux rond au diamètre primitif - Run out on P.D. Rundlauffehler am Teilkreis		X G B R		B.R.E. 36 Trous de fixation Ø 17.50 equid. O.R. Mounting holes equis. A.R. Befestigungsbohrungen gl. Abst. B.R.I. 36 Trous de fixation Ø 17.50 equid. I.R. Mounting holes equis. A.R. Befestigungsbohrungen gl. Abst. B.R.E. 4 Trous de graisseurs M 10 x 1.00 equid. O.R. Grease holes equis. A.R. Schmierbohrungen gl. Abst. B.R.I. Trous de graisseurs equid. I.R. Grease holes equis. A.R. Schmierbohrungen gl. Abst.										Add: No.3 Lianmeng road, Luoyang, Henan, China. Postal: 471003 Phone: +86-379-68611678 Fax: +86-379-68611679 E-mail: sales@jcb-bearing.com	
Non trempée 0.64 No hardened Ungehartet		Trempée 0.84 Hardened Gehartet		Position approximative du bouchon et du raccord de trempée Filler plug and hardening connection of raceway ca Stopfen - und heerteschlupf - position											