

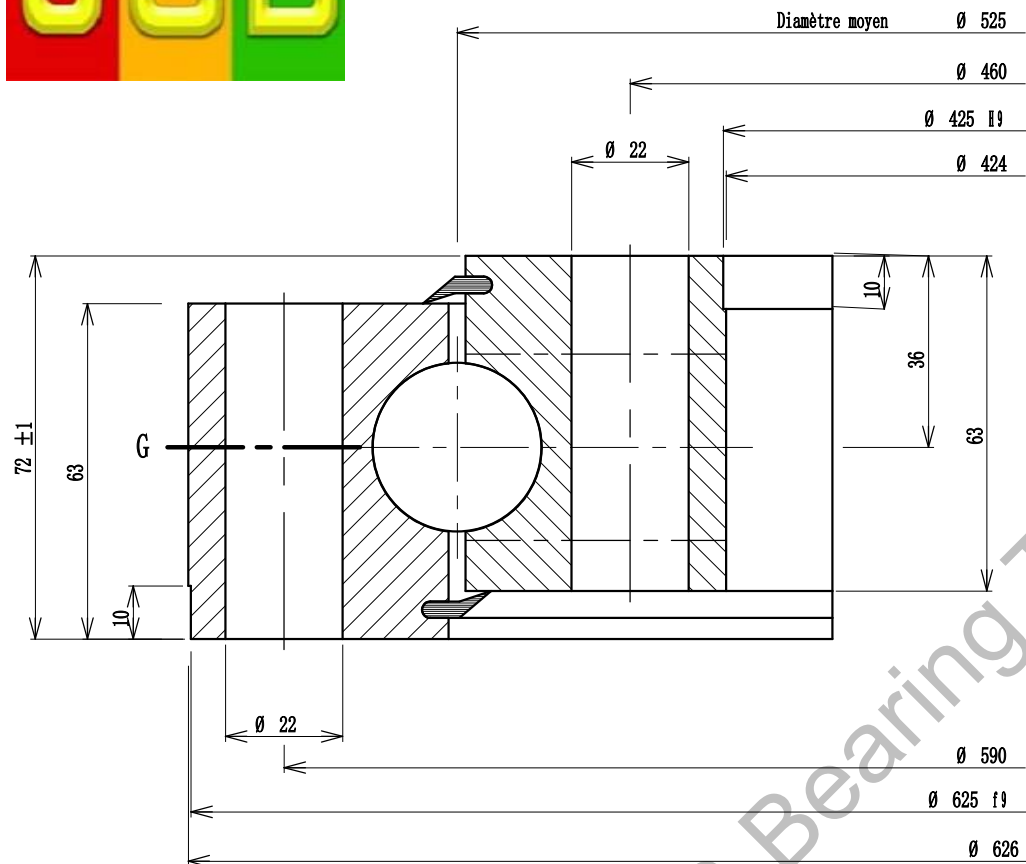


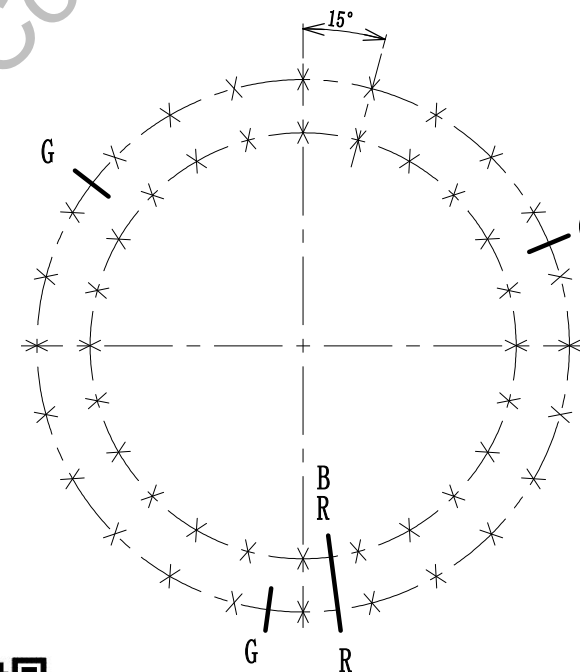

Implantation suivant A
Implantation according to A
Ansicht nach A



Denture - Gear - Verzahnung		Tolérances générales suivant IT-ETR-061 et ISO 8015 General tolerances according to IT-ETR-061 and ISO 8015 Allgemeine toleranzen nach IT-ETR-061 und ISO 8015						Masse estimée <u>73</u> kg Gewicht ca <u>73</u> lbs Estimated weight	N° <u>03-0525-01</u>
Module <u> </u> Module - Modul <u> </u> Diametral pitch <u> </u> Nb de dents <u> </u> Nr. of teeth - Zahnzahl <u> </u> Troncature - Kopfkürzung <u> </u> Diamètre primitif <u> </u> Pitch diameter - Teilkreissdurchmesser <u> </u> Export 2 m d <u> </u> Add. mod. 2 m d - Profilveränderung 2 m d <u> </u> Cote sur <u> </u> dents <u> </u> Measurement on teeth <u> </u> Zahnmessteile bei Zähnen <u> </u> Paux rond au diamètre primitif - Run out on P.D. Rundlauffehler am Teilkreis <u> </u>		X G B R				Des. <u> </u> Date. <u> </u> Ver. <u> </u> Data. <u> </u> Ech. <u> </u>		Indice <u>A</u>	
Non trempée <u> </u> No hardened <u> </u> Ungehärtet <u> </u>		Position approximative du bouchon et du raccord de trempé Filler plug and hardening connection of raceway ca Stopfen - und heerteschlupf - position						Luoyang JCB Bearing Technology Co., Ltd Add: No.3 Lianmeng road, Luoyang, Henan, China Postal: 471003 Phone: +86-379-68611678 Fax: +86-379-68611679 E-mail: sales@jcb-bearing.com	