


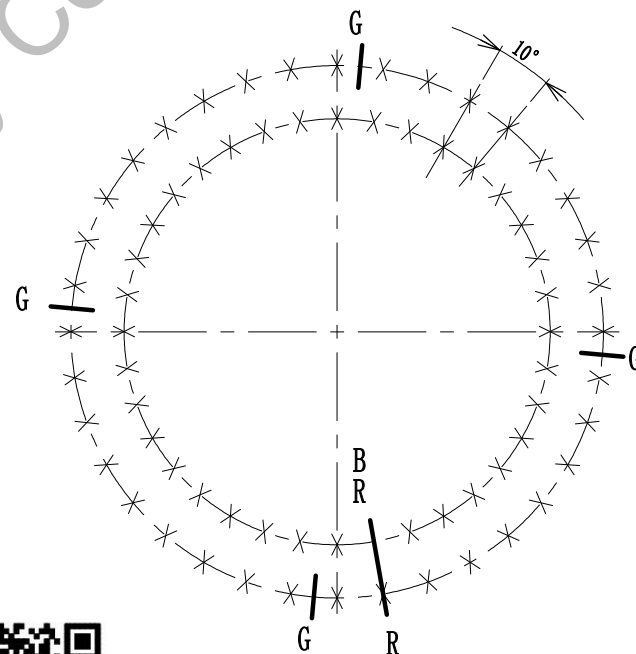

Denture - Gear - Verzahnung		Tolérances générales suivant IT-ETN-061 General tolerances according to IT-ETN-061 Allgemeine toleranzen nach IT-ETN-061						Masse estimée — 286 — kg Gewicht ca — — lbs Estimated weight		N° 03-0980-02	
Module — Angle de pression — Modul - Modul — Diametral pitch — Eingriffswinkel — Nb de dents — Troncature — Nr. of teeth - Zahnzahl — Truncature - Kopfkürzung —		X B.E. 36 Trous de fixation Ø 26 equid. O.R. Mounting holes equis. A.R. Befestigungsbohrungen gl. Abst. B.I. 36-1 Trous de fixation Ø 26 equid. I.E. Mounting holes equis. I.R. Befestigungsbohrungen gl. Abst. B.E. 4 Trous de graisseurs M 10 x 1.00 equid. O.R. Grease holes equis. A.R. Schmierbohrungen gl. Abst. B.I. Trous de graisseurs equid. I.E. Grease holes equis. I.R. Schmierbohrungen gl. Abst.				Des. — Date. — Ver. — Date. — Ech. —				Indice A	
Diamètre primitif — Pitch diameter - Teilkreissdurchmesser — Dp 2 m d — Add. mod. 2 m d - Profilveränderung 2 m d — Cote sur — dents — Measurement on teeth — Zahnmessweite bei Zähnen — Paux rod on diameter primitif - Run out on P.D. Rundlauffehler am Teilkreis —		G								Luoyang JCB Bearing Technology Co., Ltd Add: No.3 Lianmeng road, Luoyang, Henan, China Postal: 471003 Phone: +86-379-68611678 Fax: +86-379-68611679 E-mail: sales@jcb-bearing.com	
Non trempée — No hardened — Ungehärtet —		B R Position approximative du bouchon et du raccord de trempé Filler plug and hardening connection of raceway ca Stopfen - und heerteschlupf - position									