

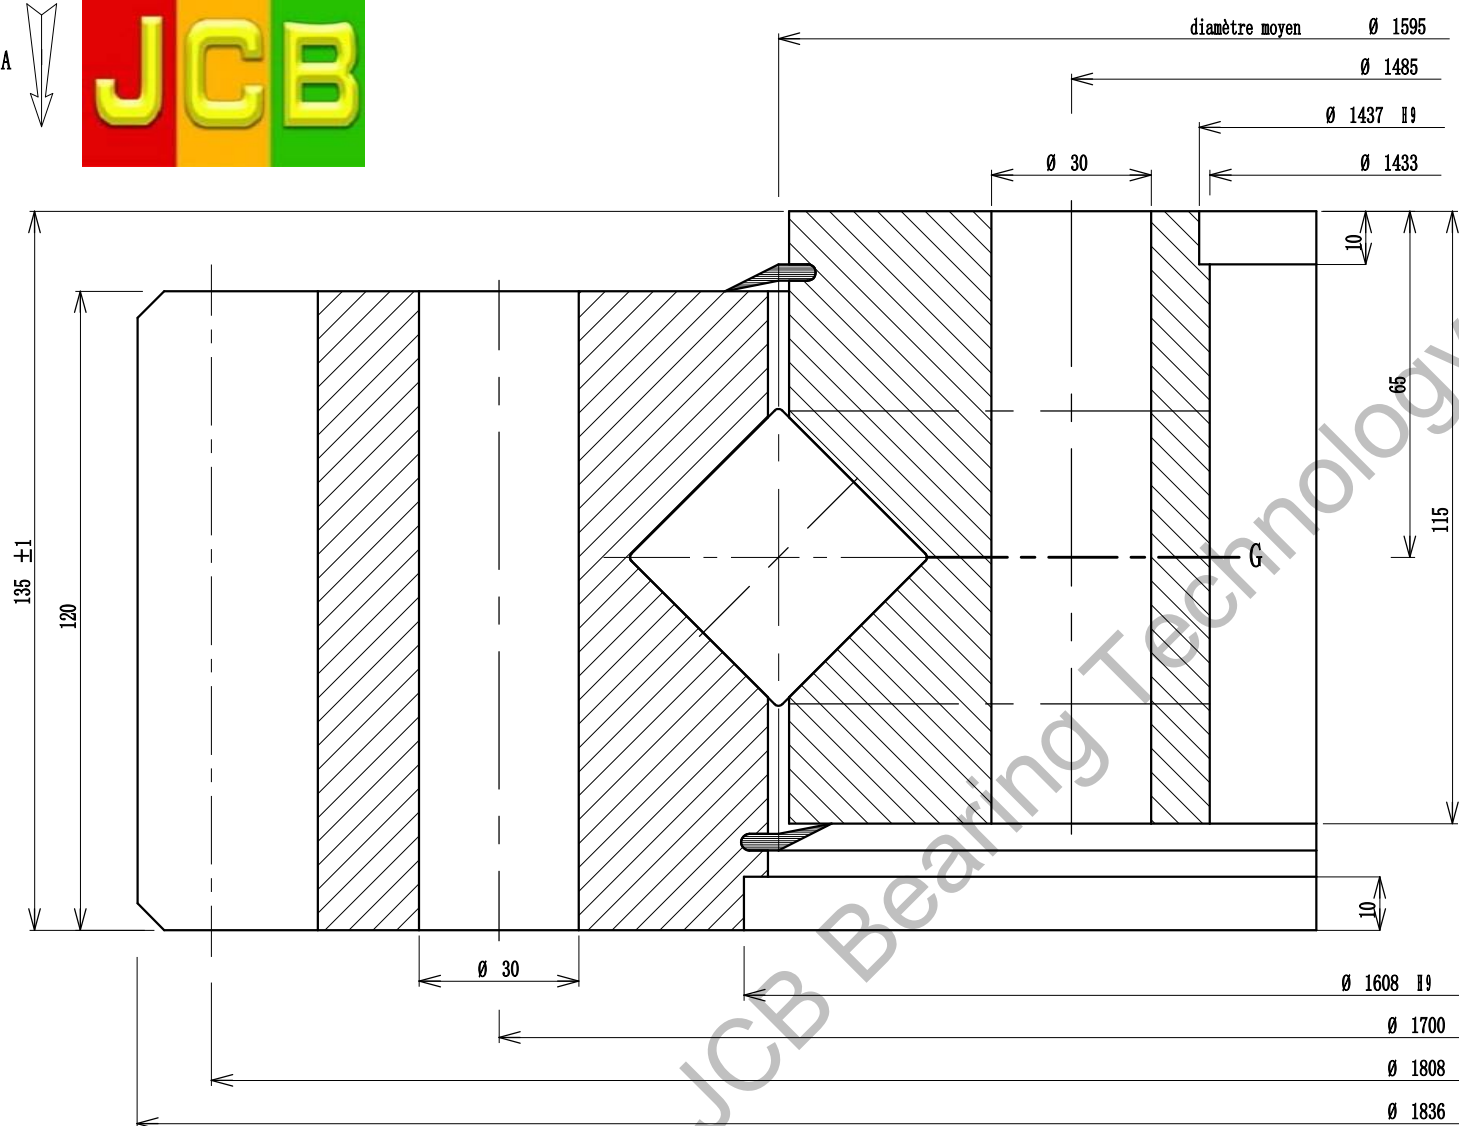



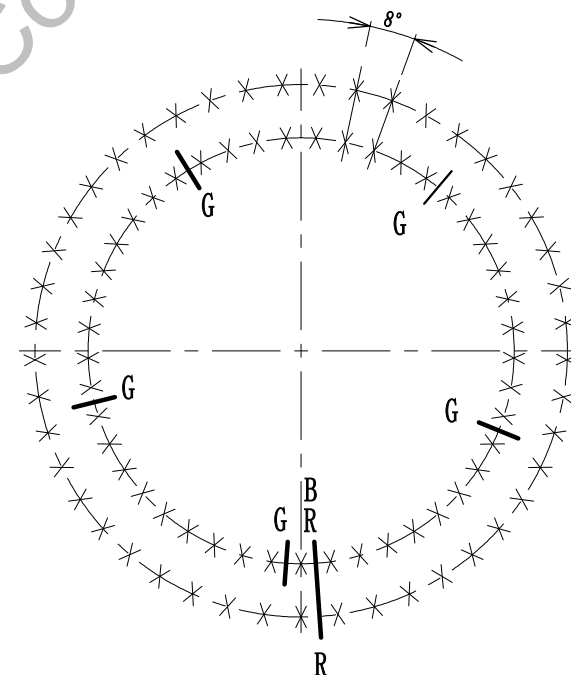

Implantation suivant A
Implantation according to A
Ansicht nach A



Denture - Gear - Verzahnung Droite		Tolérances générales suivant IT-ETR-061 General tolerances according to IT-ETR-061 Allgemeine toleranzen nach IT-ETR-061						Masse estimée 799 kg Gewicht ca lbs Estimated weight	N° 06-1595-04		
Module 16	Angle de pression 20°	X	B.E. 45 Trous de fixation Ø 30	equiv.	Des.	Date.	Ver.	Date.	Ech.	Indice A	Luoyang JCB Bearing Technology Co., Ltd Add: No.3 Lianmeng road, Luoyang, Henan, China Postal: 471003 Phone: +86-379-68611678 Fax: +86-379-68611679 E-mail: sales@jcb-bearing.com
Module - Modul 16	Pressure angle 20°		O.R. 45 Mounting holes Ø 30	equiv.							
Diametral pitch 112	Engriffswinkel 2		A.R. 45 Befestigungsboreungen Ø 30	gl. Abst.							
Nbre of teeth - Zahnzahl 1792	Troncature - Kopfkurzung		B.I. 45 Trous de fixation Ø 30	equiv.							
Diamètre primitif 1792		G	I.R. 45 Mounting holes Ø 30	equiv.							
Pitch diameter - Teilkreisdurchmesser			B.E. 45 Trous de graisseurs	gl. Abst.							
Report 2 m d 16			O.R. 45 Grease holes	equiv.							
Add. mod. 2 m d - Profilverschiebung 2 m d			A.R. 45 Schmierbohrungen	gl. Abst.							
Cote sur 13 dents 620.176		B	B.I. 5 Trous de graisseurs M 10 x 1.00	equiv.							
Measurement on teeth 619.696			I.R. 5 Grease holes	equiv.							
Zahnmessweite bei Zahnen			A.R. 5 Schmierbohrungen	gl. Abst.							
Faux rond au diamètre primitif - Run out on P.D. Rundlauffehler am Teilkreis											
Non trempée 0.65	Trempée 0.85	B Position approximative du bouchon et du raccord de trempée Filler plug and hardening connection of raceway ca Stopfen - und heerteschlupf - position									
Ungehartet	Gehartet										