

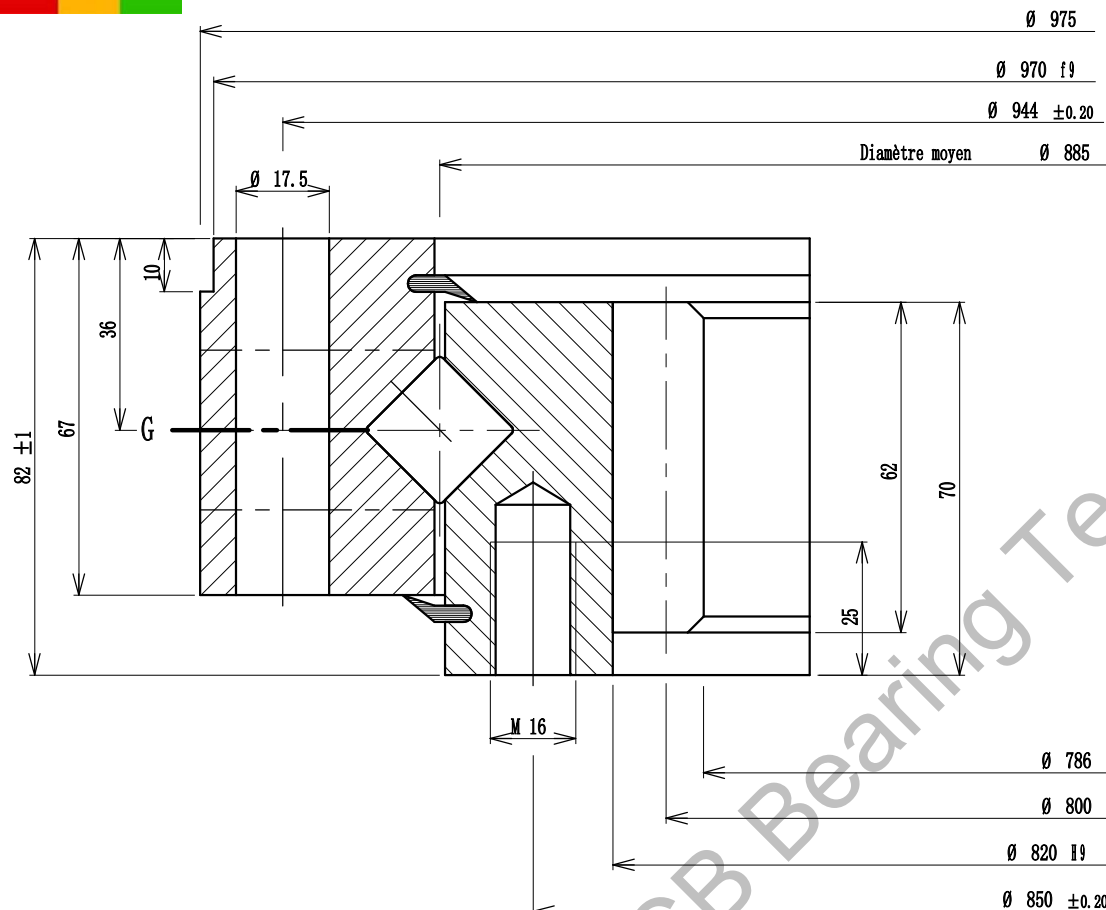




Implantation suivant A
Implantation according to A
Ansicht nach A

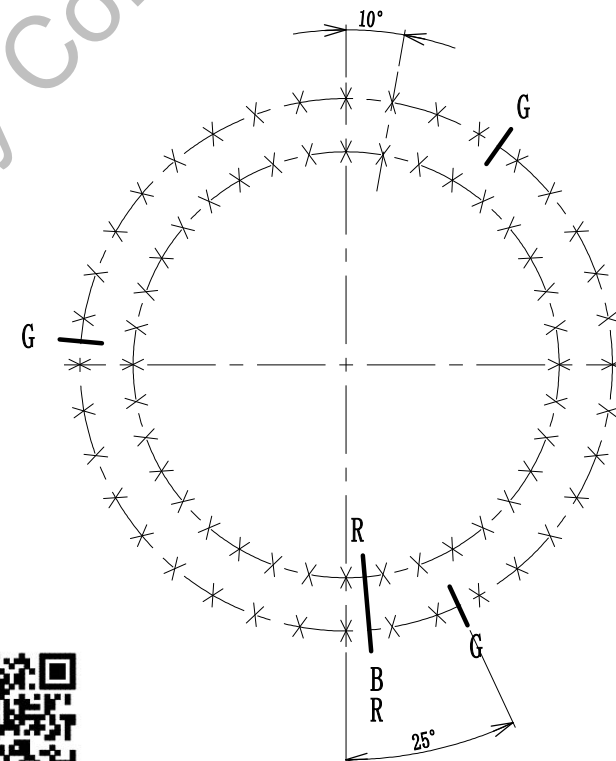

Denture - Gear - Verzahnung Droite		Tolérances générales suivant IT-ETR-061 General tolerances according to IT-ETR-061 Allgemeine toleranzen nach IT-ETR-061						Masse estimée 119 kg Gewicht ca lbs	N° 07-0885-01		
Module 8	Angle de pression 20°	X	R.E. 36 Trous de fixation Ø 17.5	equiv.	Des.	Date.	Ver.	Date.	Ech.	Indice B	Luoyang JCB Bearing Technology Co., Ltd Add: No.3 Lianmeng road, Luoyang, Henan, China Postal: 471003 Phone: +86-379-68611678 Fax: +86-379-68611679 E-mail: sales@jcb-bearing.com
Module - Modul	Pressure angle		O.R. 36 Mounting holes	equiv.							
Diametral pitch 1	Engriffswinkel		A.R. Befestigungsboreungen	gl. Abst.							
Nbre de dents 100	Troncature		R.E. 36 Trous de fixation M16	equiv.							
Nr. of teeth - Zahnzahl	Troncature - Kopfkurzung	G	I.R. 36 Mounting holes	equiv.	Des.	Date.	Ver.	Date.	Ech.	Indice B	Luoyang JCB Bearing Technology Co., Ltd Add: No.3 Lianmeng road, Luoyang, Henan, China Postal: 471003 Phone: +86-379-68611678 Fax: +86-379-68611679 E-mail: sales@jcb-bearing.com
Diamètre primitif 800			I.R. Befestigungsboreungen	gl. Abst.							
Pitch diameter - Teilkreissdurchmesser			R.E. 3 Trous de graisseurs M 10 x 1.00	equiv.							
Report 2 m d			O.R. Grease holes	equiv.							
Add. mod. 2 m d - Profilverschiebung 2 m d		B	A.R. Schmierboreungen	gl. Abst.	Des.	Date.	Ver.	Date.	Ech.	Indice B	Luoyang JCB Bearing Technology Co., Ltd Add: No.3 Lianmeng road, Luoyang, Henan, China Postal: 471003 Phone: +86-379-68611678 Fax: +86-379-68611679 E-mail: sales@jcb-bearing.com
Cote sur 12 dents 283.440			R.E. 3 Trous de graisseurs	equiv.							
Measurement on teeth 283.200			I.R. Grease holes	equiv.							
Zahnmessweite bei Zahnen			A.R. Schmierboreungen	gl. Abst.							
Faux rond au diamètre primitif - Run out on P.D. Rundlauffehler am Teilkreis		R	Position approximative du bouchon et du raccord de trempée		Des.	Date.	Ver.	Date.	Ech.	Indice B	Luoyang JCB Bearing Technology Co., Ltd Add: No.3 Lianmeng road, Luoyang, Henan, China Postal: 471003 Phone: +86-379-68611678 Fax: +86-379-68611679 E-mail: sales@jcb-bearing.com
Non trempée 0.53	Hardened 0.68		Filler plug and hardening connection of raceway								
Ungelärtet	Gelärtet		ca Stopfen - und heerteschlupf - position								