



A

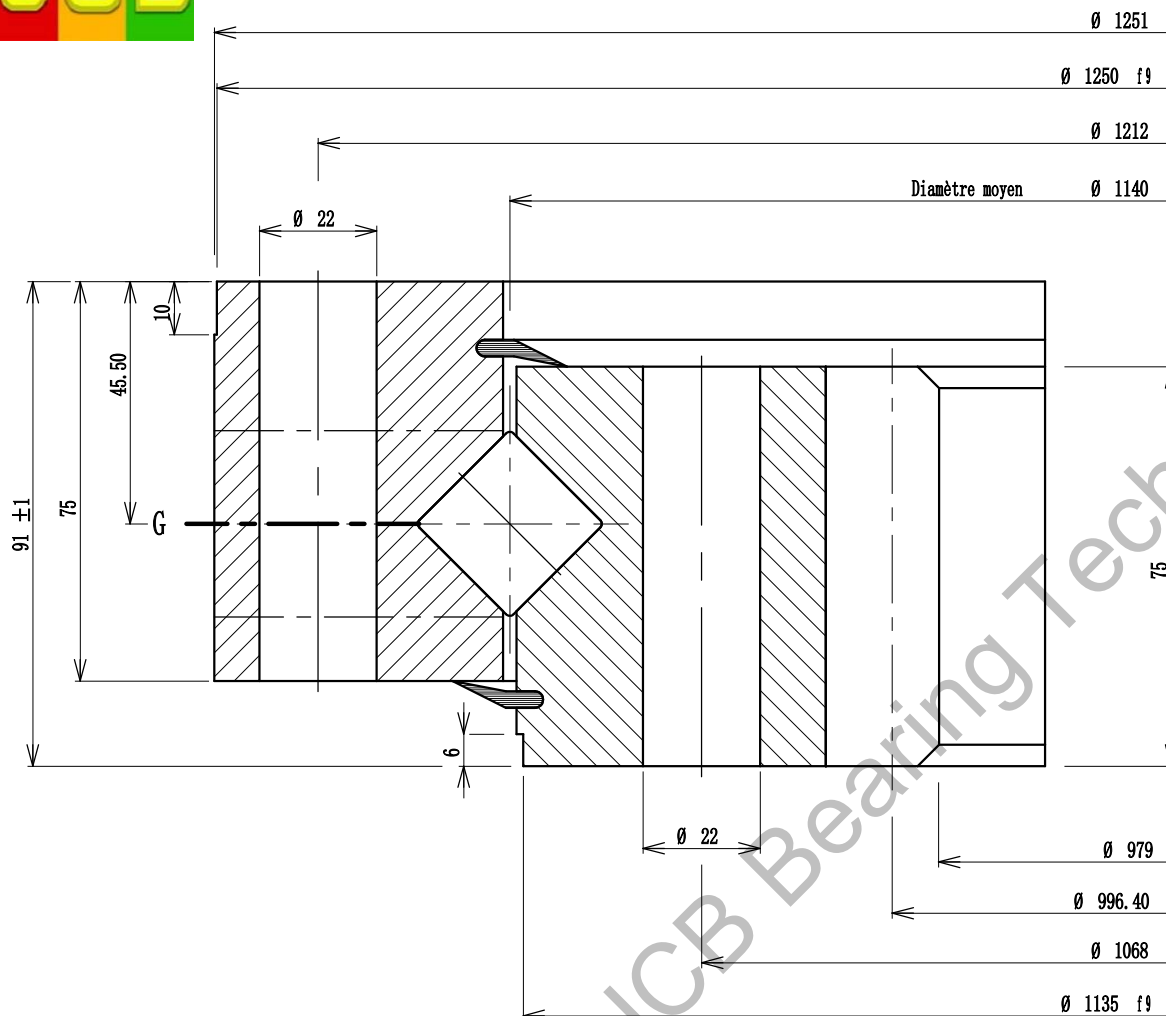

Implantation suivant A
Implantation according to A
Ansicht nach A

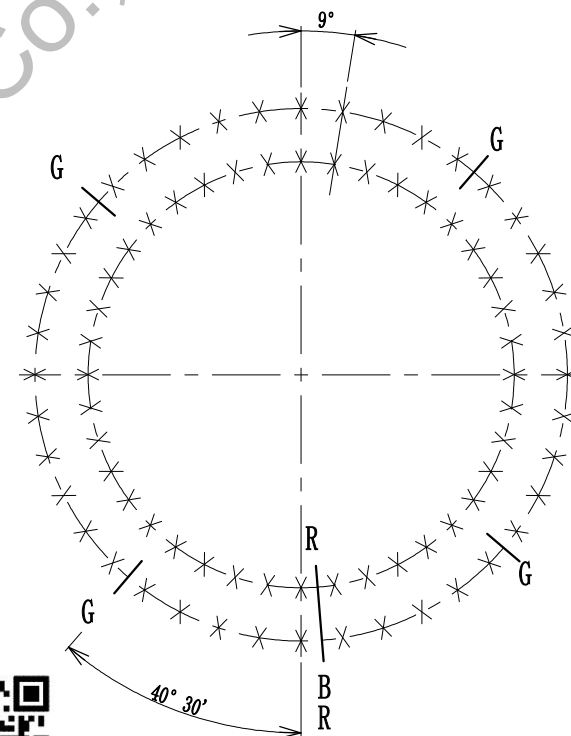

Denture - Gear - Verzahnung	
Droite	
Module 10	Angle de pression 20°
Module - Modul	Pressure angle
Diametral pitch 99	Engriffswinkel 1.30
Nbr. de dents	Troncature
Nr. of teeth - Zahnezahl	Troncature - Kopfkürzung
Diamètre primitif 990	
Pitch diameter - Teilkreisdurchmesser	
Report 2 m d 6.400	
Add. mod. 2 m d - Profilverschiebung 2 m d	
Cote sur 12 dents 356.330	
Measurement on teeth	
Zahnessweite bei Zähnen 356.030	
Faux rond au diamètre primitif - Run out on P.D. Rundlauffehler am Teilkreis	
Non trempée 0.51	Trempée 0.66
Ungehartet	Gehartet

Tolérances générales suivant IT-ETR-061	
General tolerances according to IT-ETR-061	
Allgemeine toleranzen nach IT-ETR-061	
X	
(B.E. 40	Trous de fixation Ø 22
(O.R. 40	Mounting holes
(A.R. 40	Befestigungsboreungen
(B.I. 40	Trous de fixation Ø 22
(I.R. 40	Mounting holes
(J.R. 40	Befestigungsboreungen
(B.E. 4	Trous de graisseurs M 10 x 1.00
(O.R. 4	Grease holes
(A.R. 4	Schmierboeren
(B.I. 4	Trous de graisseurs
(I.R. 4	Grease holes
(J.R. 4	Schmierboeren

B	Position approximative du bouchon et du raccord de trempé
R	Filler plug and hardening connection of raceway
	ca Stopfen - und heerteschlupf - position

Des.	
Date.	
Ver.	
Date.	
Ech.	

Masse estimée 239 kg	
Gewicht ca lbs	
Estimated weight	

N° 07-1140-13	
Indice A	
Luoyang JCB Bearing Technology Co., Ltd	
Add: No.3 Lianmeng road, Luoyang, Henan, China.	
Postal: 471003	
Phone: +86-379-68611678	
Fax: +86-379-68611679	
E-mail: sales@jcb-bearing.com	