
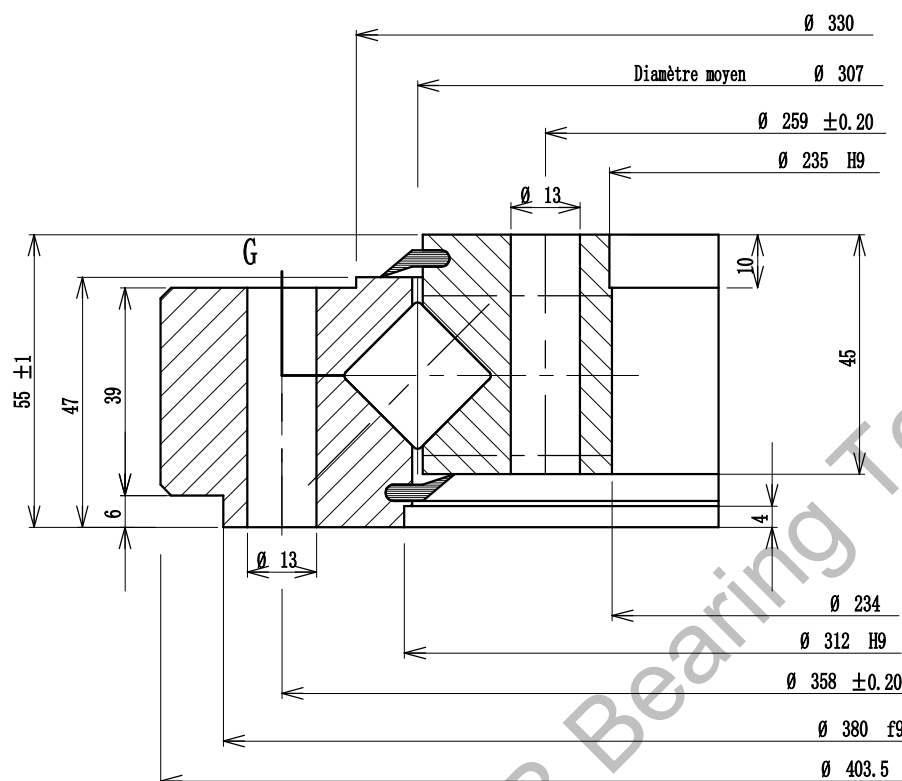




Denture - Gear - Verzahnung		Tolérances générales suivant IT-ETN-061 General tolerances according to IT-ETN-061 Allgemeine toleranzen nach IT-ETN-061						Masse estimée — % — kg Gewicht ca — — lbs Estimated weight		N° 08-0307-00	
Module — Angle de pression — Module - Modul — Pressure angle — Diametral pitch — Eingriffswinkel — Nr. of teeth - Zahnezahl — Truncature — Truncature - Kopfkürzung —		X B.E. 24 Trous de fixation Ø 13 equid. O.R. Mounting holes equis. A.R. Befestigungsboreungen gl. Abst. B.I. 28-1 Trous de fixation Ø 13 equid. I.R. Mounting holes equis. I.R. Befestigungsboreungen gl. Abst. B.E. 2 Trous de graisseurs M 10 x 1.00 equid. O.R. Grease holes Lames Ø 200prof.4 equis. A.R. Schmierboreungen gl. Abst. B.I. Trous de graisseurs equid. I.R. Grease holes equis. I.R. Schmierboreungen gl. Abst.				Des. — Date. — Ver. — Date. — Ech. —				Indice C	
Diamètre primitif — Pitch diameter - Teilkreisdurchmesser — Dport 2 m d — Add. mod. 2 m d - Profilverschöbung 2 m d — Cote sur dents — Measurement on teeth — Zahnezmesste bei Zahnen — Paux rond au diamètre primitif - Run out on P.D. Rundlauffehler am Teilkreis		G								Luoyang JCB Bearing Technology Co., Ltd Add: No.3 Lianmeng road, Luoyang, Henan, China Postal: 471003 Phone: +86-379-68611678 Fax: +86-379-68611679 E-mail: sales@jcb-bearing.com	
Non trempée — No hardened — Ungelhartet —		B R		Position approximative du bouchon et du raccord de trempée Filler plug and hardening connection of raceway ca Stopfen - und heerteschlupf - position							