
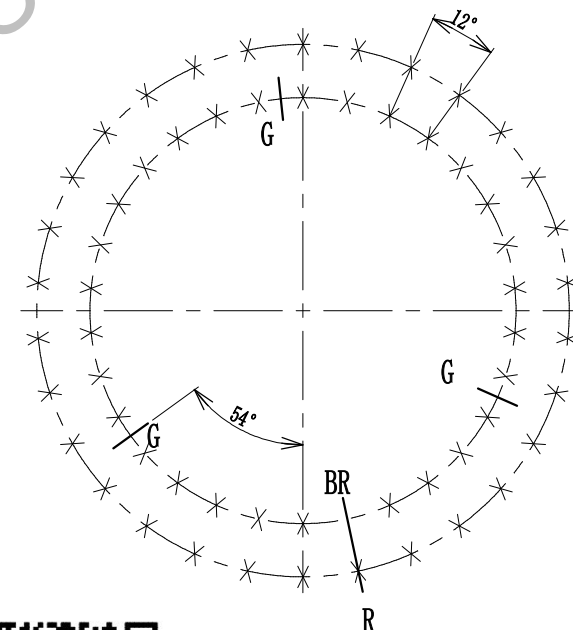





Denture - Gear - Verzahnung		Tolérances générales suivant IT-ETX-061 General tolerances according to IT-ETX-061 Allgemeine toleranzen nach IT-ETX-061						Masse estimée Gewicht ca Estimated weight	54 kg lbs	N° 08-0400-00
Module _____ Angle de pression _____ Module - Modul _____ Pressure angle _____ Eingriffswinkel _____ Diametral pitch _____ Troncature _____ Nr. of teeth - Zahnesahl _____ Truncature - Kopfkürzung _____ Diamètre primitif _____ Pitch diameter - Teilkreissdurchmesser _____ Dp/2 = m d _____ Add. mod. 2 m d - Profilverschiebung 2 m d _____ Cote sur _____ dents _____ Measurement on teeth _____ Zahnesweite bei Zähnen _____ Paux rond sur diamètre primitif - Run out on P.D. Rundlauffehler am Teilkreis _____		X G B.E. 30 Trous de fixation Ø 18 equid. O.R. Mounting holes equis. A.R. Befestigungsborungen gl. Abst. B.I. 30-1 Trous de fixation Ø 18 equid. I.R. Mounting holes equis. I.R. Befestigungsborungen gl. Abst. B.E. Trous de grasseurs equid. O.R. Grease holes equis. A.R. Schmierborungen gl. Abst. B.I. 3 Trous de grasseurs M 10 x 1.00 equid. I.R. Grease holes equis. I.R. Schmierborungen gl. Abst.				Des. _____ Date. _____ Ver. _____ Date. _____ Ech. _____				Indice A
Non trempée No hardened Ungehartet		B Position approximative du bouchon et du raccord de trempé R Filler plug and hardening connection of raceway ca Stopfen - und heerteschlupf - position								Luoyang JCB Bearing Technology Co., Ltd Add: No.3 Lianmeng road, Luoyang, Henan, China Postal: 471003 Phone: +86-379-68611678 Fax: +86-379-68611679 E-mail: sales@jcb-bearing.com