



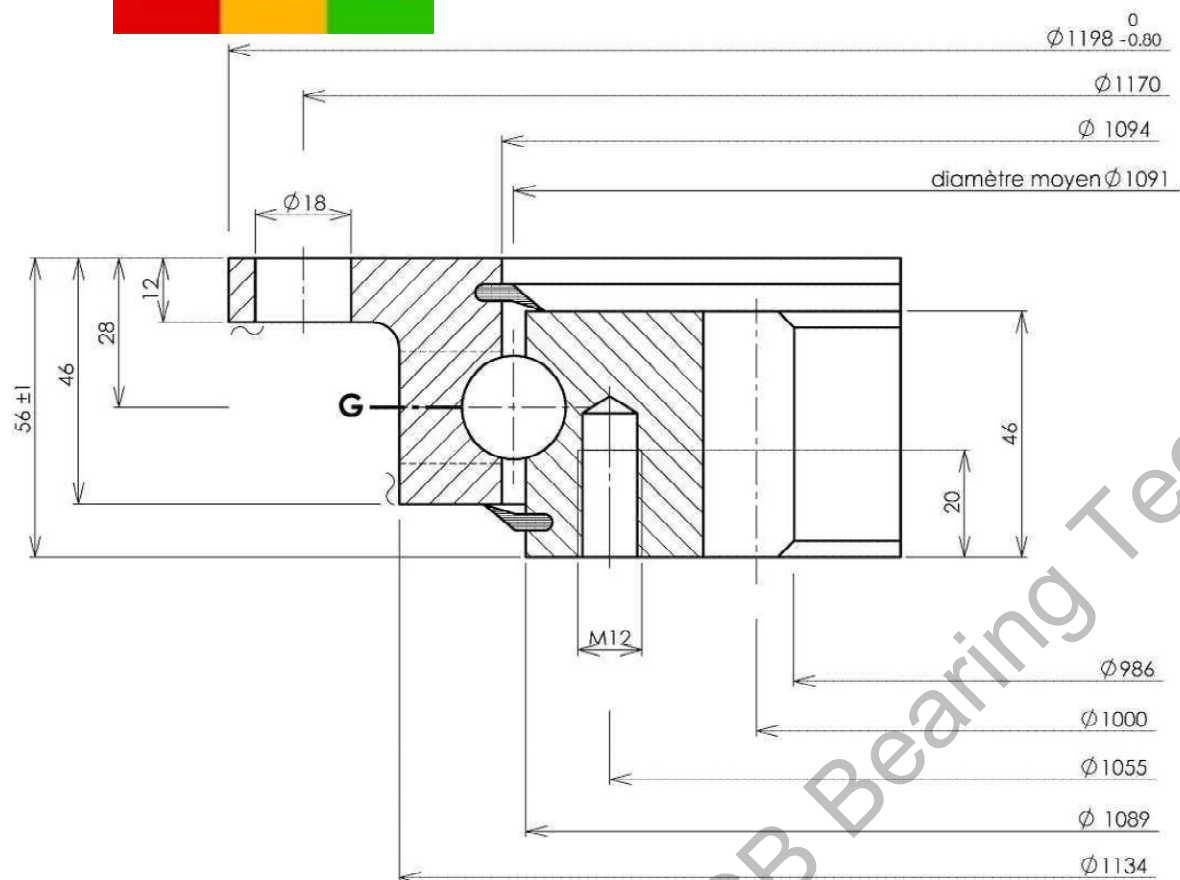

Implantation suivant A
Implantation according to A
Ansicht nach A

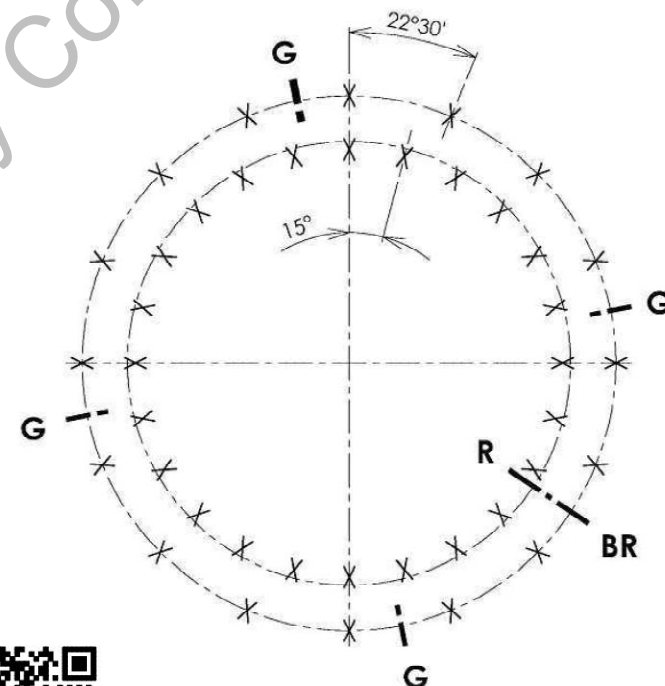

Denture - Gear - Verzahnung Droite		Tolérances générales suivant IT-ETR-061 General tolerances according to IT-ETR-061 Allgemeine toleranzen nach IT-ETR-061		Masse estimée 87 kg Gewicht ca 87 lbs Estimated weight		N° 22-1091-01	
Module 8 Module - Modul Diametral pitch	Angle de pression 20° Pressure angle Eingriffswinkel	16	Trous de fixation Mounting holes Befestigungsbohrungen	$\varnothing 18$		Indice C	
Nbr de dents 125 Nr. of teeth - Zahnzahl Troncature - Koptkurzung	1	24	Trous de fixation Mounting holes Befestigungsbohrungen	M12			
Diamètre primitif 1000 Pitch diameter - Teilkreissdurchmesser		4	Trous de graisseurs Grease holes Schmierbohrungen	M 8 x 1.00		Company Name : Luoyang JCB Bearing Technology Co., Ltd	
Déport 26 m Add. mod. 26 m - Profilverschiebung 26 m			Trous de graisseurs Grease holes Schmierbohrungen				
Cote sur 15 dents 357.120 Measurement on teeth Zahnmessweite bei Zähnen						Contact information Company Address : No.3 Lianmeng road, Luoyang, Henan, China. Postal code : 471003 Phone : 86-379-68611678 Fax : 86-379-68611679 Men: jcb-bearing@hotmail.com Skype: jcb-bearing E-mail: sales@jcb-bearing.com Reserved E-mail: jcb-bearing@gmail.com Website: www.jcb-bearing.com	
Faux rond au diamètre primitif - Run out on P.D. Rundlauffehler am Teilkreis							
Non trempée No hardened Ungehärtet	Trempée Hardened Gehärtet	B	Position approximative du bouchon et du raccord de trempage Filler plug and hardening connection of raceway ca Stopfen und heerteschlupf - position			Des. _____ Date. _____ Ver. _____ Date. _____ Ech. _____	
		R					