
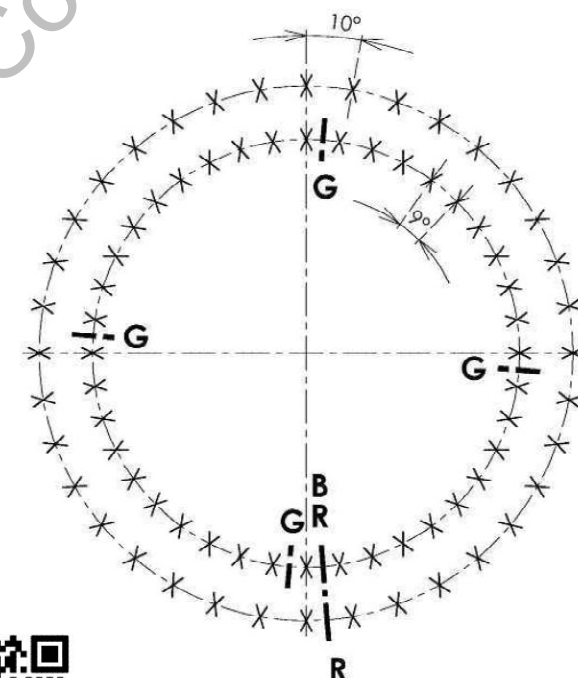


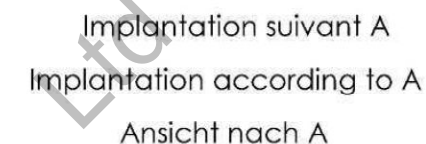

Denture - Gear - Verzahnung		Tolérances générales suivant IT-ET-061 General tolerances according to IT-ET-061 Allgemeine toleranzen nach IT-ET-061						Masse estimée 61 kg Gewicht ca _____ kg Estimated weight _____ lbs		N° 31-0741-01	
 Droite Module 6 Angle de pression 20° Pressure angle Eingriffswinkel Diametral pitch Nbre de dents 138 Nr. of teeth - Zahnzahl Troncature - Koptkurzung Diameter primitif 828 Pitch diameter - Teilkreisdurchmesser Déport 28 m Add. mod. 28 m - Profilververschiebung 28 m Cote sur 16 dents 286.020 Measurement on teeth Zahnmessweite bei Zähnen 285.840		 X B.E. 36 Trous de fixation M12 equid. O.R. Mounting holes A.R. Befestigungsbohrungen B.I. 40 Trous de fixation Ø 14 equid. I.R. Mounting holes I.R. Befestigungsbohrungen B.E. Trous de graisers gl. Abst. O.R. Grease holes A.R. Schmierbohrungen B.I. 4 Trous de graisers M 8 x 1.00 equid. I.R. Grease holes I.R. Schmierbohrungen gl. Abst.		 G B.E. 4 Trous de graisers M 8 x 1.00 equid. O.R. Grease holes A.R. Schmierbohrungen gl. Abst.		 A B.E. 4 Trous de graisers M 8 x 1.00 equid. O.R. Grease holes A.R. Schmierbohrungen gl. Abst.		Cette couronne brevetée DUO-ROL-X est notre propriété. Ce plan ne peut être communiqué ni remis à des tiers sans l'autorisation écrite de ROLLIX-DEFONTAINE. Information confidential proprietary of ROLLIX-DEFONTAINE. Any person excepted is required to accept same information in confidence and agrees to make no disclosures or use thereof except as authorized by ROLLIX-DEFONTAINE.		 Indice A Company Name : Luoyang JCB Bearing Technology Co., Ltd. Contact information Company Address : No. 3 Lianming road, Luoyang, Henan, China. Postal code : 471003 Phone : 86-379-68611678 Fax : 86-379-68611679 Msn: jcb-bearing@hotmail.com Skype: jcb-bearing E-mail: sales@jcb-bearing.com Reserved E-mail: jcb-bearing@gmail.com Website: www.jcb-bearing.com	
Faux rond au diamètre primitif - Run out on P.D. Rundlauffehler am Teilkreis		 B Position approximative du bouchon et du raccord de trempée Filler plug and hardening connection of raceway ca Stapfen - und heerteschlupf - position		 A Ind		Diese patentierte drehverbindung DUO-ROL-X ist unser Eigentum. Diese zeichnung darf nicht ohne schriftliche genehmigung von ROLLIX-DEFONTAINE weitergegeben werden.					
Non trempée Unhardened Ugehärtet		 R Trempée Hardened Gehärtet									