



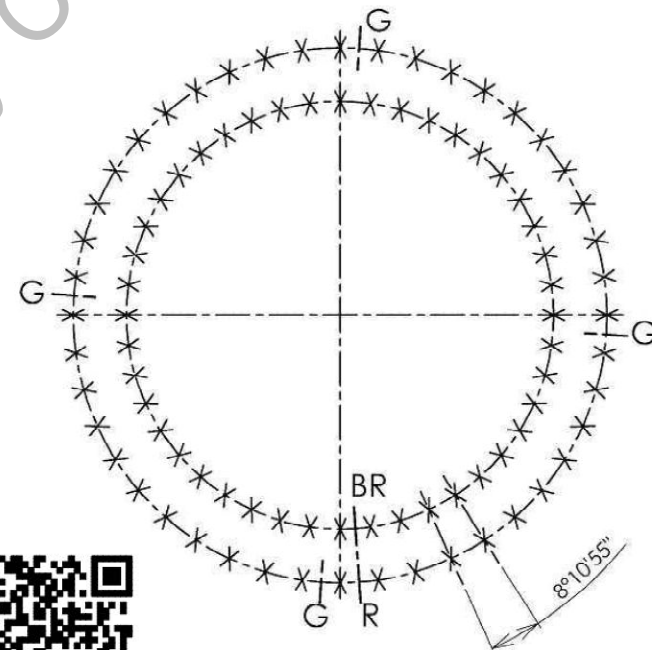

Implantation suivant A
Implantation according to A
Ansicht nach A

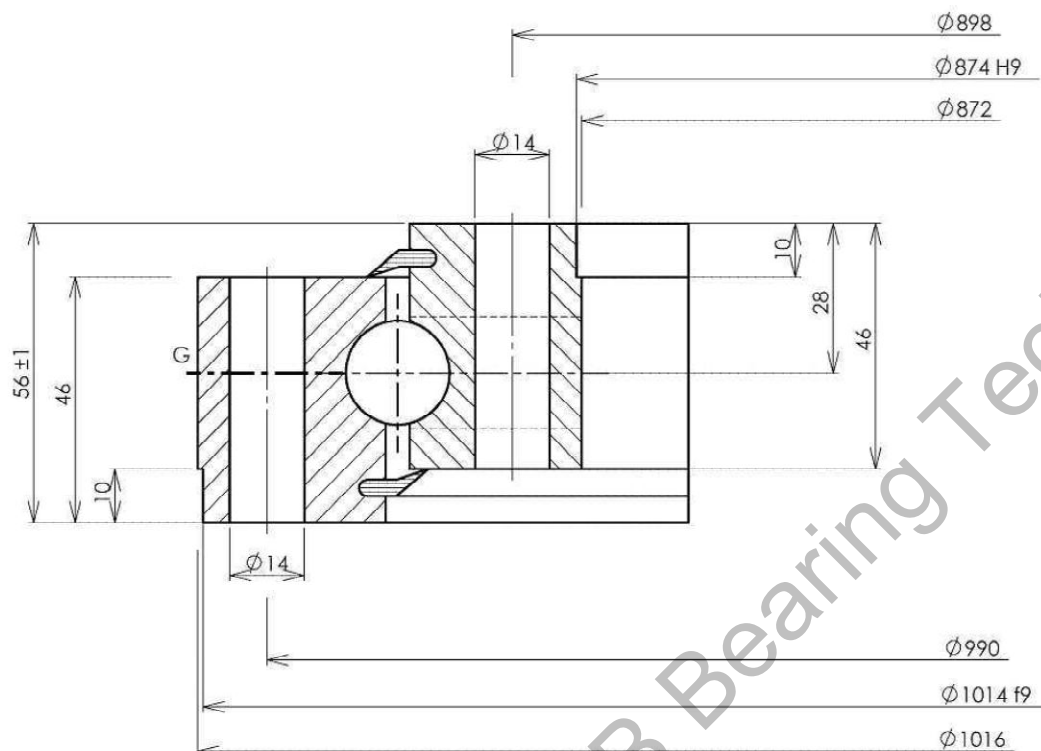

Denture - Gear - Verzahnung		Tolérances générales suivant IT-ET-061 et ISO 8015 General tolerances according to IT-ET-061 and ISO 8015 Allgemeine Toleranzen nach IT-ET-061 und ISO 8015						Masse estimée <u>67</u> kg Gewicht ca <u>67</u> lbs Estimated weight	N° 33-0941-01			
Module <u> </u> Module - Modul <u> </u> Diametral pitch <u> </u>	Angle de pression <u> </u> Pressure angle <u> </u> Eingriffswinkel <u> </u>	X	B.E. <u>44</u> O.R. <u> </u> A.R. <u> </u>	Trous de fixation <u>Ø 14</u> Mounting holes <u> </u> Befestigungsbohrungen <u> </u>	equid. <u> </u> equis. <u> </u> gl. Abst. <u> </u>	G	B.I. <u>44</u> I.R. <u> </u> J.R. <u> </u>	Trous de fixation <u>Ø 14</u> Mounting holes <u> </u> Befestigungsbohrungen <u> </u>	equid. <u> </u> equis. <u> </u> gl. Abst. <u> </u>	Des. <u> </u>	Cette couronne brevetée DUO-ROL-X est notre propriété. Ce plan ne peut être communiqué ni rétransmis à des tiers sans l'autorisation écrite de ROLLIX-DEFONTAINE. Information confidential proprietary of ROLLIX-DEFONTAINE. Any person excepted is required to accept some information in confidence and agrees to make no disclosures or use thereof except as authorized by ROLLIX-DEFONTAINE. Diese patentierte drehverbindung DUO-ROL-X ist unser Eigentum. Diese Zeichnung darf nicht ohne schriftliche Genehmigung von ROLLIX-DEFONTAINE weitergegeben werden.	Indice <u>A</u>
Nbr. de dents <u> </u> Nr. of teeth - Zahnzahl <u> </u> Truncature - Koptkurzung <u> </u>			B.E. <u>4</u> O.R. <u> </u> A.R. <u> </u>	Trous de graisseurs <u>M 8 x 1.00</u> Grease holes <u> </u> Schmierbohrungen <u> </u>	equid. <u> </u> equis. <u> </u> gl. Abst. <u> </u>		B.I. <u> </u> I.R. <u> </u> J.R. <u> </u>	Trous de graisseurs <u> </u> Grease holes <u> </u> Schmierbohrungen <u> </u>	equid. <u> </u> equis. <u> </u> gl. Abst. <u> </u>	Date. <u> </u>	Ver. <u> </u>	Company Name : Luoyang JCB Bearing Technology Co., Ltd.
Diamètre primitif <u> </u> Pitch diameter - Teilkreissdurchmesser <u> </u>			B.E. <u> </u> O.R. <u> </u> A.R. <u> </u>				B.I. <u> </u> I.R. <u> </u> J.R. <u> </u>					Contact information Company Address : No 3 Lianmeng road, Luoyang, Henan, China. Postal code : 471003 Phone : 86-379-68611678 Fax : 86-379-68611679 Msn: jcb-bearing@hotmail.com Skype: jcb-bearing E-mail: sales@jcb-bearing.com Reserved E-mail: jcb-bearing@gmail.com Website: www.jcb-bearing.com
Déport 26m <u> </u> Add. mod. 26m <u> </u> - Profilverschiebung 26m <u> </u> Cote sur <u> </u> dents <u> </u> Measurement on teeth <u> </u> Zahnmessweite bei Zähnen <u> </u>			B	Position approximative du bouchon et du raccord de trempé Filler plug and hardening connection of raceway ca Stopfen - und heerteschlupf - position <u> </u>	A							
Non trempée <u> </u> No hardened <u> </u> Ungehärtet <u> </u>	Trempée <u> </u> Hardened <u> </u> Gehärtet <u> </u>		R									
Faux rond au diamètre primitif - Run out on P.D. Rundlauffehler am Teilkreis <u> </u>												