

Four point contact slewing bearings
without gear

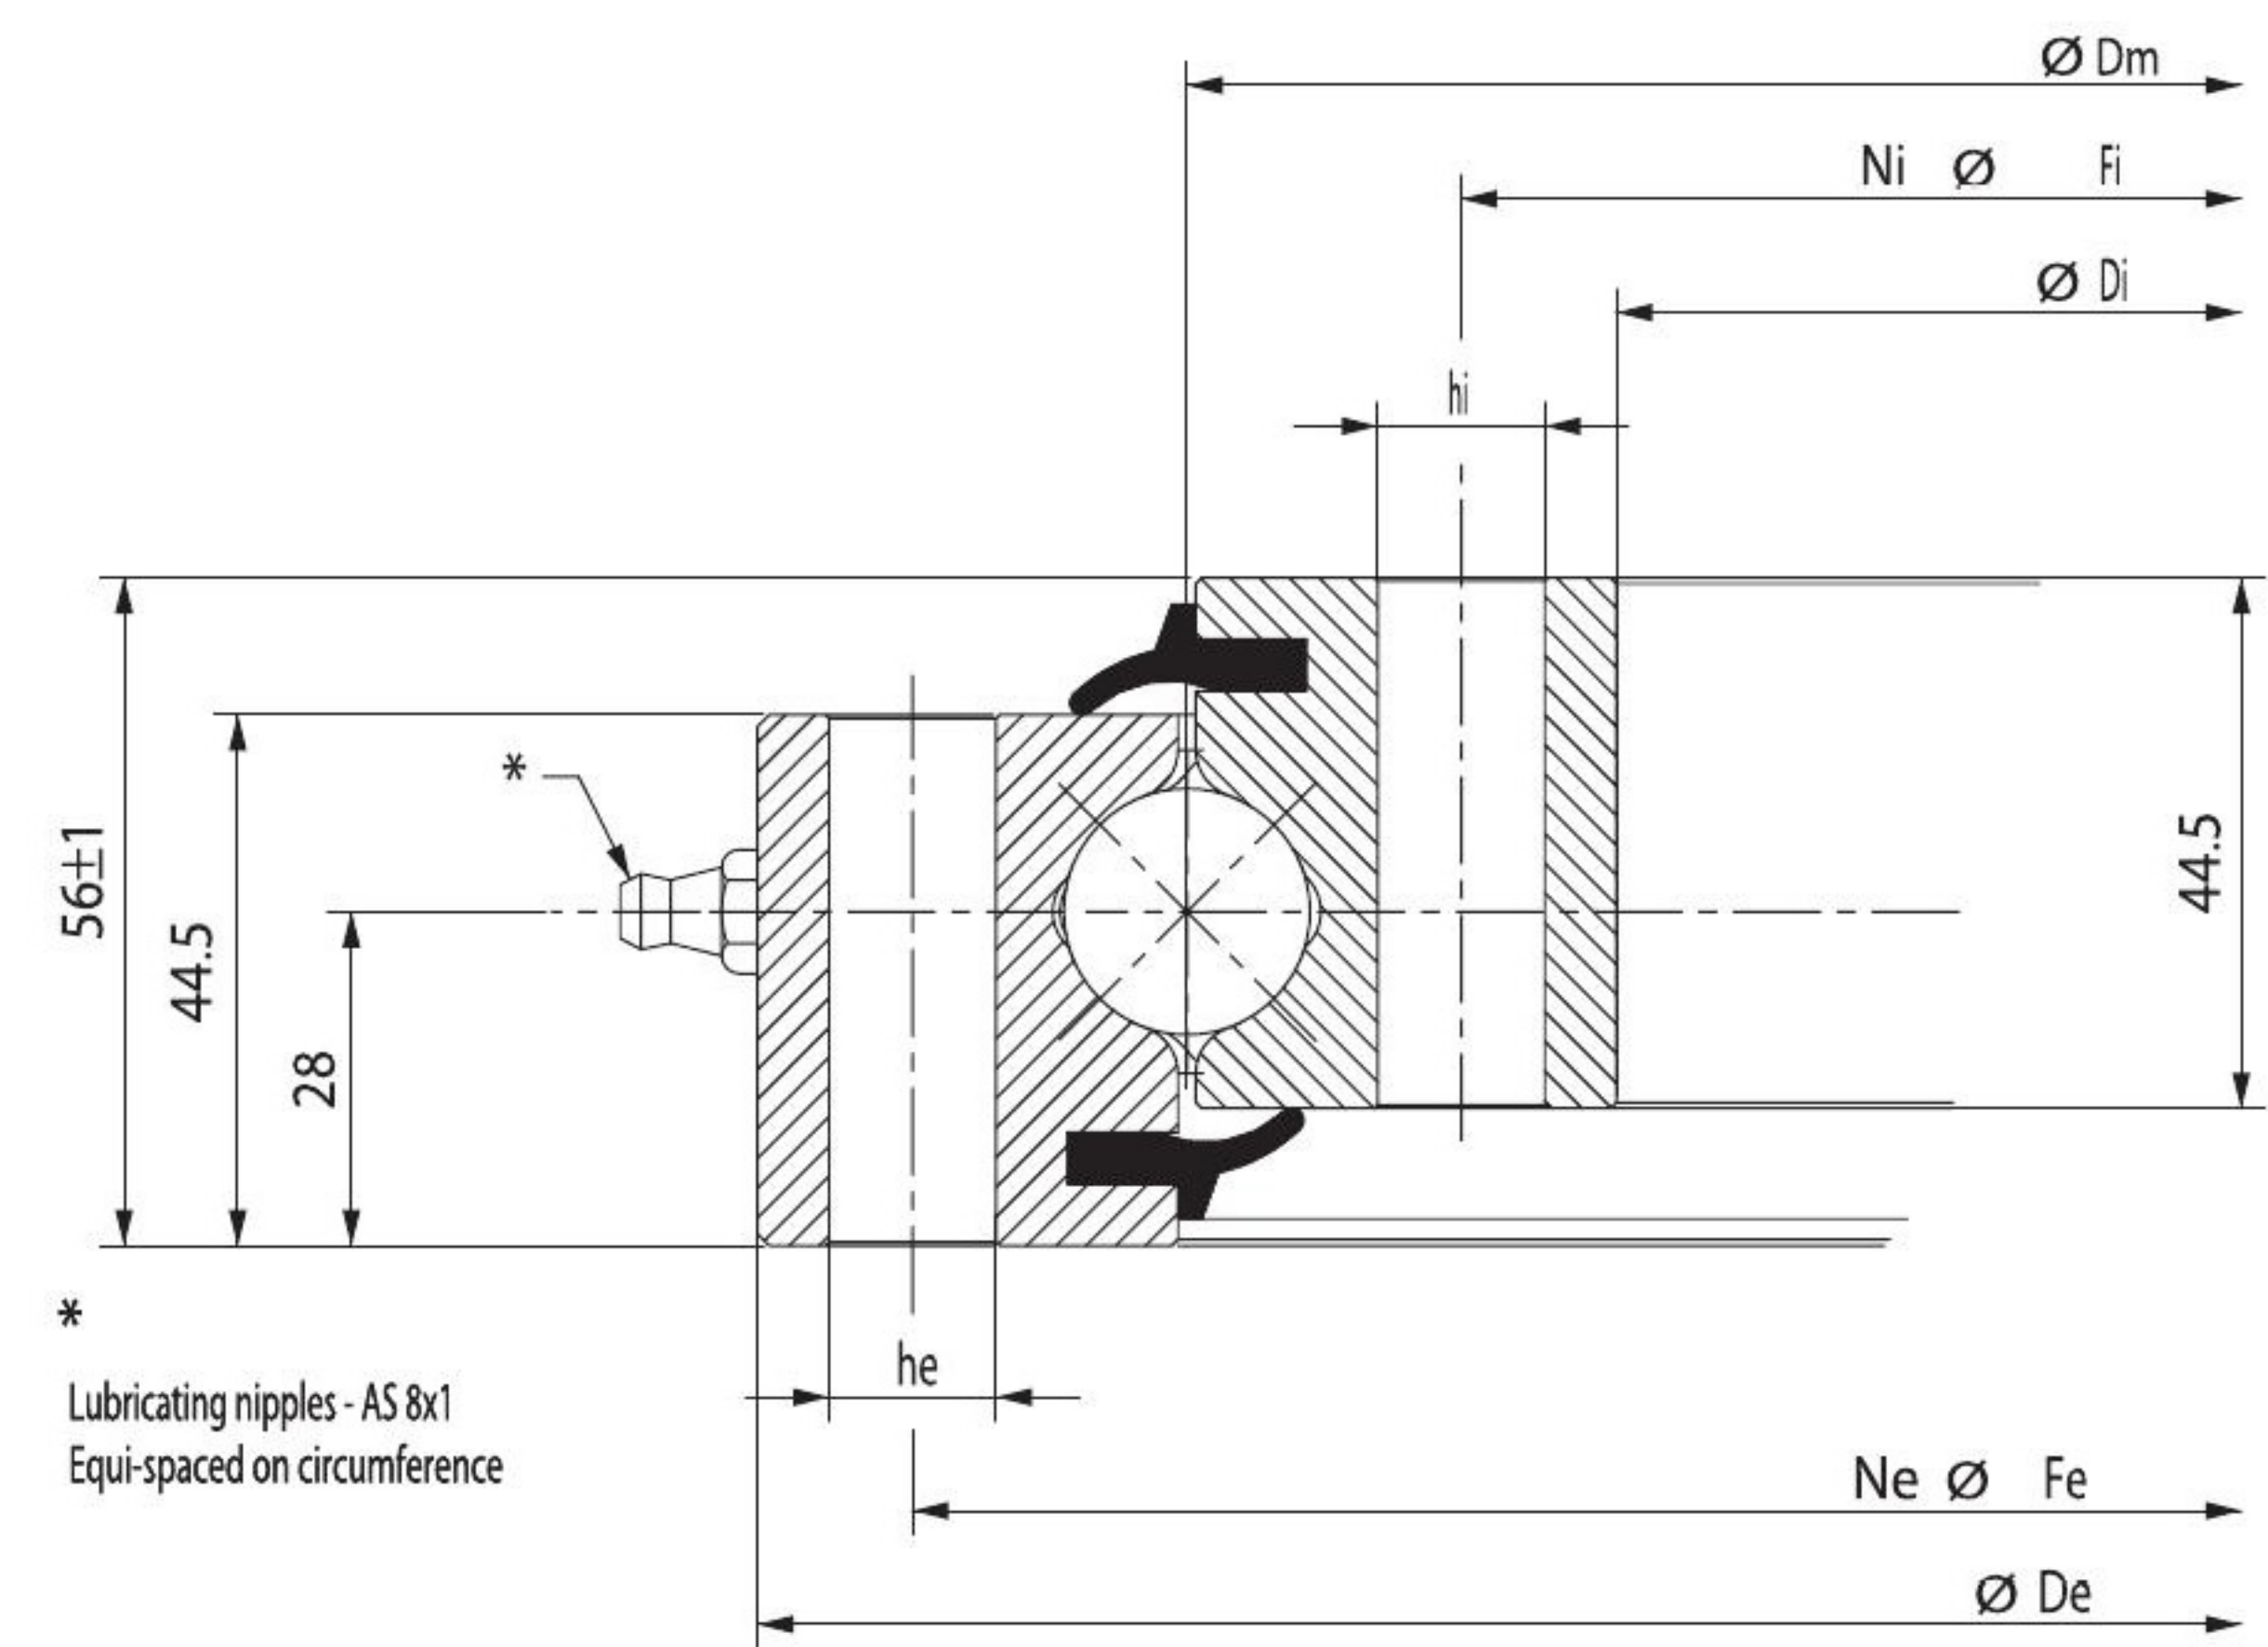


Figure E



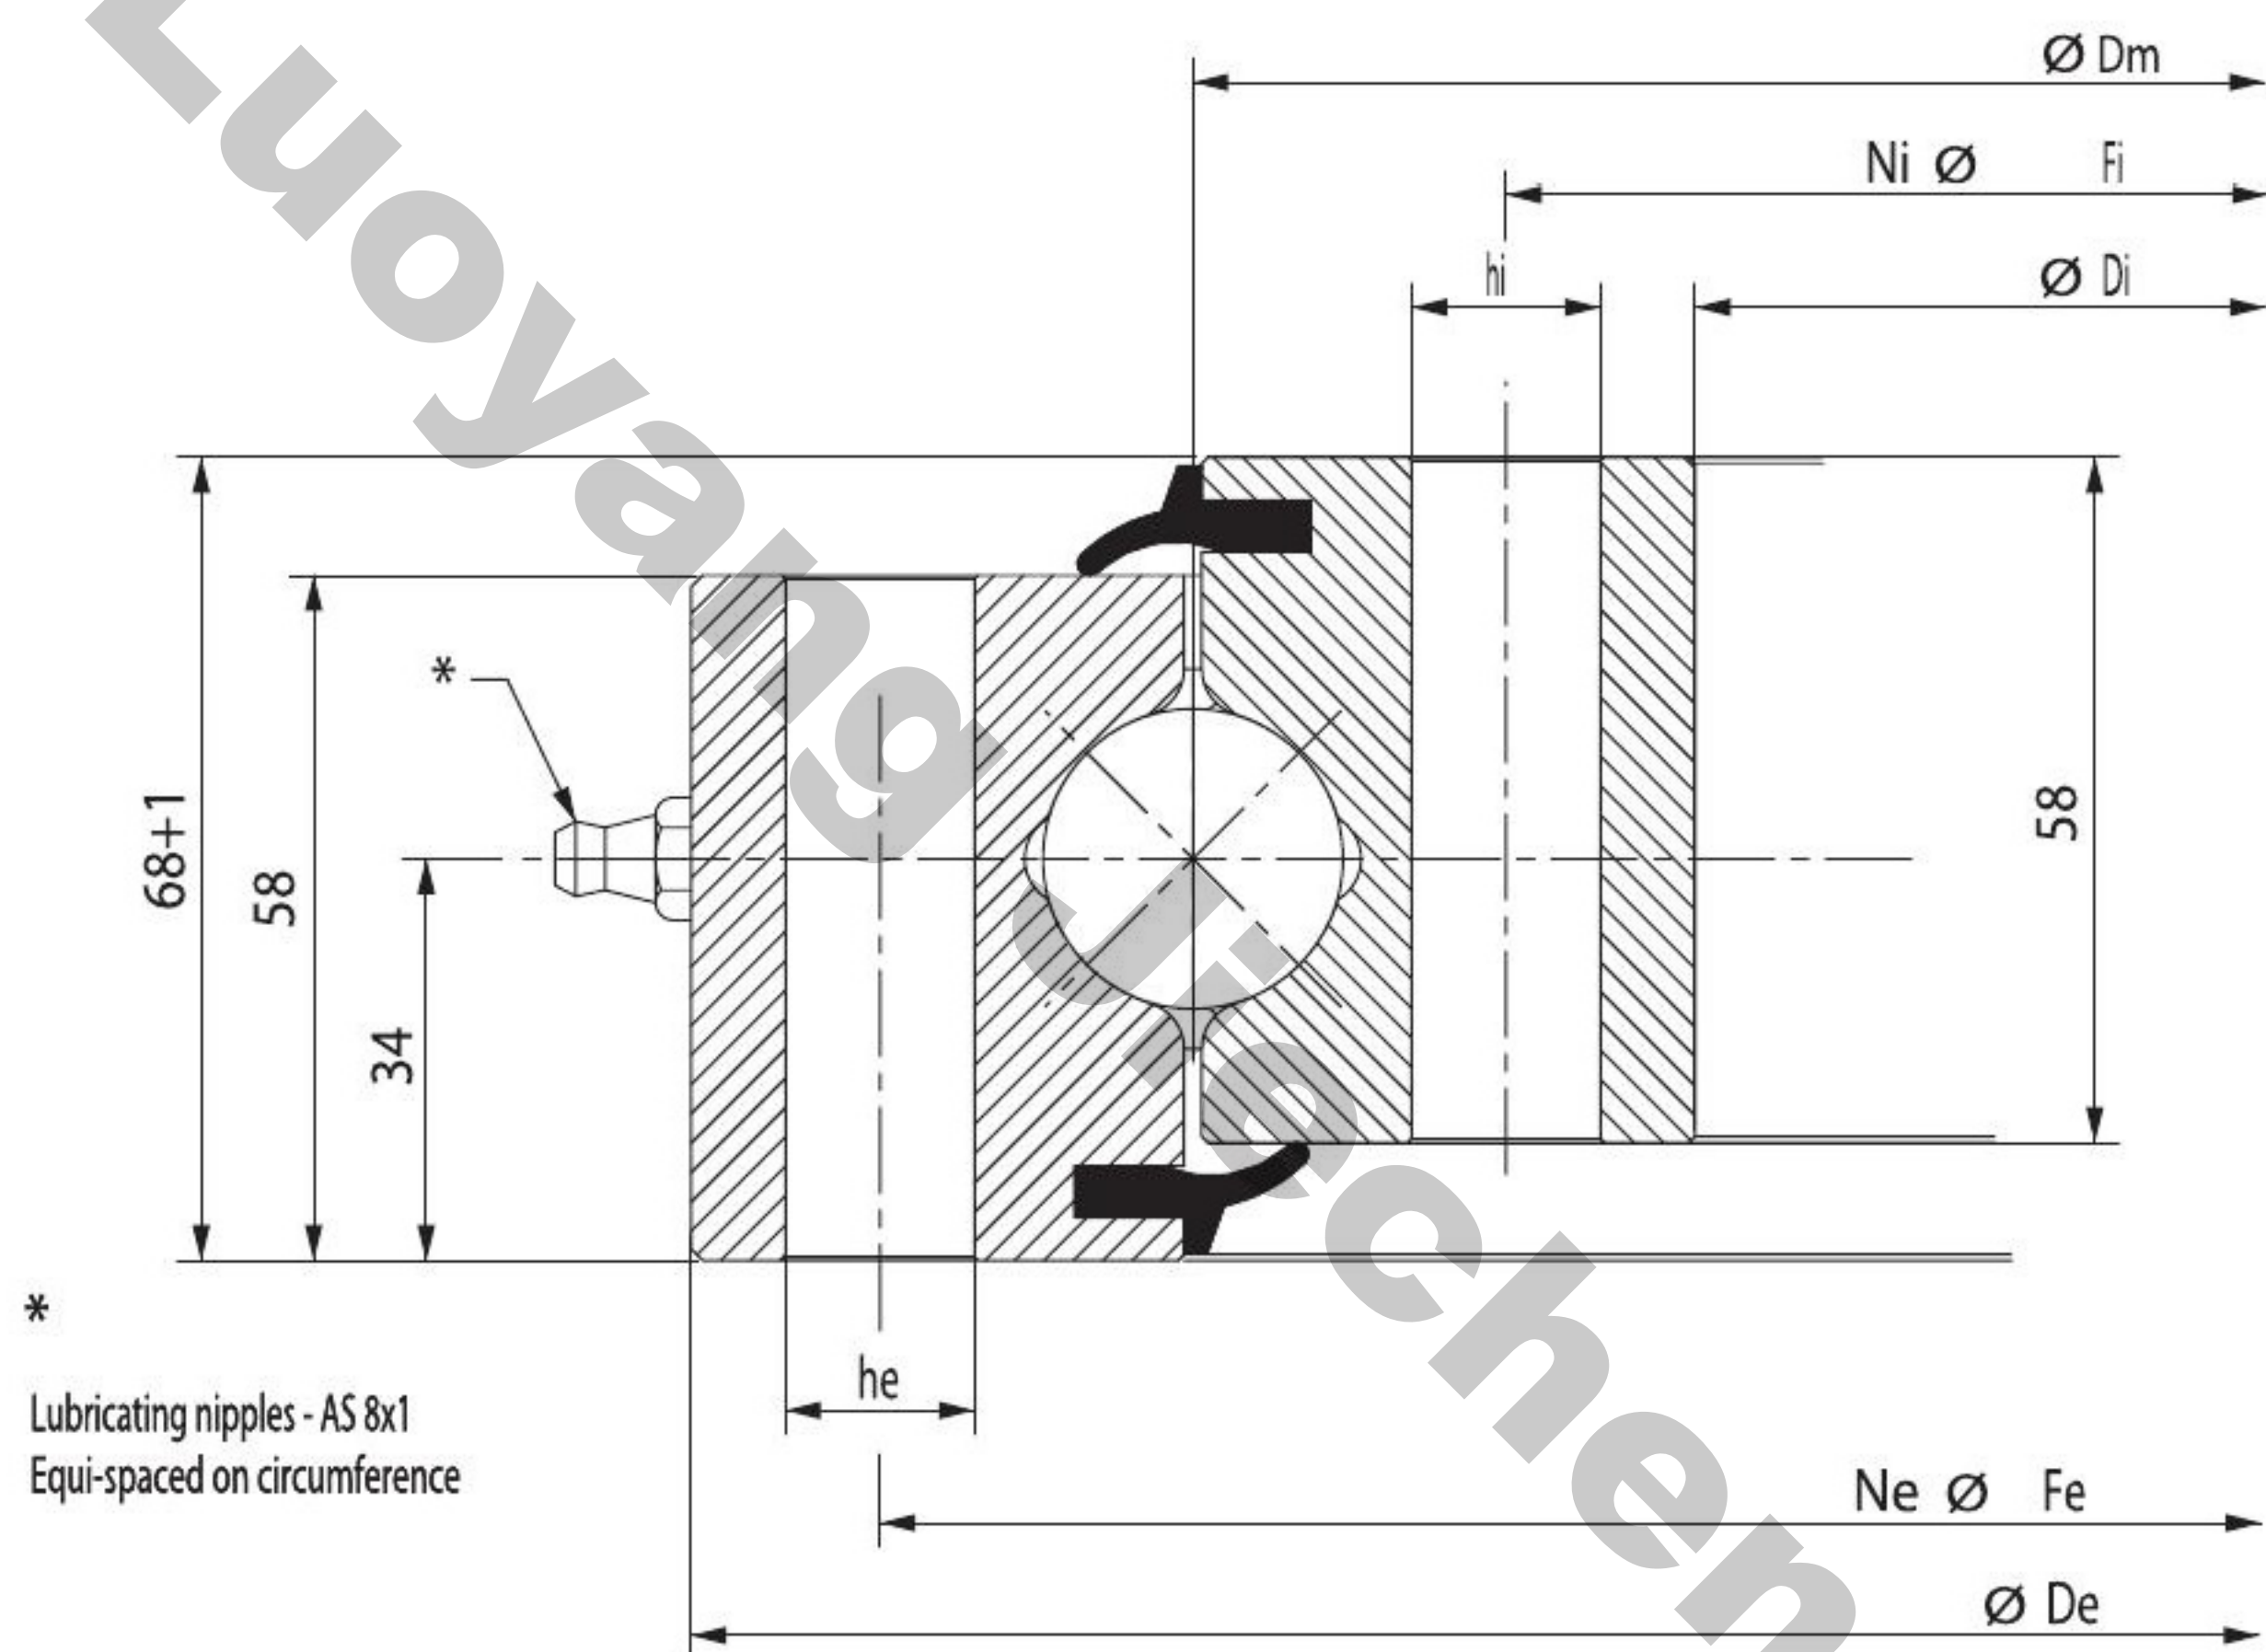


Figure F

Static limiting load curves for raceway ——— 1r to 14r
Static limiting load curves for bolting - - - - - 1b to 14b

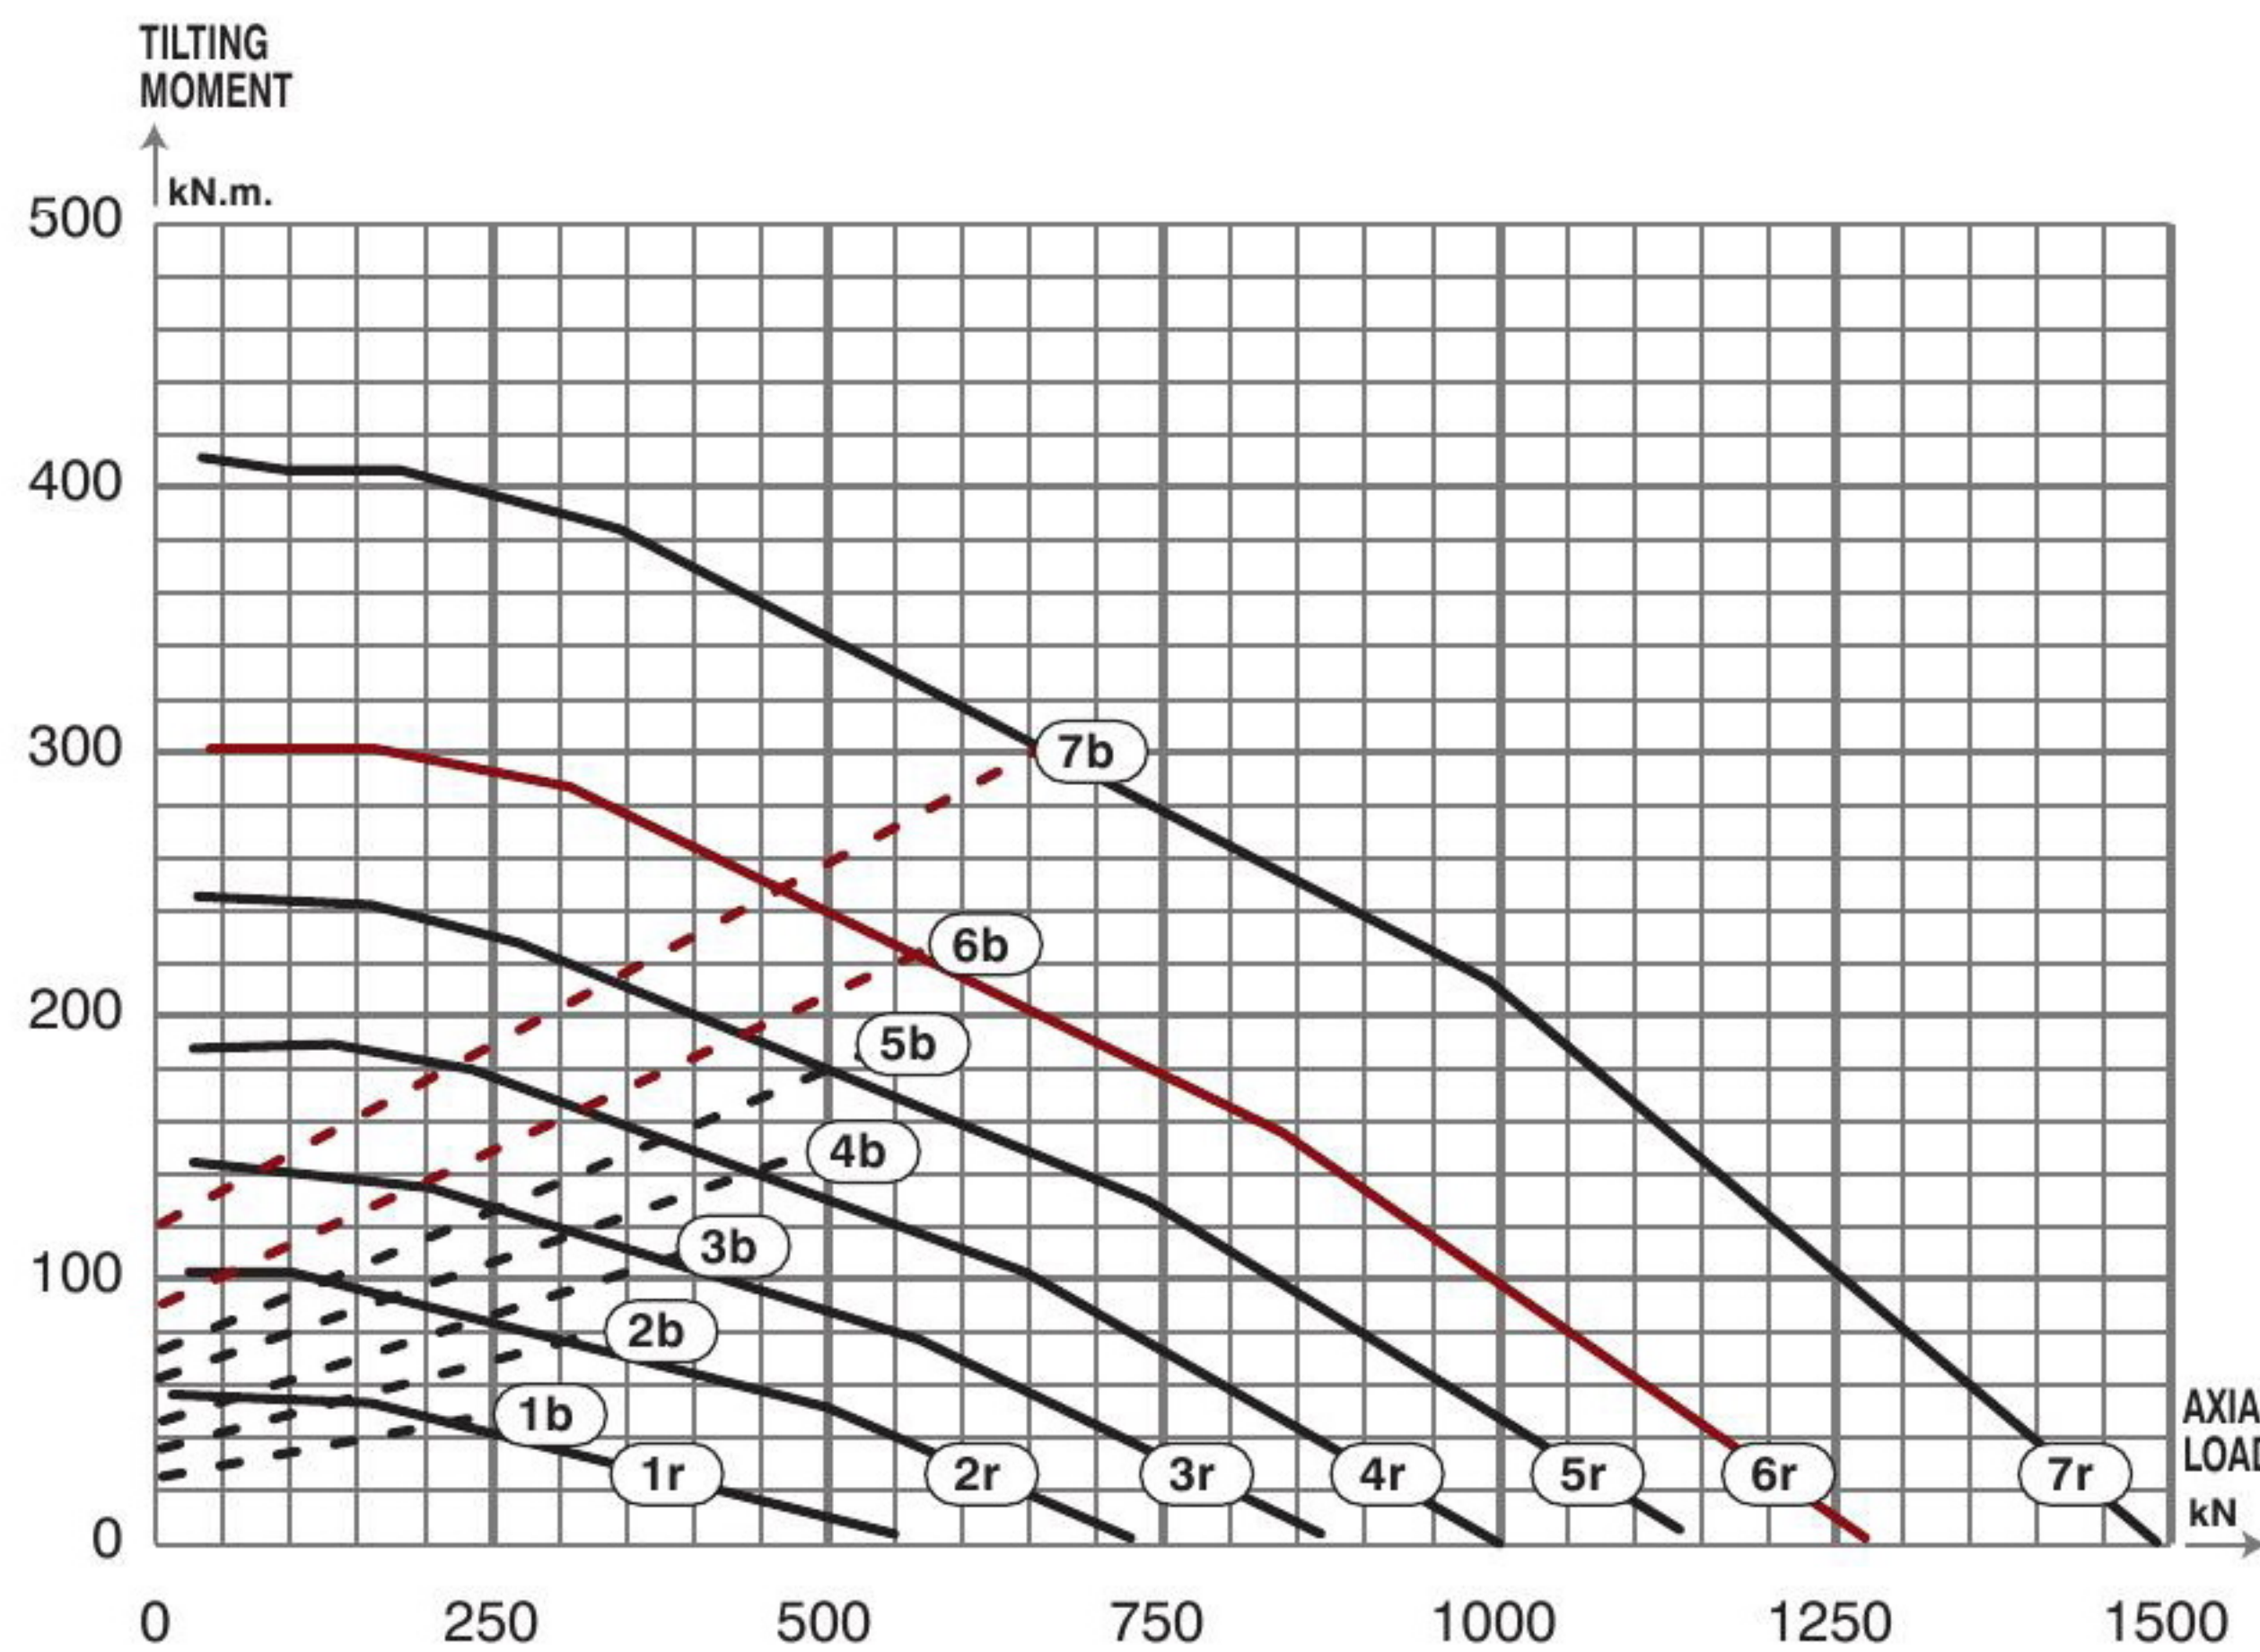

Dm 414 to 1094 mm

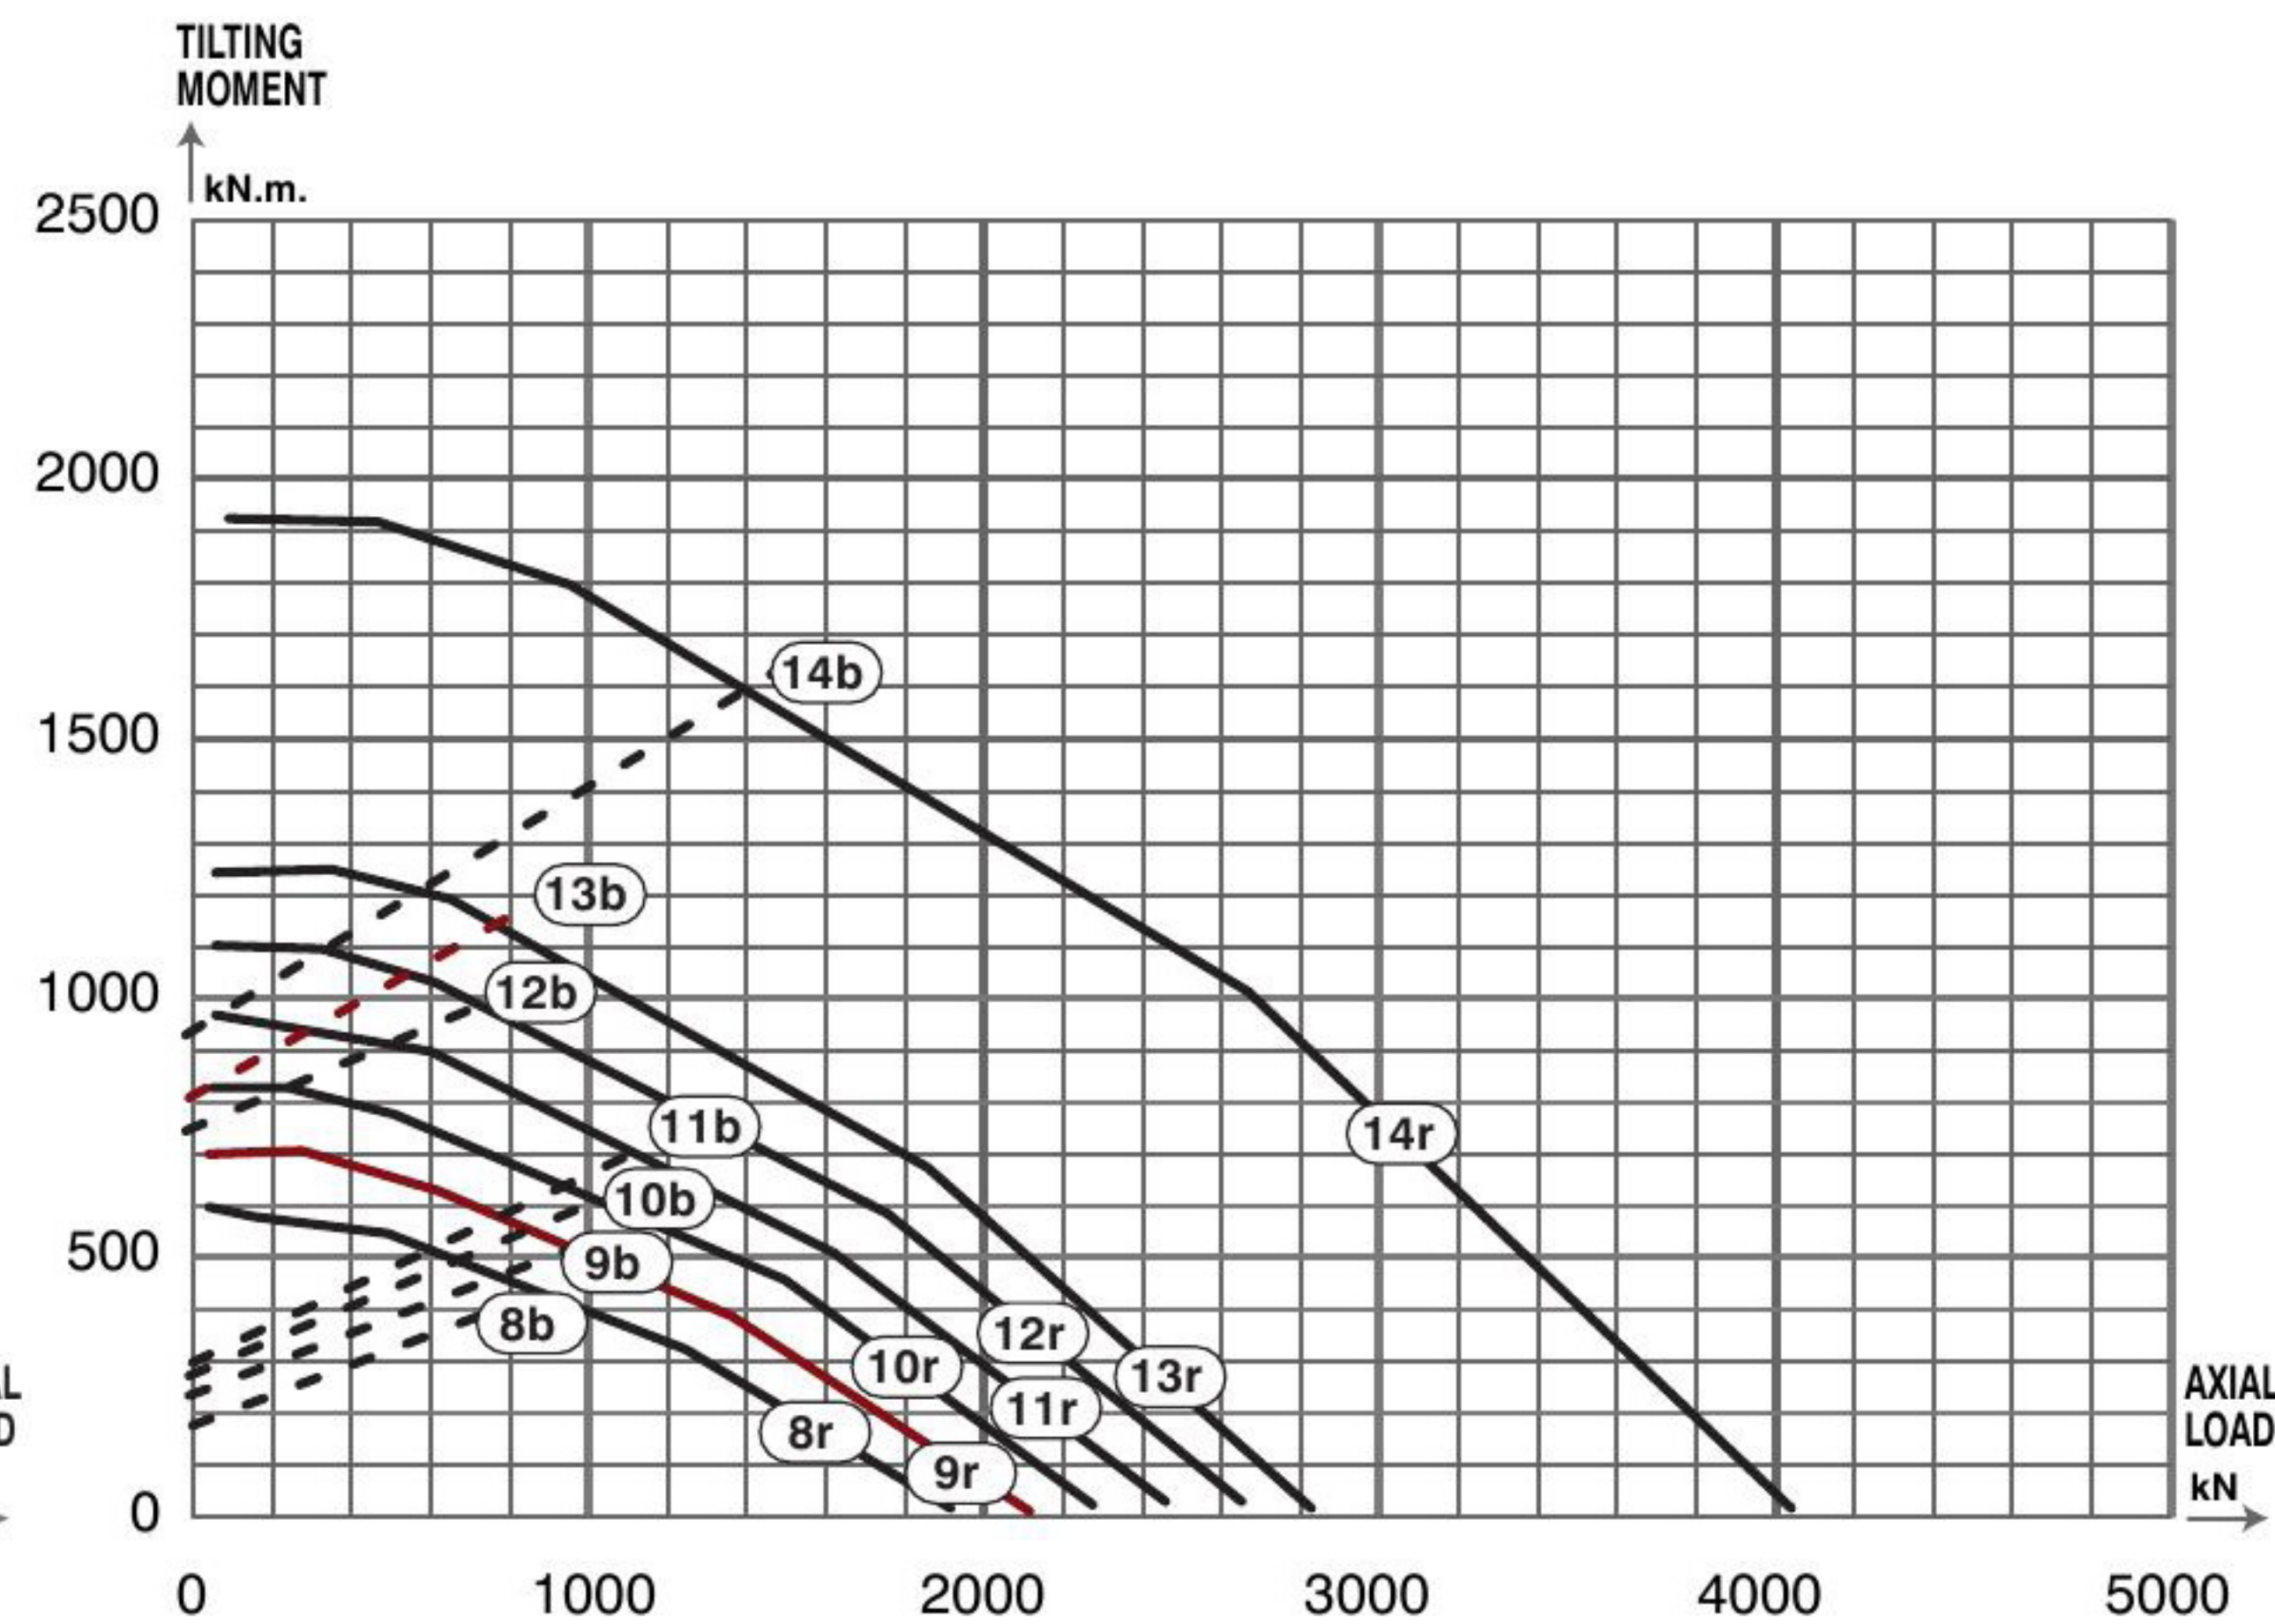

Dm 1204 to 1904 mm

* Item number of the relevant curve in the static limiting load graph for raceway and bolting

Main dimensions			Fixing holes						Mass	Basic load ratin		Fig N°	curves*		Designation
De	Dm	Di	Fe	he	Ne	Fi	hi	Ni		axial dyn. C	axial stat. Co		raceways (r)	bolt (b)	
mm	mm	mm	mm	mm		mm	mm		kg	kN	kN				
486	414	342	460	14	24	368	14	24	29	169	560	E	1r	1b	RKS.060.20.0414
616	544	472	590	14	32	498	14	32	37	188	740	E	2r	2b	RKS.060.20.0544
716	644	572	690	14	36	598	14	36	44	200	880	E	3r	3b	RKS.060.20.0644
816	744	672	790	14	40	698	14	40	52	211	1010	E	4r	4b	RKS.060.20.0744
916	844	772	890	14	40	798	14	40	60	222	1150	E	5r	5b	RKS.060.20.0844
1016	944	872	990	14	44	898	14	44	67	231	1280	E	6r	6b	RKS.060.20.0944
1166	1094	1022	1140	14	48	1048	14	48	77	244	1490	E	7r	7b	RKS.060.20.1094
1289	1204	1119	1257	16	45	1151	16	45	121	371	1943	F	8r	8b	RKS.060.25.1204
1399	1314	1229	1367	16	50	1261	16	50	132	383	2124	F	9r	9b	RKS.060.25.1314
1509	1424	1339	1477	16	54	1371	16	54	143	395	2304	F	10r	10b	RKS.060.25.1424
1619	1534	1449	1587	16	60	1481	16	60	154	406	2485	F	11r	11b	RKS.060.25.1534
1752	1644	1536	1708	22	54	1580	22	54	209	416	2666	F	12r	12b	RKS.060.25.1644
1862	1754	1646	1818	22	60	1690	22	60	222	424	2847	F	13r	13b	RKS.060.25.1754
2012	1904	1796	1968	22	64	1840	22	64	241	571	4048	F	14r	14b	RKS.060.30.1904