


Implantation suivant A

Implantation according to A

Ansicht nach A

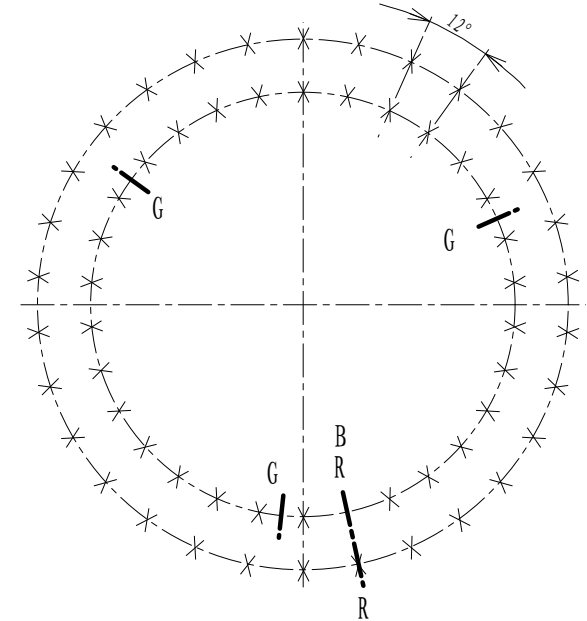

Denture - Gear - Verzahnung	
Droite	
Module <u>6</u>	Angle de pression <u>20°</u>
Module - Modul	Pressure angle
Diametral pitch <u>112</u>	Eingriffswinkel <u>0.50</u>
Nbr. de dents	Troncature - Kopfkürzung
Nr. of teeth - Zahnzahl	
Diamètre primitif <u>672</u>	
Pitch diameter - Teilkreissdurchmesser	
Déport 2 m d <u>6</u>	
Add. mod. 2 m d - Profilschiebung 2 m d	
Cote sur <u>13</u> dents <u>232.566</u>	
Measurement on teeth	
Zahnmessweite bei Zähnen <u>232.386</u>	
Faux rond au diamètre primitif - Run out on P.D. Rundlauffehler am Teilkreis	
Non trempée No hardened Ungelärtet <u>0.36</u>	Trempée Hardened Gehärtet

Tolérances générales suivant IT-ETR-061 General tolerances according to IT-ETR-061 Allgemeine Toleranzen nach IT-ETR-061					
X	R.E. Q.R. A.R.	30	Trous de fixation Mounting holes Befestigungsboreungen	ϕ 17.50	equiv. equis.
	B.I. I.R.	30-1	Trous de fixation Mounting holes Befestigungsboreungen	ϕ 17.50	gl. Abst. equiv.
	R.E. Q.R. A.R.		Trous de graisseurs Grease holes Schmierbohrungen		gl. Abst. equiv.
	B.I. I.R.	3	Trous de graisseurs Grease holes Schmierbohrungen	M 10 x 1.00	gl. Abst. equiv.
	G				
	B Position approximative du bouchon et du raccord de trempé Filler plug and hardening connection of raceway ca Stopfen - und heerteschlupf - position				

	Des. _____
	Date. _____
	Ver. _____
	Date. _____
	Visa _____
	Ech. _____

Masse estimée Gewicht ca Estimated weight	<u> </u> kg <u> </u> lbs
---	---

N° <u>01-0555-01</u>
Indice <u>A</u>
Luoyang Jiecheng Bearing Technology Co., Ltd
Add: D1805, No.3 Lianmeng road, Luoyang, Henan, China. Postal: 471003 Phone: +86-379-68611678 Fa x: +86-379-68611679 E-mail: sales@jcb-bearing.com