


Implantation suivant A
 Implantation according to A
 Ansicht nach A

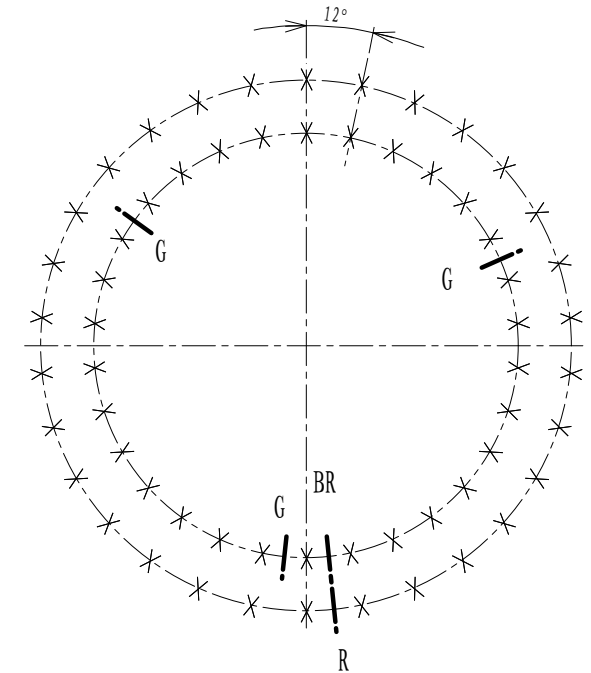

Denture - Gear - Verzahnung	
Droite	
Module <u>8</u>	Angle de pression <u>20°</u>
Module - Modul	Pressure angle
Diametral pitch <u>108</u>	Eingriffswinkel <u>1</u>
Nbr. de dents	Troncature - Kopfkürzung
Nr. of teeth - Zahnezahl	
Diamètre primitif <u>864</u>	
Pitch diameter - Teilkreissdurchmesser	
Déport 2 m d <u>8</u>	
Add. mod. 2 m d - Profilsverschiebung 2 m d	
Cote sur <u>13</u> dents <u>309,643</u>	
Measurement on teeth	
Zahnmessweite bei Zähnen <u>309,643</u>	
Faux rond au diamètre primitif - Run out on P.D. Rundlauffehler am Teilkreis	
Non trempée <u>0.44</u>	Trempée <u>0.59</u>
No hardened	Hardened
Ungelärtet	Gelärtet

Tolérances générales suivant IT-ETR-061 General tolerances according to IT-ETR-061 Allgemeine Toleranzen nach IT-ETR-061					
X	R.E.	30	Trous de fixation	ϕ 22	equiv.
	O.R.		Mounting holes		equiv.
A.R.			Befestigungsborenen		gl. Abst.
G	R.E.	30	Trous de fixation	ϕ 22	equiv.
	O.R.		Mounting holes		equiv.
A.R.			Befestigungsborenen		gl. Abst.
G	R.E.		Trous de graisseurs		equiv.
	O.R.		Grease holes		equiv.
A.R.			Schmierborenen		gl. Abst.
G	R.E.	3	Trous de graisseurs	M 10 x 1.00	equiv.
	O.R.		Grease holes		equiv.
A.R.			Schmierborenen		gl. Abst.

B Position approximative du bouchon et du raccord de trempé Filler plug and hardening connection of raceway ca Stopfen - und heerteschlupf - position	
R	

Masse estimée <u>156</u> kg Gewicht ca <u>156</u> lbs Estimated weight
Des. _____
Date. _____
Ver. _____
Date. _____
Ech. _____

N° <u>06-0734-00</u>
Indice <u>A</u>
<u>Luovang Jiecheng Bearing Technology Co., Ltd</u> Add: D1805, No.3 Lianmeng road, Luoyang, Henan, China. Postal: 471003 Phone: +86-379-68611678 Fa x: +86-379-68611679 E-mail: sales@jcb-bearing.com