


A-A

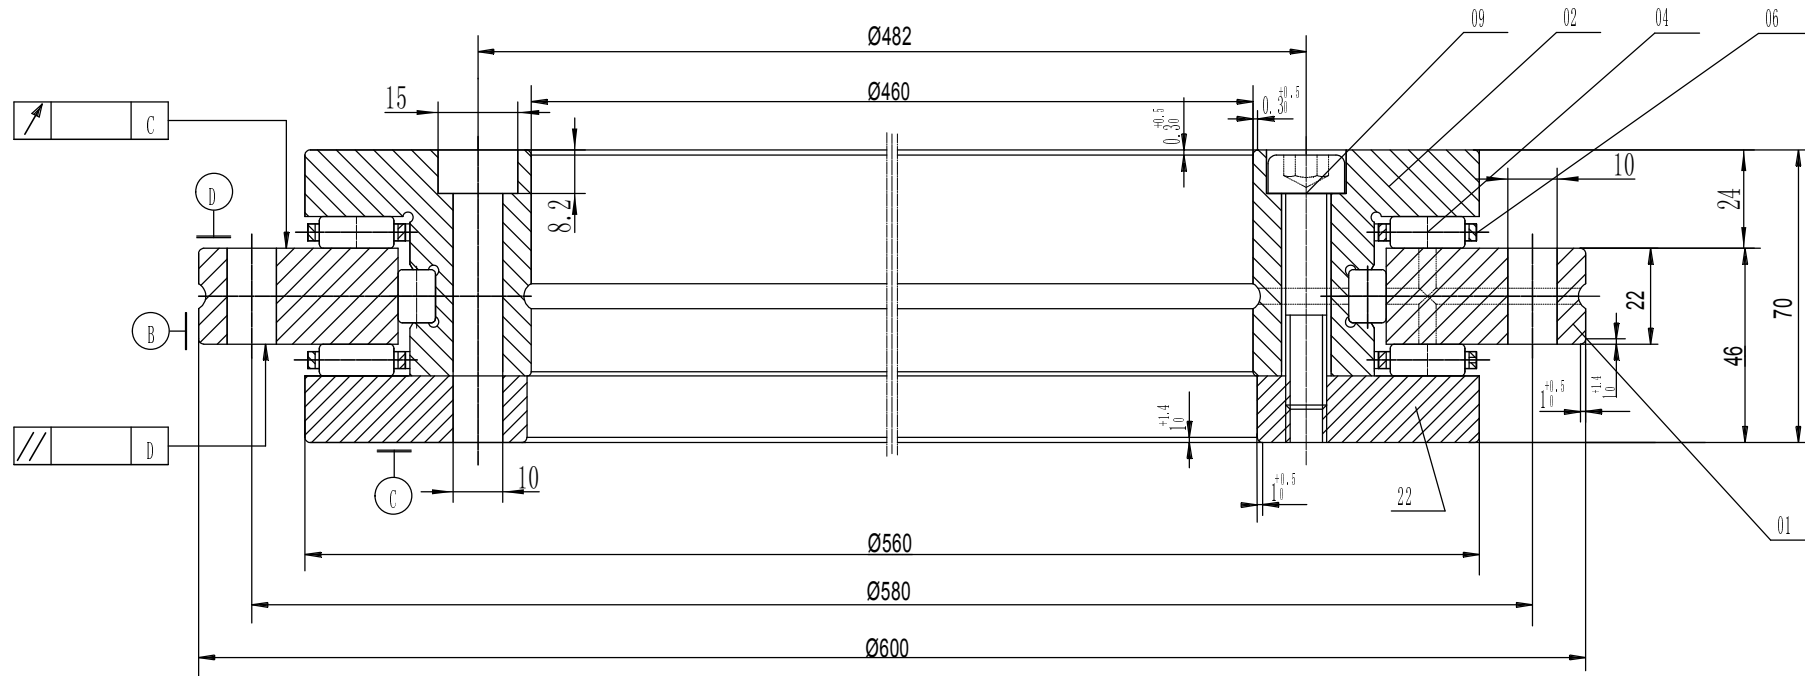

- 1 Axial clearance:Min ,Maximum ; Radial clearance:Min ,Maximum ;
- 2 Starting friction torque is not greater than N m.
- 3 Bolt tightening torque is N m.

**Remark:**

1. Luoyang JCB Bearing Technology Co., Ltd is a technical Inc, specialize in designing and manufacturing YRT Rotary Bearing, we can design and manufactur all kinds of YRT Rotary Bearing according to client's requirement.
2. This drawing is reference for user,if you need formal drawing,please contact wth us sales@jcb-bearing.com, the official drawing will be submitted after order confirmation.

**Contact information**

Company Address : D1805, No.3 Lianmeng road, Luoyang, Henan,China.

Postal code : 471003

Phone : 86-379-68611678 Fax : 86-379-68611679

Msn: jcb-bearing@hotmail.com Skype: jcb-bearing

E-mail: sales@jcb-bearing.com

Reserved E-mail: jcb.bearing@gmail.com

Website: www.jcb-bearing.com

09	Inner hexagon bolts M4×30 GB/T70.1		Steel40Cr-GB/T3077			Standard component: 10.9 grade
06	Retainer		BrassZCuZn40Pb2-GB/T1176			
04	Roller		Steel GCr15-GB/T18254			
04	Roller		Steel GCr15-GB/T18254			
22	The second inner ring		Steel GCr15-GB/T18254			
02	Inner ring		Steel GCr15-GB/T18254			
01	Outer ring		Steel GCr15-GB/T18254			
Parts number (No.)	Designation	qty	Material	Unit	Total	Remark
				Weight (kg)		
YRT Rotary Bearing				<b>YRTS460</b>		
					Weight (kg)	Ratio
				\$	2.4	—
				total 7 page		page 1
Luoyang JCB Bearing Technology Co., Ltd						