



Implantation suivant A
Implantation according to A
Ansicht nach A

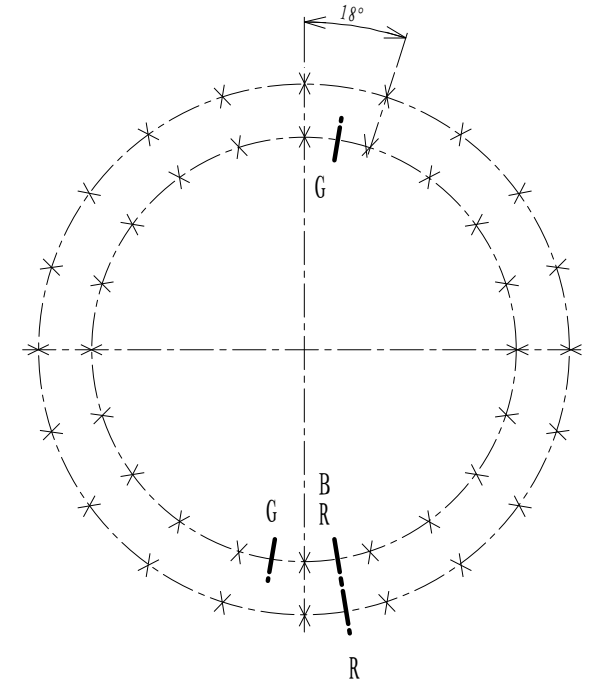

Denture - Gear - Verzahnung	
Droite	
Module — 5	Angle de pression — 20°
Module - Modul	Pressure angle
Diametral pitch	Eingriffswinkel — 0.50
Nbr. de dents — 103	Troncature - Kopfkürzung
Nr. of teeth - Zahnezahl	
Diamètre primitif — 515	
Pitch diameter - Teilkreissdurchmesser	
Déport 2 m d — 5	
Add. mod. 2 m d - Profilverziehung 2 m d	
Cote sur 12 dents — 178.419	
Measurement on teeth	
Zahnmesste bei Zähnen — 178.269	
Faux rond au diamètre primitif - Run out on P.D. Rundlauffehler am Teilkreis	
Non trempée — 0.31	Trempée —
No hardened	Hardened
Ungelärtet	Gelärtet

Tolérances générales suivant IT-ETR-061 General tolerances according to IT-ETR-061 Allgemeine Toleranzen nach IT-ETR-061			
X	B. E.	20	Trous de fixation — φ 17.50 — equid.
	O. R.		Mounting holes — equis.
	A. R.		Befestigungsborungen — gl. Abst.
G	B. I.	20	Trous de fixation — φ 17.50 — equid.
	I. R.		Mounting holes — equis.
	J. R.		Befestigungsborungen — gl. Abst.
	B. E.		Trous de graisseurs —
	O. R.		Grease holes — equid.
	A. R.		Schmierborungen — gl. Abst.
R	B. I.	2	Trous de graisseurs — M 10 x 1.00 — equid.
	I. R.		Grease holes — equis.
	J. R.		Schmierborungen — gl. Abst.
B Position approximative du bouchon et du raccord de trempé Filler plug and hardening connection of raceway			
R ca Stopfen - und heerteschlupf - position			



Masse estimée — 46 — kg	N° 01-0422-01
Gewicht ca — lbs	
	Indice — A
	Luoyang Jiecheng Bearing Technology Co., Ltd
	Add: D1805, No.3 Lianmeng road, Luoyang, Henan, China. Postal: 471003
	Phone: +86-379-68611678
	Fa x: +86-379-68611679
	E-mail: sales@jcb-bearing.com

Des. —
Date. —
Ver. —
Date. —
Ech. —