



Implantation suivant A
 Implantation according to A
 Ansicht nach A

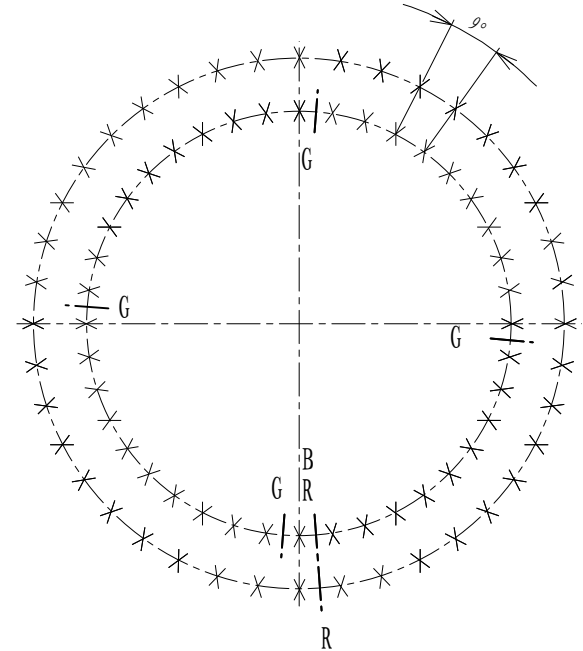

Denture - Gear - Verzahnung	
Droite	
Module <u>10</u>	Angle de pression <u>20°</u>
Module - Modul	Pressure angle
Diametral pitch	Eingriffswinkel
Nbr. de dents <u>133</u>	Troncature <u>1</u>
Nr. of teeth - Zahnezahl	Troncature - Kopfkürzung
Diamètre primitif <u>1330</u>	
Pitch diameter - Teilkreissdurchmesser	
Déport 2 m d <u>10</u>	
Add. mod. 2 m d - Profilverdringung 2 m d	
Cote sur <u>16</u> dents <u>479,094</u>	
Measurement on teeth	
Zahnmessweite bei Zähnen <u>478,794</u>	
Faux rond au diamètre primitif - Run out on P.D. Rundlauffehler am Teilkreis	
Non trempée <u>0.53</u>	Trempée <u>0.68</u>
No hardened	Hardened
Ungelärtet	Gelärtet

Tolérances générales suivant IT-ETR-061 General tolerances according to IT-ETR-061 Allgemeine Toleranzen nach IT-ETR-061				
X	R.E.	40	Trous de fixation ϕ 26	equiv.
	O.R.		Mounting holes	equiv.
	A.R.		Befestigungsboreungen	gl. Abst.
G	R.I.	40	Trous de fixation ϕ 26	equiv.
	I.R.		Mounting holes	equiv.
	A.R.		Befestigungsboreungen	gl. Abst.
B	R.E.		Trous de graisseurs	equiv.
	O.R.		Grease holes	equiv.
	A.R.		Schmierboreungen	equiv.
R	R.I.	4	Trous de graisseurs M 10 x 1.00	gl. Abst.
	I.R.		Schmierboreungen	equiv.
	A.R.		Schmierboreungen	gl. Abst.
B Position approximative du bouchon et du raccord de trempé Filler plug and hardening connection of raceway ca Stopfen - und heerteschlupf - position				



Masse estimée <u>328</u> kg	N° <u>01-1180-00</u>
Gewicht ca <u>328</u> lbs	
Estimated weight	Indice <u>A</u>
Des. _____	Luoyang Jiecheng Bearing Technology Co., Ltd
Date. _____	Add: D1805, No.3 Lianmeng road, Luoyang, Henan, China. Postal: 471003
Ver. _____	Phone: +86-379-68611678
Date. _____	Fa x: +86-379-68611679
Ech. _____	E-mail: sales@jcb-bearing.com
