



Implantation suivant A
 Implantation according to A
 Ansicht nach A

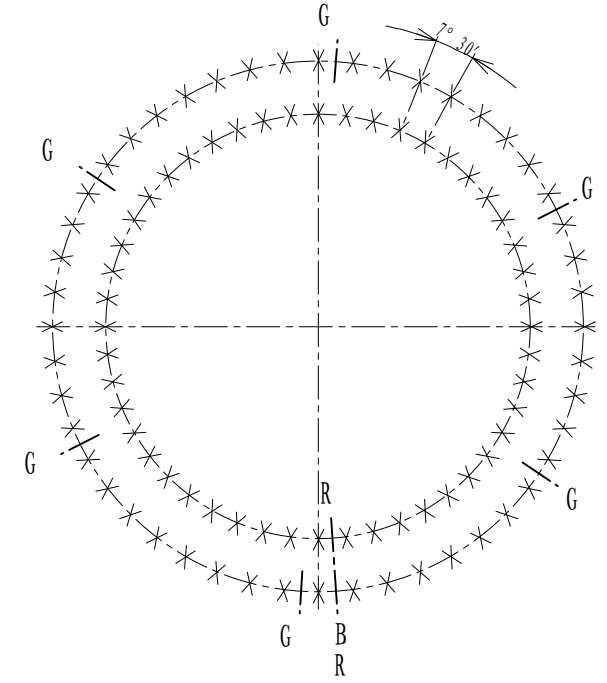

Denture - Gear - Verzahnung	
Droite	
Module 14	Angle de pression 20°
Diametral pitch 108	Pressure angle Eingriffswinkel 1.50
Nbr. of teeth - Zahnzahl 108	Troncature - Kopfkürzung 1512
Diamètre primitif Pitch diameter - Teilkreissdurchmesser 1512	
Déport 2 m d 14	
Add. mod. 2 m d - Profilsverschiebung 2 m d	
Cote sur 13 dents 543.720	
Measurement on teeth Zahnmessweite bei Zähnen 543.300	
Faux rond au diamètre primitif - Run out on P.D. Rundlauffehler am Teilkreis	
Non trempée No hardened Ungehärtet 0.61	Trempée Hardened Gehärtet 0.81

Tolérances générales suivant IT-ETR-061 General tolerances according to IT-ETR-061 Allgemeine Toleranzen nach IT-ETR-061					
X	R.E. Q.R. A.R.	48	Trous de fixation Mounting holes Befestigungsborenen	φ 30	equiv. equiv. gl. Abst.
	R.I. I.R.	48	Trous de fixation Mounting holes Befestigungsborenen	φ 30	equiv. equiv. gl. Abst.
	R.E. Q.R. A.R.	6	Trous de graisseurs Grease holes Schmierborenen	M 10 x 1.00	equiv. equiv. gl. Abst.
	R.I. I.R.		Trous de graisseurs Grease holes Schmierborenen		equiv. equiv. gl. Abst.
	B Position approximative du bouchon et du raccord de trempé Filler plug and hardening connection of raceway ca Stopfen - und heerteschlupf - position				
	R				



Masse estimée Gewicht ca Estimated weight	615 kg lbs
Des.	
Date.	
Ver.	
Date.	
Ech.	

N° 02-1715-00
Indice A
Luoyang Jiecheng Bearing Technology Co., Ltd
Add: D1805, No. 3 Lianmeng road, Luoyang, Henan, China. Postal: 471003 Phone: +86-379-68611678 Fa x: +86-379-68611679 E-mail: sales@jcb-bearing.com