



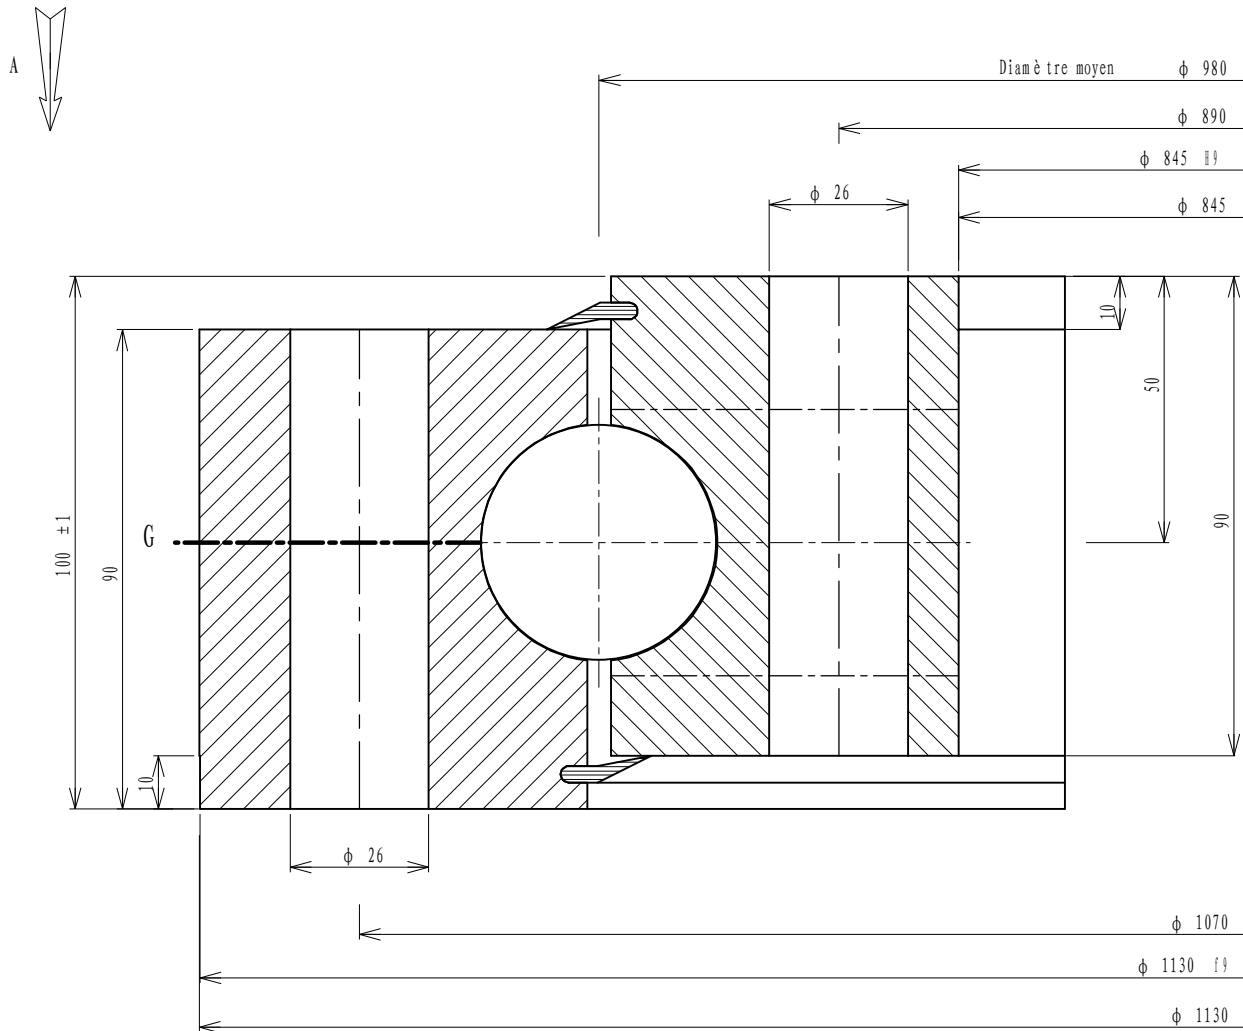

Implantation suivant A
Implantation according to A
Ansicht nach A

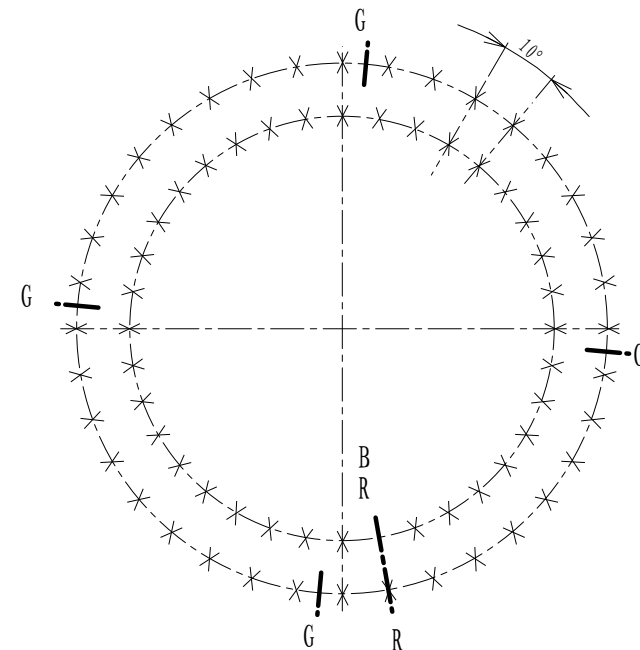

Denture - Gear - Verzahnung		Tolérances générales suivant IT-ETR-061 General tolerances according to IT-ETR-061 Allgemeine toleranzen nach IT-ETR-061								Masse estimée 286 kg Gewicht ca lbs Estimated weight		N° 03-0980-02	
Module _____ Module - Modul _____ Diametral pitch _____ Nbre de dents _____ Nr. of teeth - Zahnezahl _____ Diamètre primitif _____ Pitch diameter - Teilkreisdurchmesser _____ Déport 2 m d _____ Add. mod. 2 m d - Profilverschiebung 2 m d _____ Cote sur _____ dents _____ Zahnmessweite bei Zähnen _____ Faux rond au diamètre primitif - Run out on P.D. Rundlauffehler am Teilkreis _____		Angle de pression _____ Pressure angle _____ Eingriffswinkel _____ Troncature _____ Troncature - Kopfkürzung _____		X B.E. 36 O.R. _____ A.R. _____ Trous de fixation Mounting holes Befestigungsboreungen gl. Abst.		B.L. 36-1 I.R. _____ J.R. _____ Trous de fixation Mounting holes Befestigungsboreungen gl. Abst.		B.E. 4 O.R. _____ A.R. _____ Trous de graisseurs Grease holes Schmierboreungen gl. Abst.		B.L. _____ I.R. _____ J.R. _____ Trous de graisseurs Grease holes Schmierboreungen gl. Abst.		Indice A	
Non trempée No hardened Ungehärtet _____		Trempée Hardened Gehärtet _____		B Position approximative du bouchon et du raccord de trempé Filler plug and hardening connection of raceway ca Stopfen - und heerteschlupf - position		R				Des. _____ Date. _____ Ver. _____ Date. _____ Ech. _____		Luoyang Jiecheng Bearing Technology Co., Ltd Add: D1805, No.3 Lianmeng road, Luoyang, Henan, China. Postal: 471003 Phone: +86-379-68611678 Fa x: +86-379-68611679 E-mail: sales@jcb-bearing.com	