



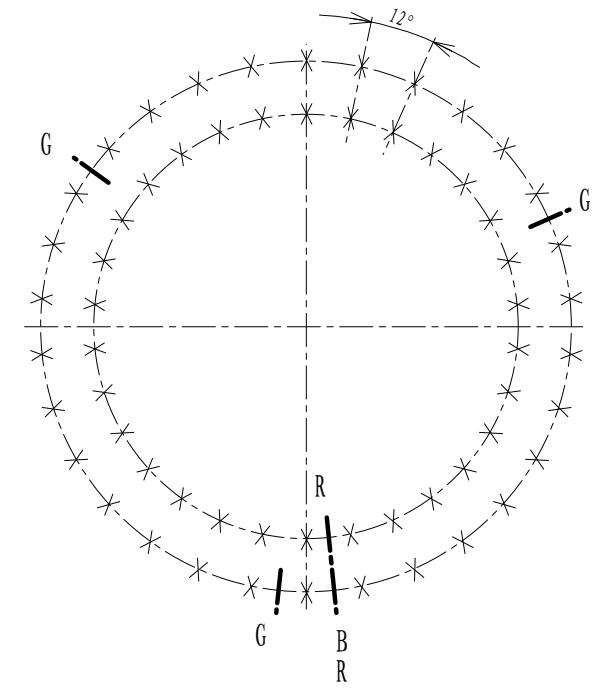

Implantation suivant A
 Implantation according to A
 Ansicht nach A

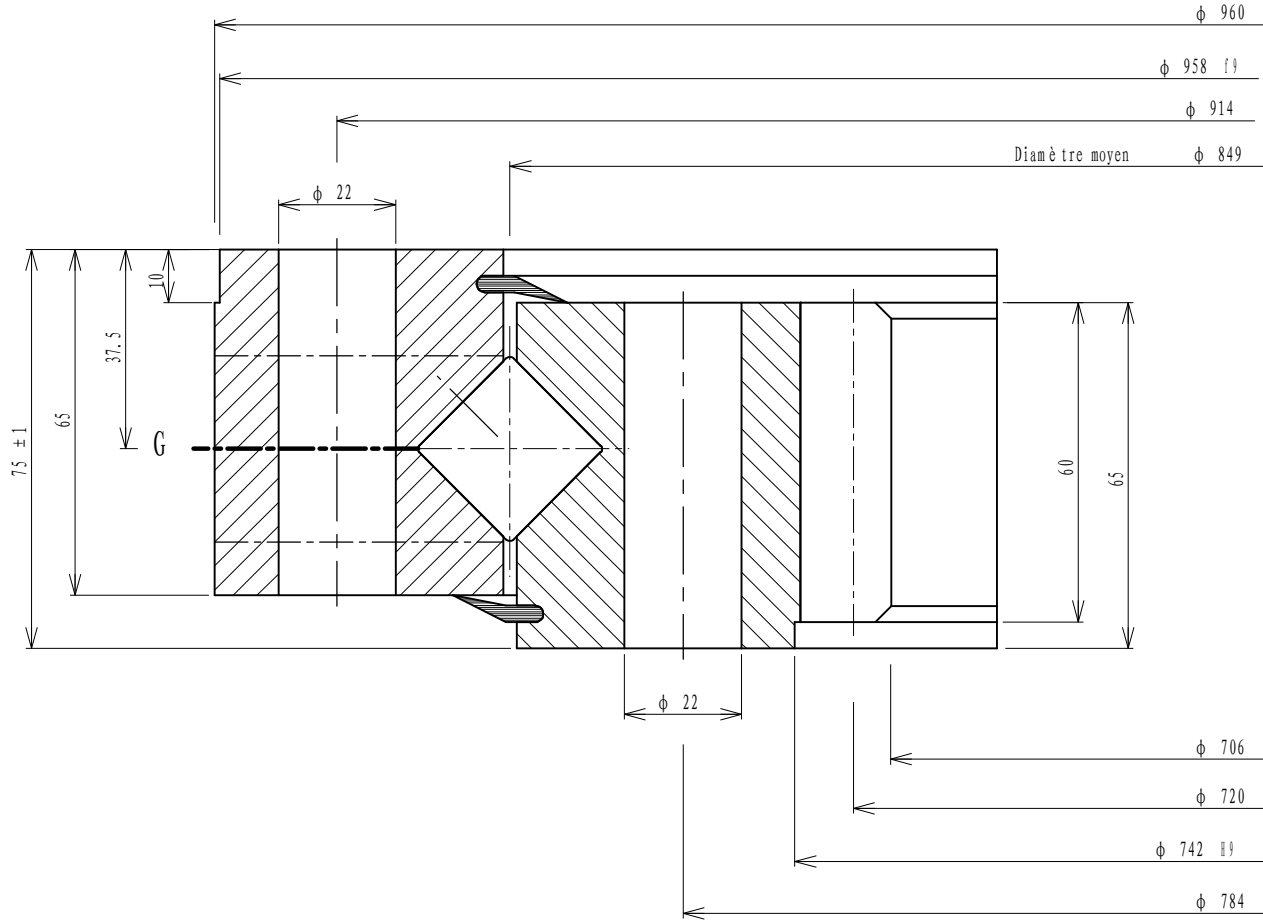

Denture - Gear - Verzahnung	
Droite	
Module - Modul	8
Angle de pression	20°
Diametral pitch	89
Nbr. de dents	1
Nr. of teeth - Zahnezahl	712
Diamètre primitif	8
Pitch diameter - Teilkreissdurchmesser	261.319
Déport 2 m d	261.079
Add. mod. 2 m d - Profilsverschiebung 2 m d	
Cote sur 11 dents	
Measurement on teeth	
Zahnnessweite bei Zähnen	
Faux rond au diamètre primitif - Run out on P.D. Rundlauffehler am Teilkreis	
Non trempée No hardened Ungelärtet	0.43
Trempée Hardened Gehärtet	0.58

Tolérances générales suivant IT-ETR-061 General tolerances according to IT-ETR-061 Allgemeine Toleranzen nach IT-ETR-061					
X	R.E. Q.R. A.R.	30	Trous de fixation Mounting holes Befestigungsborengen	φ 22	equiv. equiv.
	R.I. I.R.	30	Trous de fixation Mounting holes Befestigungsborengen	φ 22	gl. Abst. equiv.
	R.E. Q.R. A.R.	3	Trous de graisseurs Grease holes Schmierbohrungen	M 10 x 1.00	gl. Abst. equiv. equiv.
	R.I. I.R.		Trous de graisseurs Grease holes Schmierbohrungen		gl. Abst. equiv. equiv.
G	R.E. Q.R. A.R.				
	R.I. I.R.				
B Position approximative du bouchon et du raccord de trempé Filler plug and hardening connection of raceway ca Stopfen - und heerteschlupf - position					
R					

Masse estimée Gewicht ca Estimated weight	144 kg lbs	N° 07-0849-00
		Indice A
Luoyang Jiecheng Bearing Technology Co., Ltd		
Add: D1805, No.3 Lianmeng road, Luoyang, Henan, China. Postal: 471003		
Phone: +86-379-68611678		
Fa x: +86-379-68611679		
E-mail: sales@jcb-bearing.com		