


Implantation suivant A  
 Implantation according to A  
 Ansicht nach A

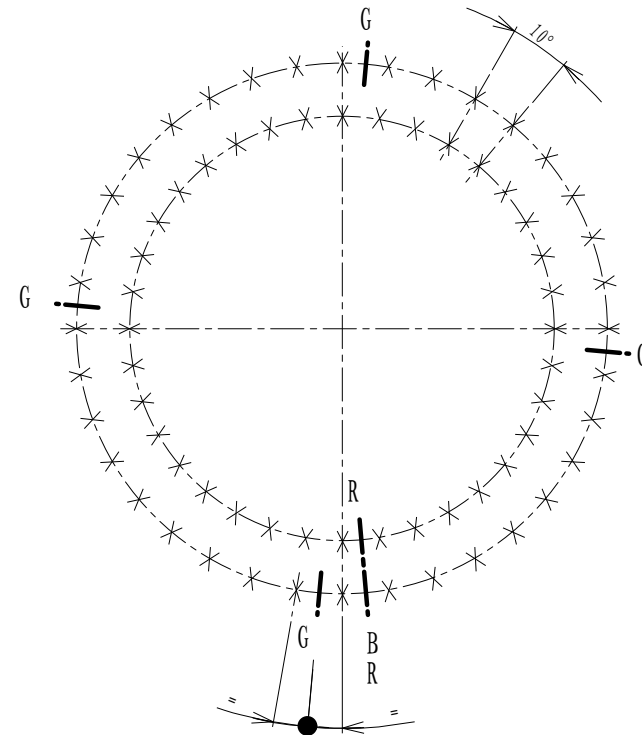

Denture - Gear - Verzahnung	
<b> Droite </b>	
Module <u>10</u>	Angle de pression <u>20°</u>
Module - Modul	Pressure angle
Diametral pitch <u>98</u>	Engriffswinkel <u>0.50</u>
Nbr. de dents	Troncature - Kopfkrümmung
Nr. of teeth - Zahnzahl	
Diamètre primitif <u>980</u>	
Pitch diameter - Teilkreissdurchmesser	
Déport 2 md	
Add. mod. 2 m d - Profilverdrängung 2 m d	
Cote sur <u>12</u> dents <u>354.018</u>	
Measurement on teeth	
Zahnweite bei Zähnen <u>353.718</u>	
Faux rond au diamètre primitif - Run out on P.D. Rundlauffehler am Teilkreis	
Non trempée No hardened Ungelärtet <u>0.55</u>	Trempée Hardened Gehärtet <u>0.70</u>

Tolérances générales suivant IT-ETR-061 et ISO 8015 General tolerances according to IT-ETR-061 and ISO 8015 Allgemeine Toleranzen nach IT-ETR-061 und ISO 8015					
X	R.E. Q.R. A.R.	36	Trous de fixation Mounting holes Befestigungsborengen	M16 Lamés $\phi$ 17	equiv. equiv. gl. Abst.
	R.I. I.R.	36	Trous de fixation Mounting holes Befestigungsborengen	M16	equiv. equiv. gl. Abst.
	R.E. Q.R. A.R.	4	Trous de graisseurs Grease holes Schmierbohrungen	M 10 x 1.00	equiv. equiv. gl. Abst.
G	R.I. I.R.		Trous de graisseurs Grease holes Schmierbohrungen		equiv. equiv. gl. Abst.
	B Position approximative du bouchon et du raccord de trempé Filler plug and hardening connection of raceway ca Stopfen - und heerteschlupf - position				
	R				

	Des. _____
	Date. _____
	Ver. _____
	Date. _____
	Ech. _____

Masse estimée Gewicht ca Estimated weight	<u>181</u> kg _____ lbs
---	----------------------------

N° <u>07-1075-01</u>
Indice <u>A</u>
<u>Luoyang Jiecheng Bearing Technology Co., Ltd</u> Add: D1805, No.3 Lianmeng road, Luoyang, Henan, China. Postal: 471003 Phone: +86-379-68611678 Fa x: +86-379-68611679 E-mail: sales@jcb-bearing.com