


Implantation suivant A
 Implantation according to A
 Ansicht nach A

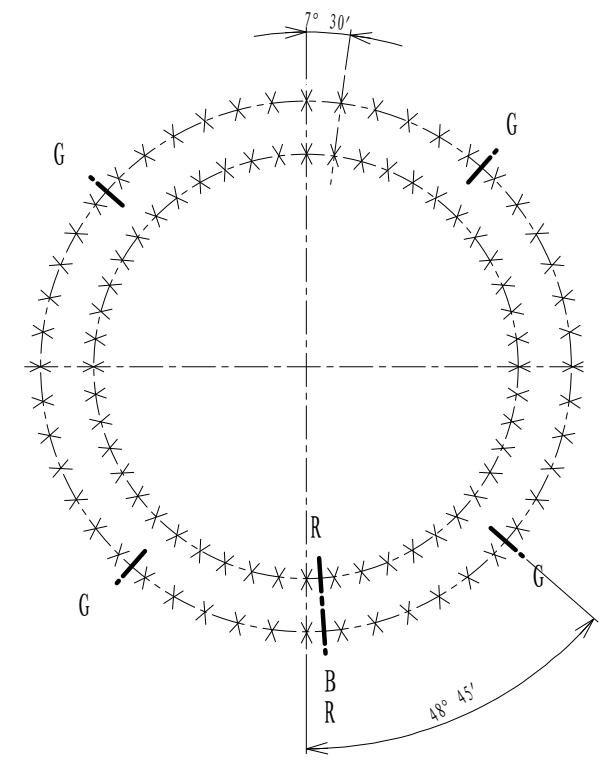

Denture - Gear - Verzahnung	
Droite	
Module <u>14</u>	Angle de pression <u>20°</u>
Module - Modul	Pressure angle
Diametral pitch <u>100</u>	Eingriffswinkel <u>1.50</u>
Nbr. of teeth - Zahnzahl	Troncature - Kopfkurzung
Diamètre primitif <u>1400</u>	
Pitch diameter - Teilkreissdurchmesser	
Déport 2 m d	
Add. mod. 2 m d - Profilschiebung 2 m d	
Cote sur <u>12</u> dents <u>496.021</u>	
Measurement on teeth	
Zahnmessweite bei Zähnen <u>495.601</u>	
Faux rond au diamètre primitif - Run out on P.D. Rundlauffehler am Teilkreis	
Non trempée <u>0.57</u>	Trempée <u>0.77</u>
No hardened	Hardened
Ungelärtet	Gelärtet

Tolérances générales suivant IT-ETR-061 General tolerances according to IT-ETR-061 Allgemeine Toleranzen nach IT-ETR-061					
X	R.E. Q.R. A.R.	48	Trous de fixation Mounting holes Befestigungsboreungen	ϕ 30	equiv. equiv. gl. Abst.
	R.I. I.R.	48	Trous de fixation Mounting holes Befestigungsboreungen	ϕ 30	equiv. equiv. gl. Abst.
	R.E. Q.R. A.R.	4	Trous de graisseurs Grease holes Schmierbohrungen	M 10 x 1.00	equiv. equiv. gl. Abst.
	R.I. I.R.		Trous de graisseurs Grease holes Schmierbohrungen	Lamés ϕ 20 prof. 12	equiv. equiv. gl. Abst.
G	R.E. Q.R. A.R.				
	R.I. I.R.				
B Position approximative du bouchon et du raccord de trempé Filler plug and hardening connection of raceway ca Stopfen - und heerteschlupf - position					

Masse estimée <u>800</u> kg Gewicht ca <u>800</u> lbs Estimated weight	N° <u>07-1606-02</u>
	Indice <u>B</u>
Luoyang Jiecheng Bearing Technology Co., Ltd	
Add: D1805, No.3 Lianmeng road, Luoyang, Henan, China. Postal: 471003 Phone: +86-379-68611678 Fa x: +86-379-68611679 E-mail: sales@jcb-bearing.com	