
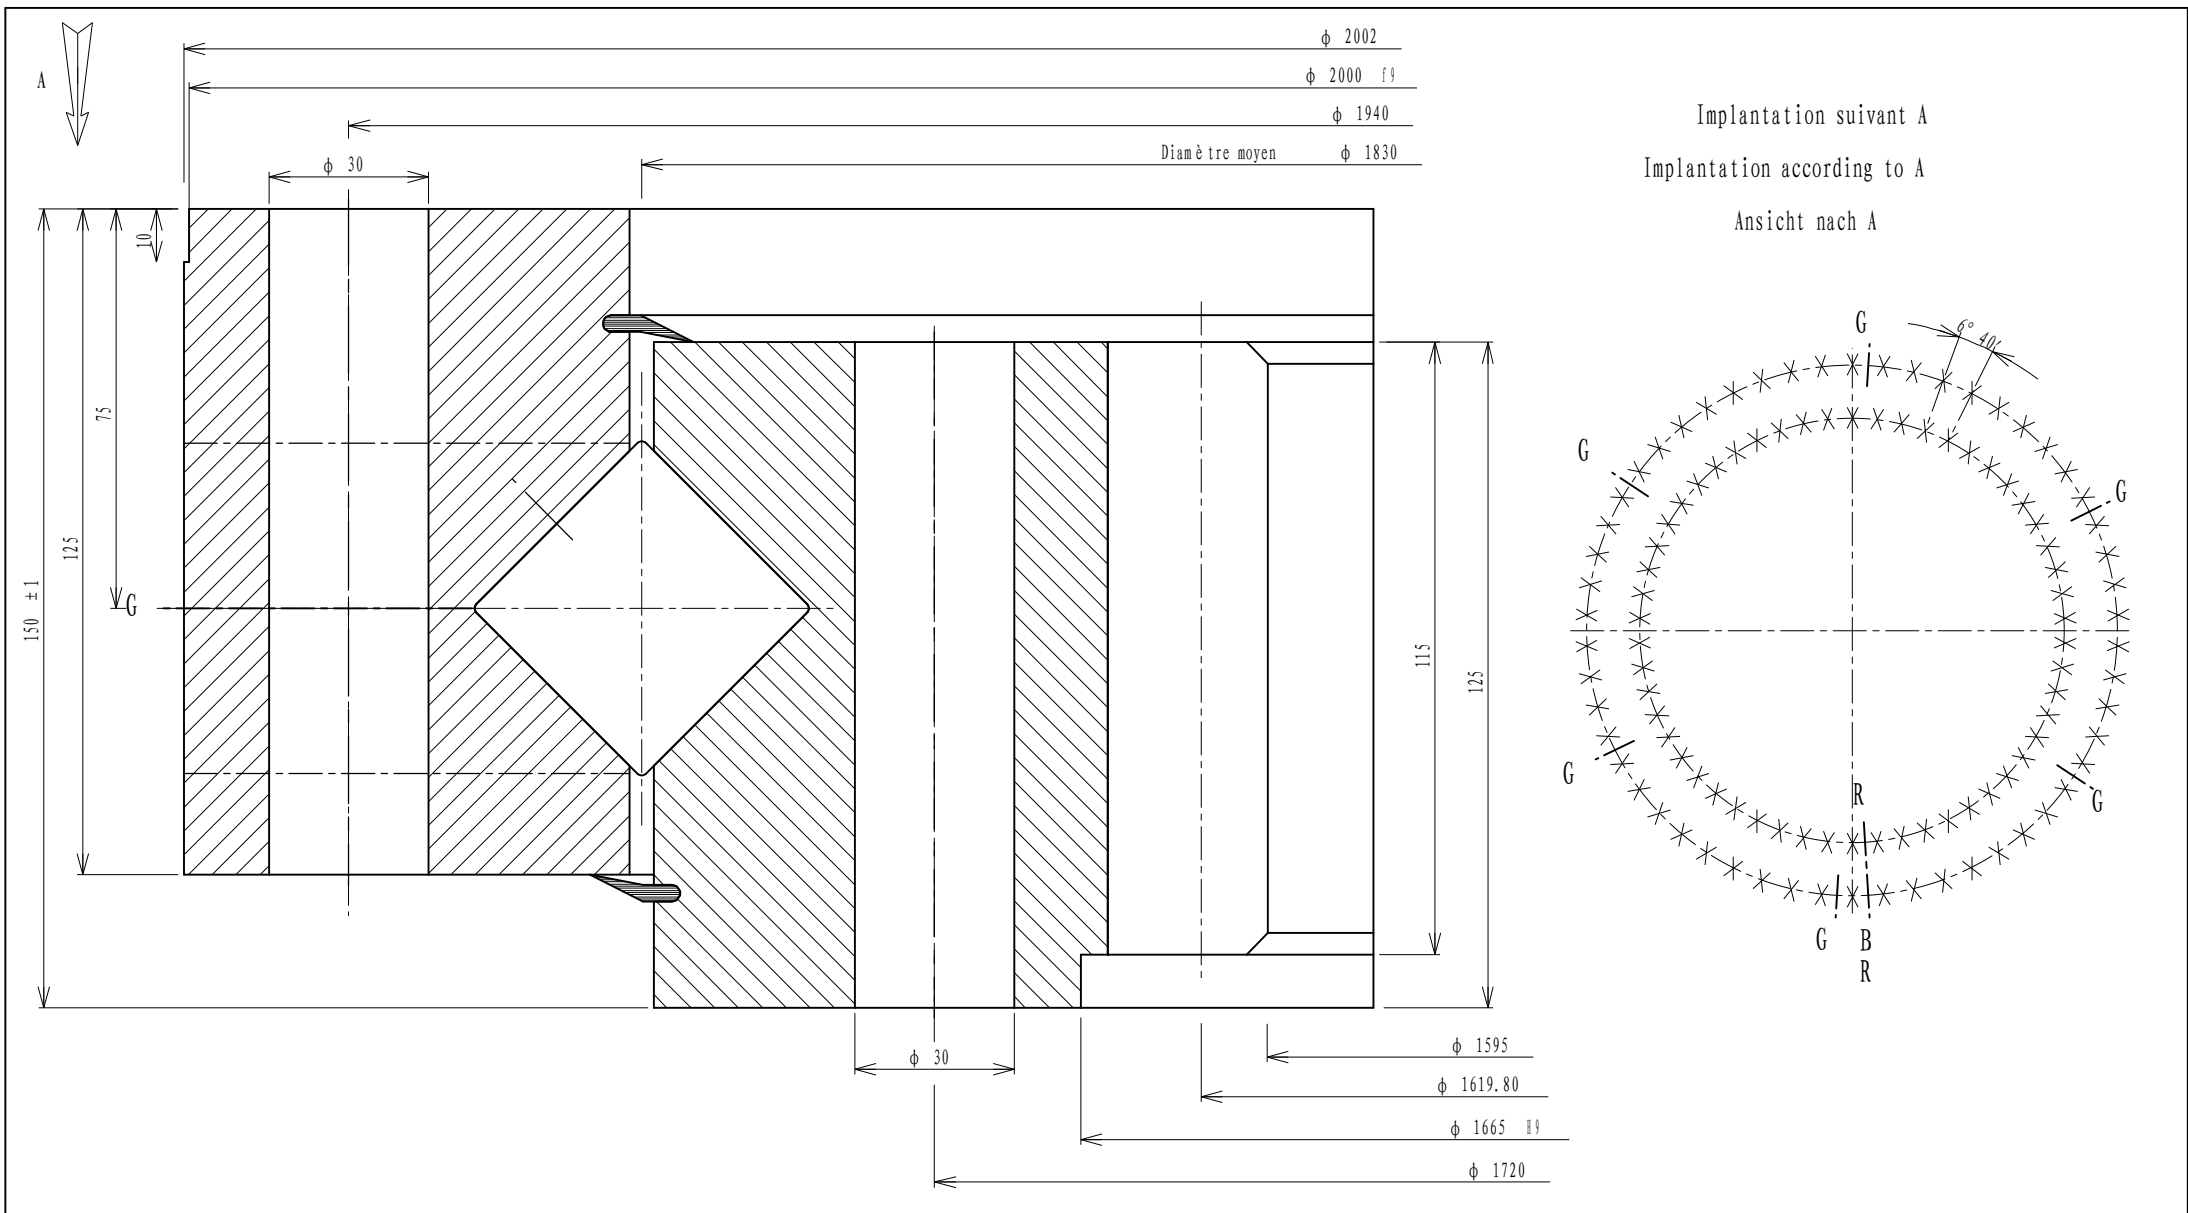




Denture - Gear - Verzahnung Droite			Tolérances générales suivant IT-ETR-061 General tolerances according to IT-ETR-061 Allgemeine toleranzen nach IT-ETR-061						Masse estimée 951 kg Gewicht ca 1bs Estimated weight			N° 07-1830-04		
Module 14 Angle de pression 20° Module - Modul Pressure angle Diametral pitch 115 Engriffswinkel 1.60 Nbre de dents 115 Troncature Nr. of teeth - Zahnzahl Troncature - Kopfkürzung Diamètre primitif 1610 Pitch diameter - Teilkreisdurchmesser Déport 2 m d 9.80 Add. mod. 2 m d - Profilverschiebung 2 m d Cote sur 14 dents 584.996 Measurement on teeth 584.576 Zahnmessweite bei Zähnen 584.576 Faux rond au diamètre primitif - Run out on P.D. Rundlauffehler am Teilkreis			X B.E. 54 Trous de fixation $\phi 30$ equid. O.R. Mounting holes equis. A.R. Befestigungsborengen gl. Abst. B.L. 54 Trous de fixation $\phi 30$ equid. I.R. Mounting holes equis. Befestigungsborengen gl. Abst. B.E. 6 Trous de graisseurs M 10 x 1.00 equid. O.R. Grease holes equis. A.R. Schmierborengen gl. Abst. B.L. Trous de graisseurs equid. I.R. Grease holes equis. Schmierborengen gl. Abst.			Des. _____ Date. _____ Ver. _____ Date. _____ Ech. _____			Indice A <u>Luoyang Jiecheng Bearing Technology Co., Ltd</u> Add: D1805, No.3 Lianmeng road, Luoyang, Henan, China. Postal: 471003 Phone: +86-379-68611678 Fa x: +86-379-68611679 E-mail: sales@jcb-bearing.com					
Non trempée 0.59 No hardened Ungelärtet 0.79 Hardened Gehärtet			B R Position approximative du bouchon et du raccord de trempé Filler plug and hardening connection of raceway ca Stopfen - und heerteschlupf - position											