



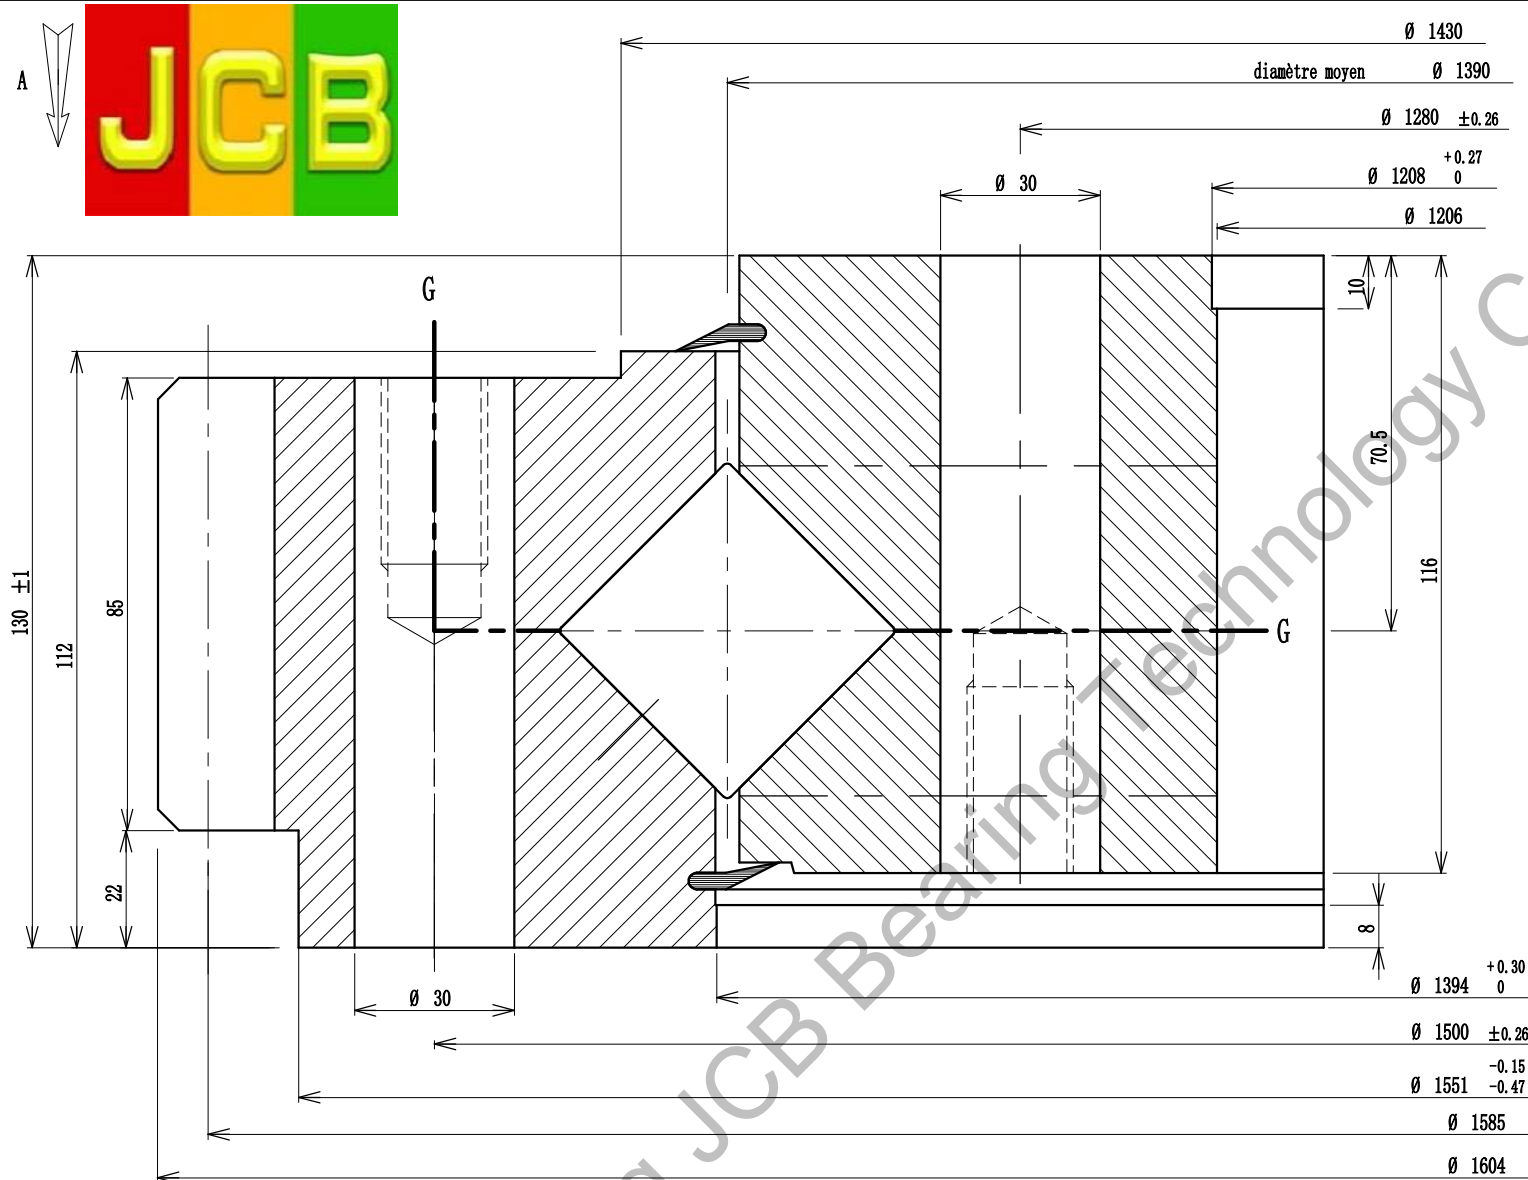

Implantation suivant A
Implantation according to A
Ansicht nach A

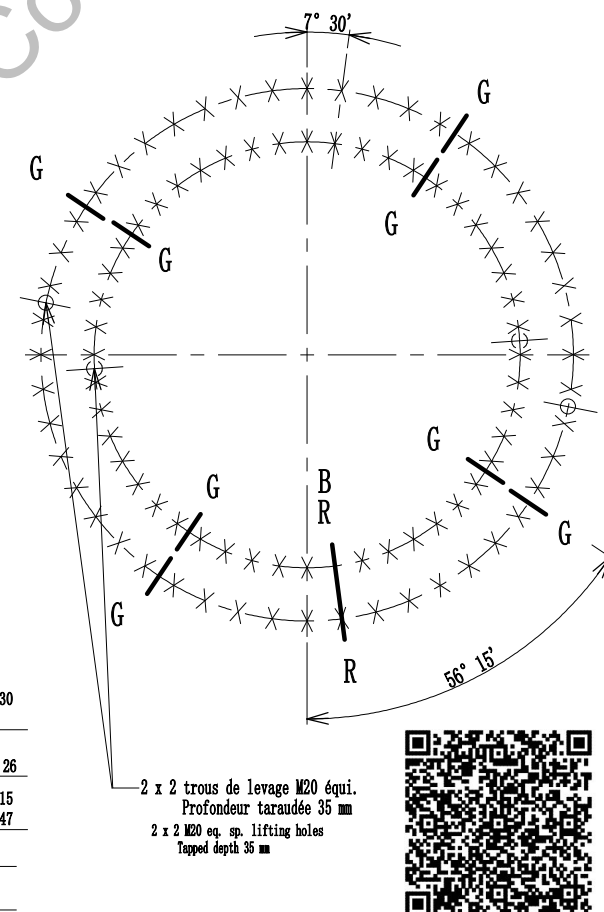

Denture - Gear - Verzahnung	
Droite	
Module 10	Angle de pression 20°
Module - Modul	Pressure angle
Diametral pitch 157	Engriffswinkel 0.50
Mr. of teeth - Zahnzahl	Troncature
Diamètre primitif 1570	Troncature - Kopfkurzung
Pitch diameter - Teilkreisdurchmesser	
Report 2 m d 15	
Add. mod. 2 m d - Profilverschiebung 2 m d	
Cote sur 19 dents 572.710	
Measurement on teeth 572.410	
Zahnmesserweite bei Zähnen	
Faux rond au diamètre primitif - Run out on P.D.	
Rundlauffehler am Teilkreis	
Non trempée 0.55	Trempée 0.75
Unhardened	Hardened
Ungelärtet	Gelärtet

Tolérances générales suivant IT-ETR-061				
General tolerances according to IT-ETR-061				
Allgemeine toleranzen nach IT-ETR-061				
X	R.E. O.R. A.R.	48	Trous de fixation Mounting holes Befestigungsborengen	Ø 30 gl. Abst.
	R.I. I.R. I.R.	48-1	Trous de fixation Mounting holes Befestigungsborengen	Ø 30 gl. Abst.
	R.E. O.R. A.R.	4	Trous de graisseurs Grease holes Schmierborengen	M 10 x 1.00 gl. Abst.
G	R.E. O.R. A.R.	4	Trous de graisseurs Grease holes Schmierborengen	M 10 x 1.00 gl. Abst.
	R.I. I.R. I.R.	4	Trous de graisseurs Grease holes Schmierborengen	M 10 x 1.00 gl. Abst.
	B Position approximative du bouchon et du raccord de trempe			
R	Filler plug and hardening connection of raceway			
	ca Stopfen - und heerteschutz - position			

B	Position approximative du bouchon et du raccord de trempé
R	Filler plug and hardening connection of raceway
	ca Stopfen - und heerteschlupf - position

Des.	
Date.	
Ver.	
Date.	
Ech.	

Masse estimée 646	kg
Gewicht ca	lbs
Estimated weight	

N° 06-1390-03
Indice C
Luoyang JCB Bearing Technology Co., Ltd
Add: No.3 Lianmeng road, Luoyang, Henan, China.
Postal: 471003
Phone: +86-379-68611678
Fax: +86-379-68611679
E-mail: sales@jcb-bearing.com