


Ø3100

| Module | n | 18 | |
|-----------------------|----------------|--------|--|
| Number of teeth | Z | 148 | |
| Addendum modification | X | -0. 50 | |
| Pressure angle | a | 20° | |
| Accuracy grade | 10-ISO 1328/97 | | |



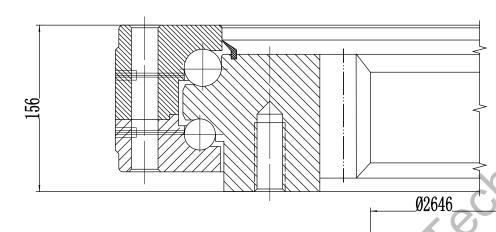

Remark:

- 1. Luoyang JCB Bearing Technology Co., Ltd is a technical Inc, specialize in designing and manufacturing slewing ring bearing, we can design and manufactur all kinds of slewing bearing according to client's requirement.
- 2. This drawing is reference for user, if you need formal drawing, please contact wth us sales@jcb-bearing.com, the official drawing will be submitted after order confirmation.

Contact information

Company Address: No. 3 Lianmeng road, Luoyang, Henan, China.

Postal code: 471003

Phone: 86-379-68611678 Fax: 86-379-68611679

E-mail: sales@jcb-bearing.com

Reserved E-mail: sales@slewing-ring-bearings.com

Website: www.jcb-bearing.com

www.slewing-ring-bearings.com

1 Axial clearance:min , max

2 After assembled C side make mark:

and manufacture No.

| 09 | 9 | Bolt | | | Steel 35-GB/T699 | | |
|----|----|-------------------|--|--|--------------------------|--|--|
| 48 | 8 | Seal | | | I-3 Oil-resisting rubber | | |
| 2 | 6 | second cage | | | Nylon 1010-HG2-869 | | |
| 0 | 6 | cage | | | Nylon 1010-HG2-869 | | |
| 24 | 4 | second ball | | | Steel GCr15-GB/T18254 | | |
| 04 | 4 | ball | | | Steel GCr15-GB/T18254 | | |
| 02 | 2 | outer ring | | | Steel 42CrMo-GB/T3077 | | |
| 21 | 1 | second inner ring | | | Steel 42CrMo-GB/T3077 | | |
| 01 | 1 | inner ring | | | Steel 42CrMo-GB/T3077 | | |
| No | 0. | Items | | | y Material | | |
| | | | | | | | |

Series 840

82-40 2950/2-07635

| | | | | Weight(kg) |
|------|---|---|------|------------|
| S | | | | 1764 |
| Tota | 1 | 4 | page | page 1 |
| | | | | |

Luoyang JCB Bearing Technology Co., Ltd